



ROHS


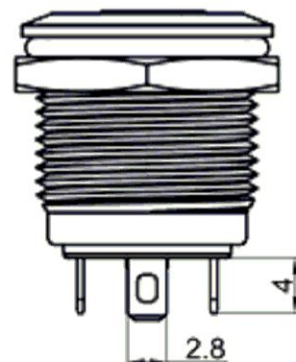


LED端子(镀银)
导电端子(镀金)




Switch Specifications


Rating: 3A 250VAC ;
2A 36VDC ;
Degree of protection: IP65;
Contact Resistance: 50mΩ Max. ;
Dielectric Strength: 1500VAC For 1 minute ;
Total Travel: 1.5 ± 0.5mm ;
Operating Force: 450 ± 150gf ;
Mechanical Life: 200,000 cycles ;
Load Life: 50,000 cycles ;
Operating Temperature: -20° C ~ 70° C ;
Function: OFF-(ON)

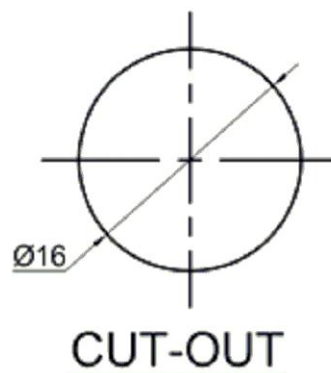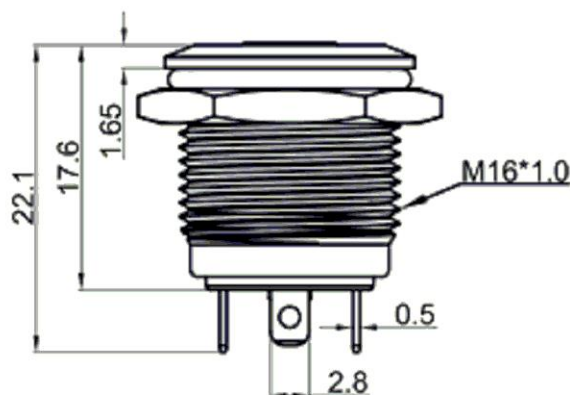

Panel Thickness: 6mm MAX.



说明: 当电源正极接灯端子正极时亮红灯;
当电源正极接灯端子负极时亮蓝灯.

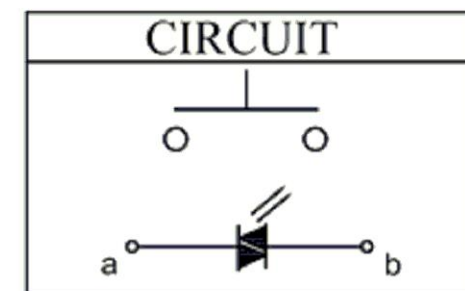

MATERIAL:

Actuator: SUS ;
Top Base: SUS;
Bottom Base: PA66+GF ;
Terminal: Brass, Silver plated ;
Nut: Brass, Ni plated .


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : METAL PUHS BUTTON SWITCH

MODEL : XB-PBM16-11M-F-PU3-S0 双色LED灯



TOLERANCE
≤1.5mm±0.1
> 1.5mm±0.2
>10mm±0.3

ANGLE
±2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING