


ROHS

Switch Specifications
Rating: 5A 250VAC ;
2A 36VDC ;
Degree of protction:IP67;
Contact Resistance: 50mΩ Max. ;
Dielectric Strength:1000VAC For 1 minute ;
Total Travel: 2.8±0.5mm ;
Operating Force:600±200gf ;
Mechanical Life:200,000 cycles ;
Load Life:50,000 cycles ;
Operating Temperature:-20° C~85° C ;
Function: OFF-(ON)

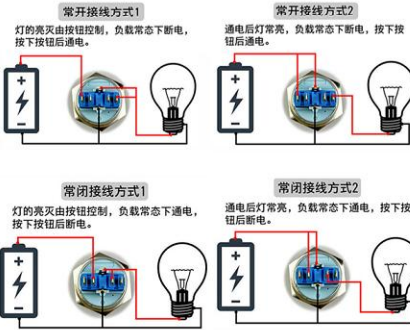

W6	白色	5.0	6.0	9.0	15
U6	蓝色	5.0	6.0	9.0	15
G6	纯绿色	5.0	6.0	9.0	15
Y6	黄色	5.0	6.0	9.0	15
R6	红色	5.0	6.0	9.0	15
W3	白色	2.8	3.0	3.4	15
U3	蓝色	2.8	3.0	3.4	15
G3	纯绿色	2.8	3.0	3.4	15
Y2	黄色	1.8	2.0	2.4	15
R2	红色	1.8	2.0	2.4	15
灯发光颜色 X	最小	一般	最大	额定	
Emitted color X	顺向电压(V)			电流	(mA)


LED Specifications

LED 类型	双向LED灯珠（交直流通用）		
寿 命	40000小时（参考值）		
额定电压	AC/DC12V	AC/DC24V	AC/DC110V
	AC/DC36V	AC/DC48V	AC/DC220V
额定电流	约15mA		约3mA
降压方式	采用3V灯，需内置电阻		

灯发光颜色 X	最小	一般	最大	额定
Emitted color X	顺向电压(V)			电流
				(mA)

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING


注：自復和自鎖總長度不一樣,自鎖長度43mm。

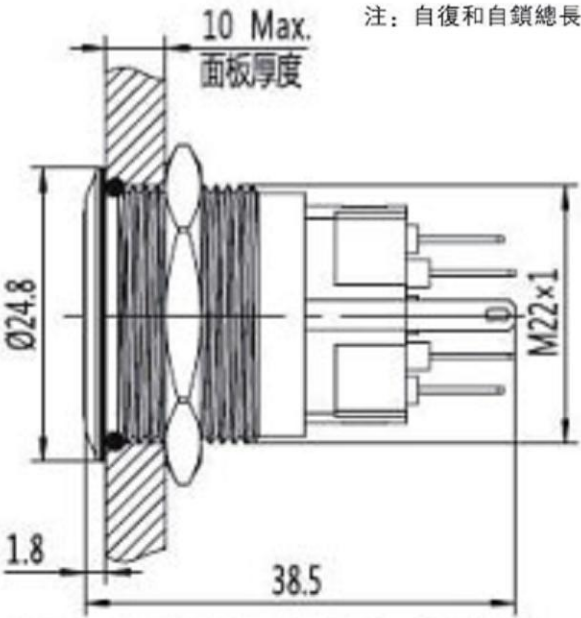

安裝尺寸Diameter: Φ22mm
燈珠顏色Color: R G Y O B W
開關額定值Switch Rating: 5A/250VAC
開關組合Contact Configuration: 1NO 1NC
操作類型Operation Type: 自復型Momentary
自鎖型Maintained(Z)
頭部形狀The Front Shape: 平面 Flat
帶燈方式Lamp type: 單點帶燈Dot Illuminated(LED)
外殼材料
The Crust Material: 不銹鋼Stainless steel
防護等級IP Degree: IP67, IK10

MATERIAL:
Actuator: SUS ;
Top Base: SUS;
Buttom Base:PA66+GF ;
Terminal: Brass,Silver plated ;
Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specifcally authorized by XiBang i5 prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司				
		DONG GUAN XI BANG ELECTRONICS CO.,LTD				
		TITLE : METAL PUHS BUTTON SWITCH				
MODEL : XB-PBM22-12Z-F-DR2-SO						
UNIT : MM		DWN.	ZENQ. CHEN	DATE		
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE		
VERSION	01	APPD.	FEI. LONG. HE	DATE	TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	
					ANGLE ±2°	