

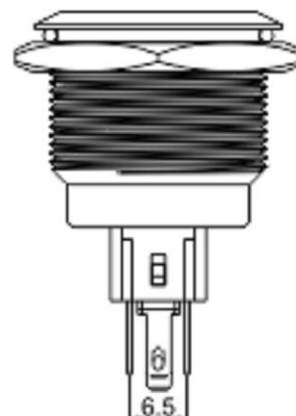
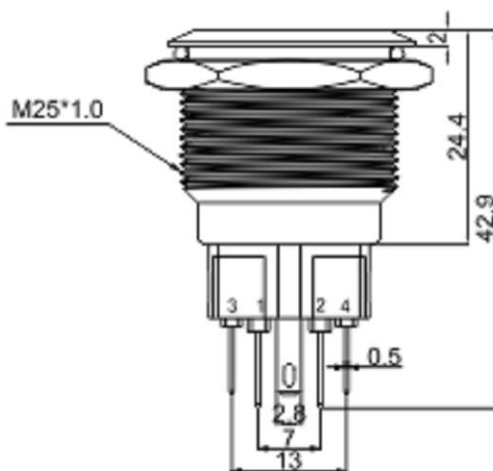




ON(1-2) FREE ON(3-4) LOCK

Rating: 5A 250VAC;; 2A 36VDC;
Contact Resistance: 50mQ Max;
Dielectric Strength: 1500VAC For 1 minute;
Total Travel: 2.8±0.5mm;
Operating Force: 600±200gf
Mechanical Life: 20000 Cycles;
Load Life: 50000 cycles;
Openrating Temperature: -20 ℃~70 ℃
Function:OFF-(ON) ON-OFF



Panel Thickness: 10mm MAX.

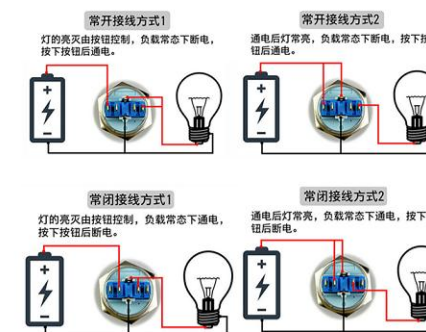

Actuator: SUS ;
Top Base: SUS;
Buttom Base:PA66+GF ;
Terminal: Brass,Silver plated ;
Nut: Brass. Ni plated .


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : METAL PUHS BUTTON SWITCH

MODEL : XB-PBM25-12M-F-NNN-S0



TOLERANCE
 $\leq 1.5\text{mm} \pm 0.1$
 $> 1.5\text{mm} \pm 0.2$
 $\geq 10\text{mm} \pm 0.3$

ANGLE
 $\pm 2^\circ$

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING