


注：自復和自鎖總長度不一樣,自鎖長度43.3mm。

ROHS

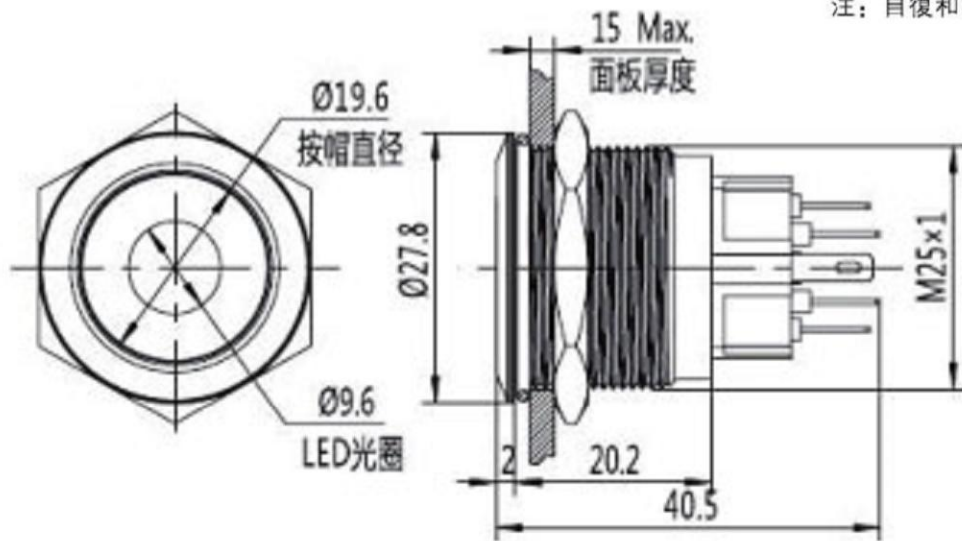

安裝尺寸Diameter: Ø25mm

燈珠顏色Color: R G Y O B W

開關額定值Switch Rating: 5A/250VAC

開關組合

Contact Configuration: 1NO1NC(11)/2NO2NC(22)

操作類型Operation Type: 自復型Momentary

自鎖型Maintained(Z)

頭部形狀The Front Shape: 平面 Flat

帶燈方式Lamp type: 單點帶燈Dot Illuminated(LED)

外殼材料

The Crust Material: 不銹鋼Stainless steel

防護等級IP Degree: IP67, IK10

Switch Specifications

Rating: 5A 250VAC ;

2A 36VDC ;

Degree of protection: IP67;

Contact Resistance: 50mΩ Max. ;

Dielectric Strength: 1000VAC For 1 minute ;

Total Travel: 2.8±0.5mm ;

Operating Force: 600±200gf ;

Mechanical Life: 200,000 cycles ;

Load Life: 50,000 cycles ;

Operating Temperature: -20° C~85° C ;

Function: OFF-(ON)



W6	白色	5.0	6.0	9.0	15
U6	蓝色	5.0	6.0	9.0	15
G6	纯绿色	5.0	6.0	9.0	15
Y6	黄色	5.0	6.0	9.0	15
R6	红色	5.0	6.0	9.0	15
W3	白色	2.8	3.0	3.4	15

LED Specifications

LED 类型	双向LED灯珠（交直流通用）			U3	蓝色	2.8	3.0	3.4	15
寿 命	40000小时（参考值）			G3	纯绿色	2.8	3.0	3.4	15
额定电压	AC/DC12V	AC/DC24V	AC/DC110V	Y2	黄色	1.8	2.0	2.4	15
	AC/DC36V	AC/DC48V	AC/DC220V	R2	红色	1.8	2.0	2.4	15
额定电流	约15mA		约3mA	灯发光颜色 X Emitted color X	最小	一般	最大	额定 电流 (mA)	
降压方式	采用3V灯，需内置电阻				顺向电压(V)				

MATERIAL:

Actuator: SUS ;

Top Base: SUS;

Bottom Base: PA66+GF ;

Terminal: Brass, Silver plated ;


Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.



TITLE : METAL PUHS BUTTON SWITCH

MODEL : XB-PBM25-22Z-F-DR3-S0



TOLERANCE
<=1.5mm±0.1
> 1.5mm±0.2
>=10mm±0.3

ANGLE
±2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING