



ROHS



Wire color(线材颜色)	Function(功能)
1.Orange(橙)	Function<开关功能>
2.White(白色)	Anode(-)<共阴极>
3.Red(红色)	Red(+)<红灯正极>
4.Black(黑色)	Function<开关功能>
5.Green(绿色)	Green(+)<绿灯正极>
6.Yellow(黄色)	

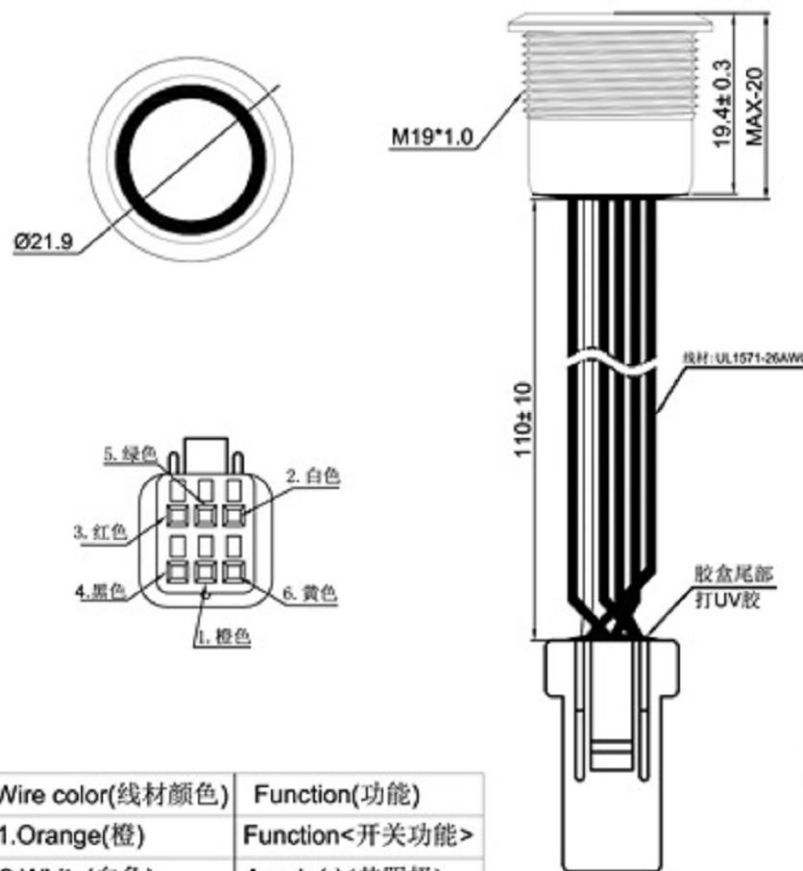

PAD LAYOUT




SPECIFICATIONS

Rating: 1 to 50mA ;
3 to 24VDC ;
Degree of protection: IEC IP67;
Contact Resistance: 100mΩ Max. ;
Dielectric Strength:250 VAC For 1 minute ;
Insulation resistance:100M Ω Min;
Total Travel: 0.8~1.0 mm ;
Operating Force:600± 100gf ;
Operating life: 100,000 cycles Min;
LED Life: 50, 000 hours;
LED Rating: 20mA Max;
3 to 24VDC ;



Switch the material:

- 1.Shell material: SUS;
- 2.Key: PC;
- 3.Back shroud: PA66;
- 4.Supporting plate: POM;

CIRCUIT

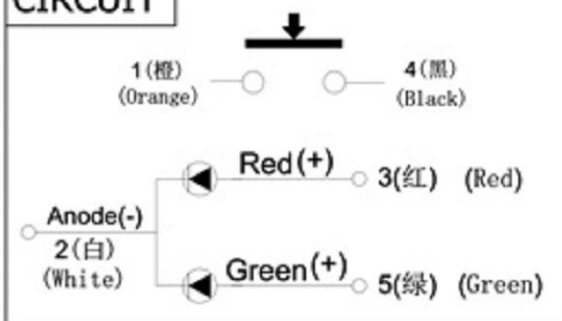

附件(Accessory)




The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : METAL PUHS BUTTON SWITCH

MODEL : XB-PTM19-11M-RRGB-S0 6PIN



TOLERANCE
 $\leq 1.5\text{mm} \pm 0.1$
 $> 1.5\text{mm} \pm 0.2$
 $> 10\text{mm} \pm 0.3$

ANGLE
 $\pm 2^\circ$

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING