

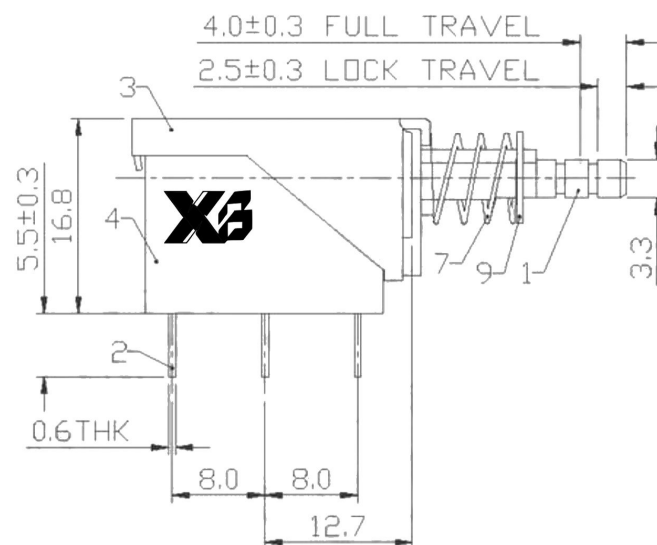


ROHS

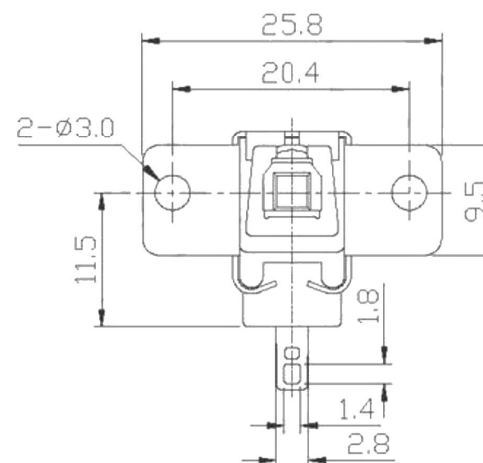

SCHEMATIC

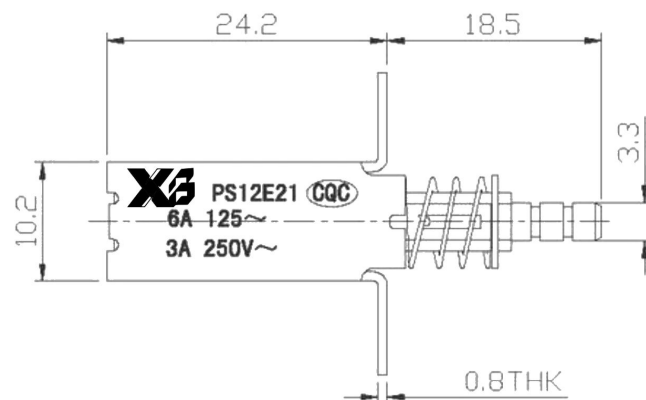

ITEM	PERFORMANCE
Title	PUSHSWICH
Model	
Rating	2A 250V AC / 8A 250V AC
Function	1P1T
Timing	Non-Shorting
ContactResistance(mohms)	30mΩ max
Insulation Resistanc(Mohms)	100mΩ min at 500V DC
Dielectric Strength(V)	AC 500V for 1 min
LifeTest	10000 Cycles



Switch Connector

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : PLASTIC PUSH SWITCH

MODEL : PS12E21 (W009)



TOLERANCE
≤ 1.5 ±0.1
> 1.5 ±0.2
>=10 ±0.3

ANGLE TOL
±2°

UNIT : MM	DWN.	DATE
SCALE : 1.5:1	CHK'D	DATE
VERSION	01	APPD.

10	CONTACT POINT	COPPER	2	Ag PLATED
9	LOCK PLATE	IRON STRIP	1	Ni PLATED
8	CAM STICK	STEEL WIRE	1	NATURE
7	SPRING	STEEL WIRE	1	Ni PLATED
6	CONTACT	PBS STRIP	1	NATURE
5	CONTACT	BRASS STRIP	1	Ag PLATED
4	CASE	PBT	1	BLACK
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	2	Ag PLATED
1	KNOB	PBT	1	BALCK
NO.	PART NAME	MATERIAL	QTY.	FINISHING