

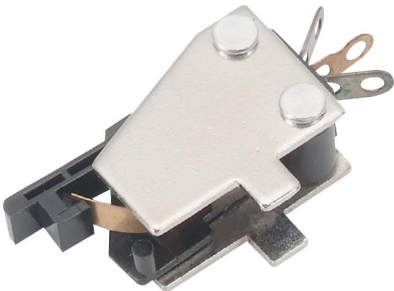


ROHS

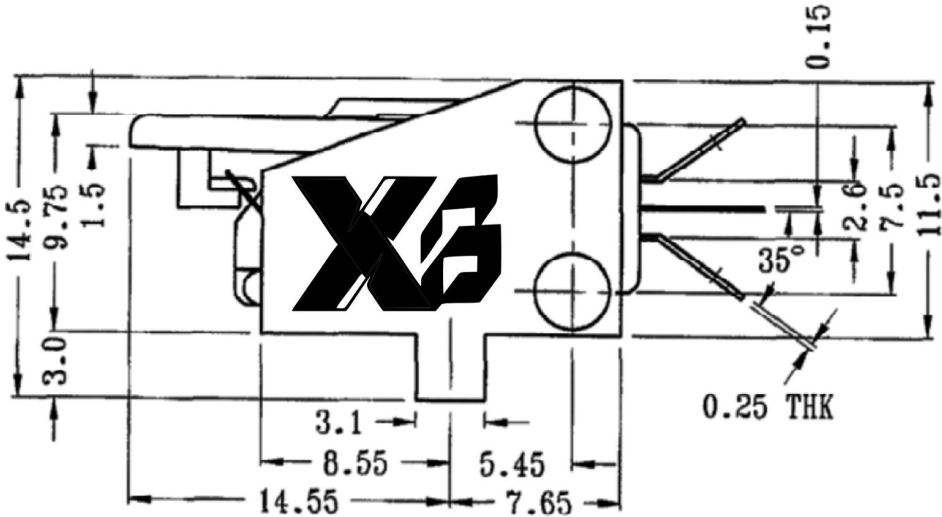

SCHEMATIC

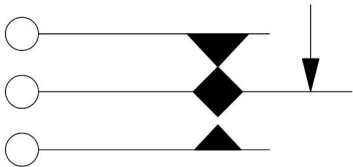


CONTACT PLATING

G = GOLD

N = NICKEL

S = SILVER

X = NIL

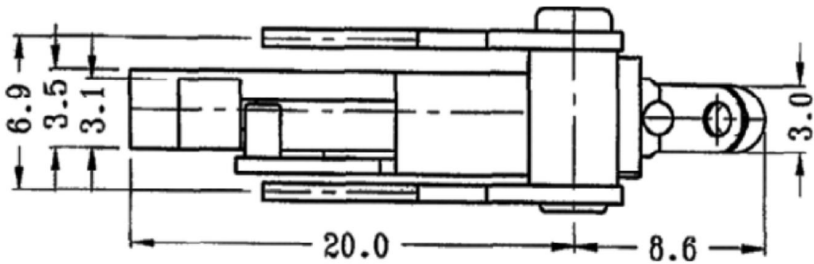


- Product material
- 1. Blade switch
 - 2. Base: POM/PA66
 - 3. Terminal: Phosphorus copper
 - 4. Contact point: Purple copper
 - 5. Electroplating: Silver/Gold Plating
 - 6: Temperature range for use: -10 °C ± 60 °C
 - 7: Current and voltage: 0.5A 12V DC
 - 8: Operating force: 30GF ± 10GF
 - 9: Voltage withstand: 500V 0.5mA/min
 - 10: Insulation resistance: 100M Ω
 - 11: Contact resistance: 30M Ω
 - 12: Lifetime: 50000 times



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : LEAF SWITCH

MODBL : XB-LF-28-BR1



TOLERANCE
≤ 5mm ± 0.1
> 5mm ± 0.2

ANGLE TOL
± 2

UNIT : MM	DWN.	DATE
SCALE : 3 : 1	CHK'D	DATE
VERSION 01	APPD.	DATE

5	CONTACT	COPPER	1	Ag PLATED
4	SPRING	BRASS STRIP	2	Ag PLATED
3	SPRING	PBS	2	NATURE
2	COVER	POM	1	BLACK
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING