



ROHS

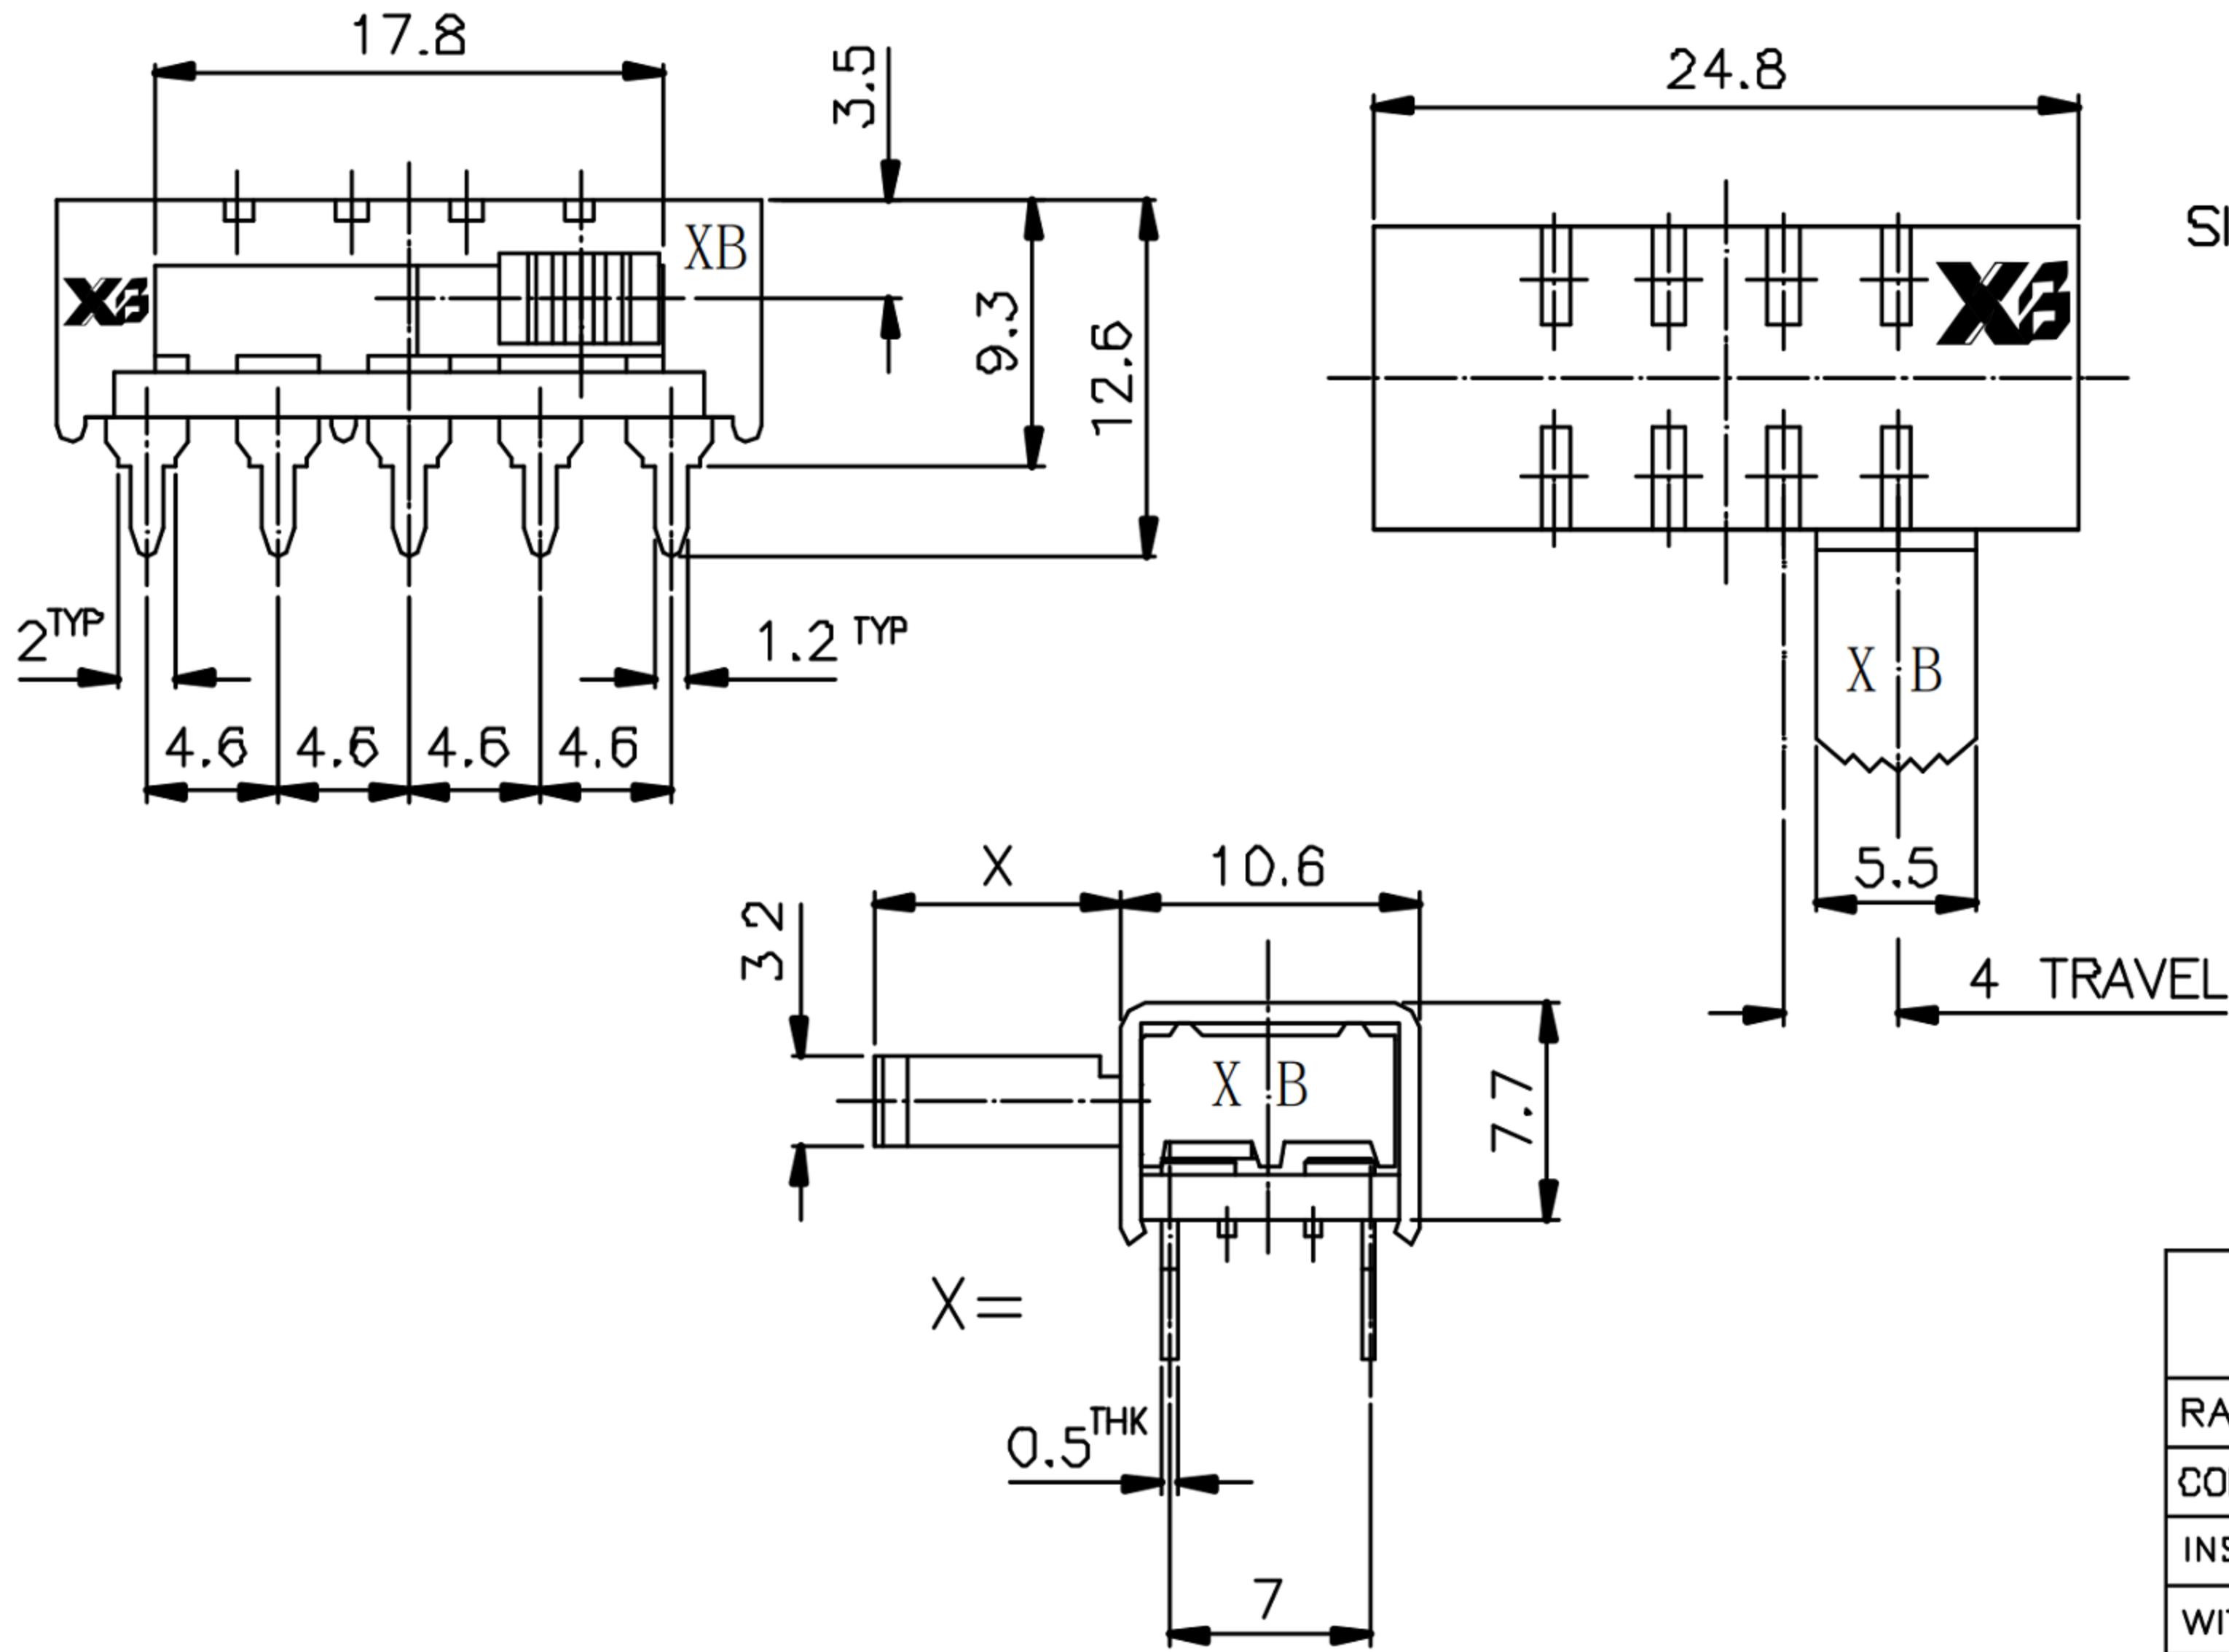

SIDE KNOB SLIDE SWITCH 1P4T

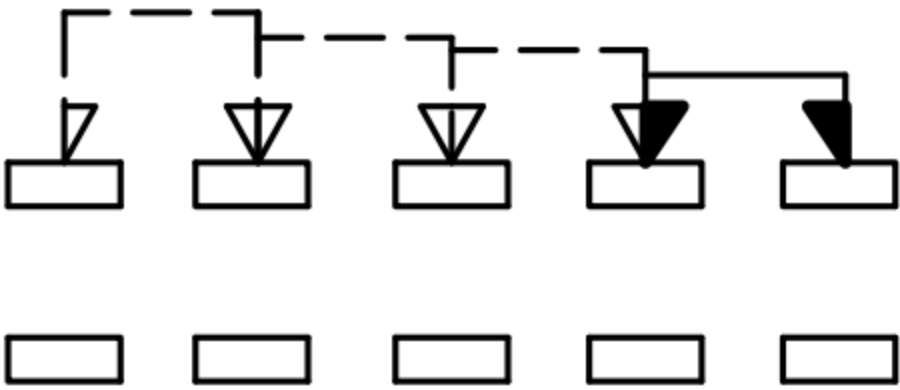

SPECIFICATION (INITIAL)				
RATING:		AC 125V 3A		
CONTACT RESISTANCE:		Not more than 30mΩ		
INSULATION RESISTANCE:		500MΩ at 500V DC		
WITHSTAND VOLTAGE:		AC 1000V for 1 min		
OPERATION FORCE:		160 ± 80 gm		
SWITCHING LIFE:		10,000 Cycles(6-10c/m loading)		

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD										
		TITLE : HORIZONTAL SLIDE SWITCH							7	SPRING	STEEL WIRE	1
MODEL : XB-WK-14H01T					6	STEEL BALL			STEEL	1	NATURE	
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°	5	BOARD	PHENOLIC RESIN	1	NATURE
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE				4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
VERSION 01		APPD.	FEI. LONG. HE	DATE				3	FRAME	IRON STRIP	1	Ni PLATED
								2	TERMINAL	BRASS STRIP	8	Ag PLATED
								1	KNOB	POM	1	BLACK
								NO.	PART NAME	MATERIAL	QTY.	FINISHING