



Unit: mm



ROHS

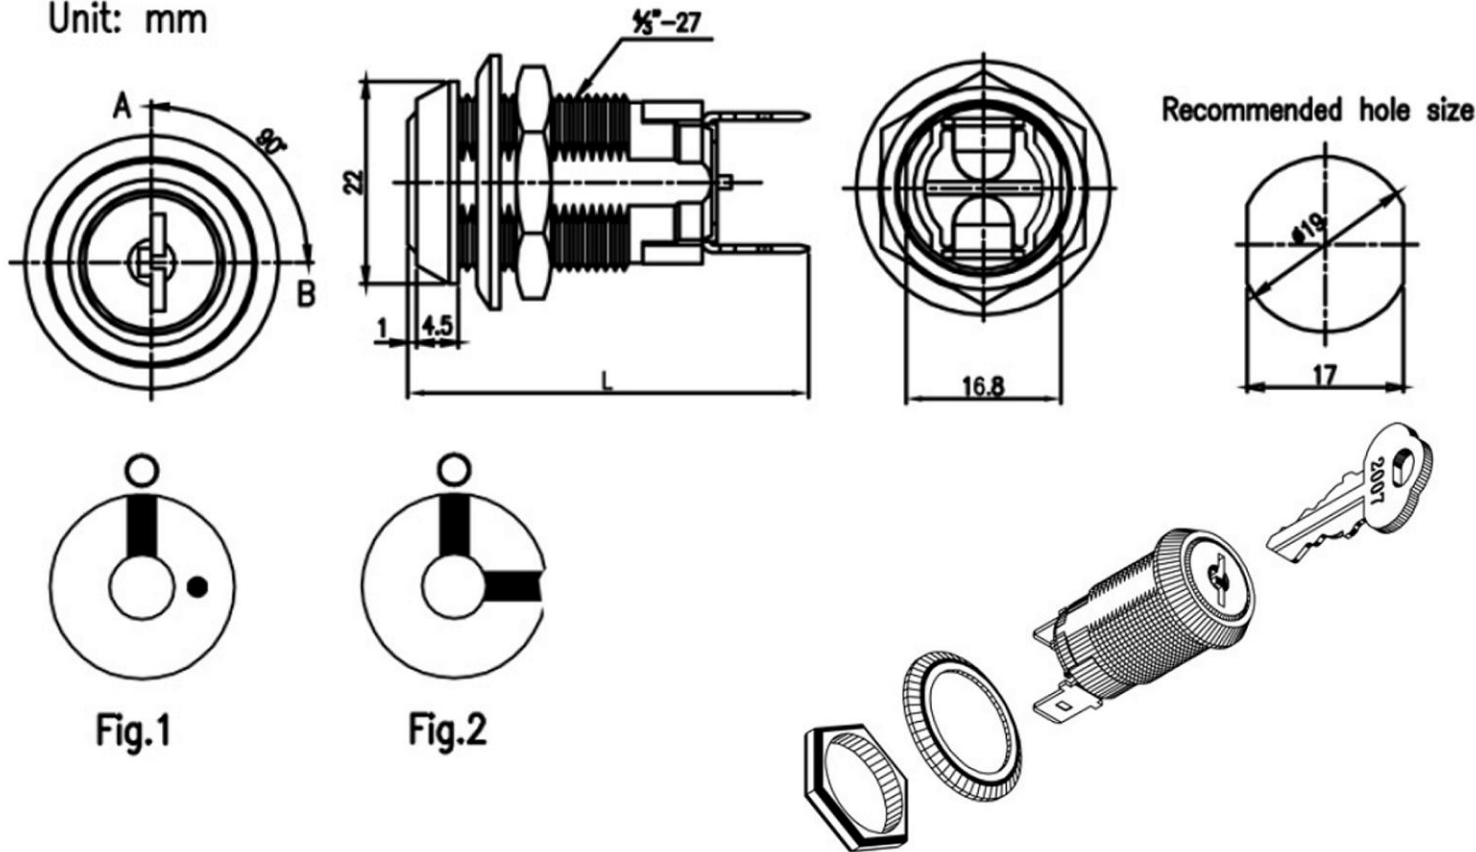

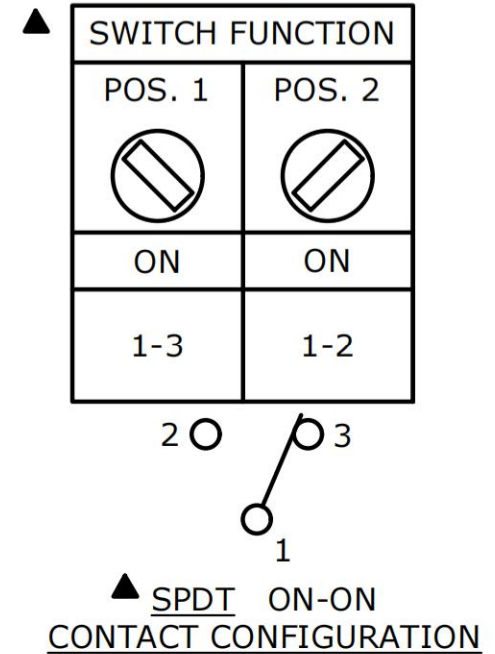


Zinc alloy die cast housing and cylinder.
Bright chrome plated standard.
11 disc tumbler mechanism.
Double-bitted brass keys
S203A 2 position (off-on) 2 spade terminals.
S203AM 2 position (off-on) 2 spade terminals, spring loaded for momentary contact.
Hex nut mounted.
Contact Rating: 4A 125VAC, 2A 250VAC.
Contact Resistance: 50Milli-Ohms Max.
Insulation Resistance: 500 Meg-Ohms Min. (500VDC)
Dielectric Strength: 1500 VAC -1 Minute.

Fig No	Lock Number	Pole	Positions	Terminals	Key Pulls	Turn	⬆	⬇	Type
1	S203A-1	1	2	2	1	90°	Off	On	SPST
2	S203A-2	1	2	2	2	90°	Off	On	SPST
1	S203MA	1	2	2	1	90°	Off	(On)	SPST

Lock Number	L1
S203A	43.4
S203AM	51.3

() : Momentary Contact

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD														
		TITLE : XB KEY SWITCH ELECTRONIC LOCK														
		MODEL : XB-S-203A														
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE ≤1.5mm±0.1 > 1.5mm±0.2 ≥10mm±0.3	ANGLE ±2°									
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE												
VERSION 01		APPD.	FEI. LONG. HE	DATE												
										7	SPRING	STEEL WIRE	1	NATURE		
										6	STEEL BALL	STEEL	1	NATURE		
										5	BOARD	PHENOLIC RESIN	1	NATURE		
										4	CONTACT CLIP	PBS STRIP	2	Ag PLATED		
										3	FRAME	IRON STRIP	1	Ni PLATED		
										2	TERMINAL	BRASS STRIP	8	Ag PLATED		
										1	KNOB	POM	1	BLACK		
										NO.	PART NAME	MATERIAL	QTY.	FINISHING		