

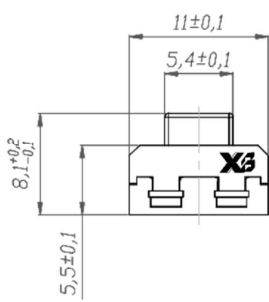
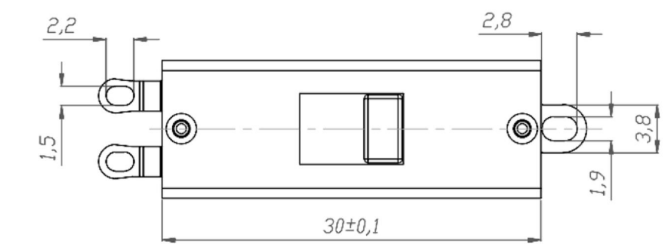



ROHS

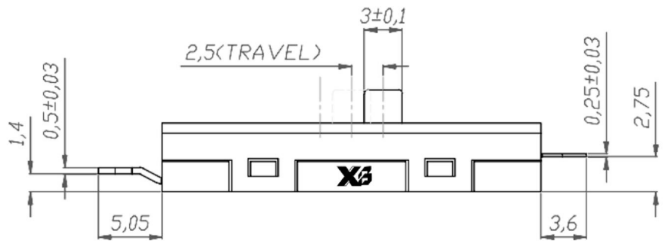


线 路 图
CIRCUIT DIAGRAM



电 流 电 路
CURRENT CIRCUIT

CIRCUIT:002

位置POSITION	电路CIRCUIT
1(INITIAL)起始	OFF
2	C+2
3	C+1+2

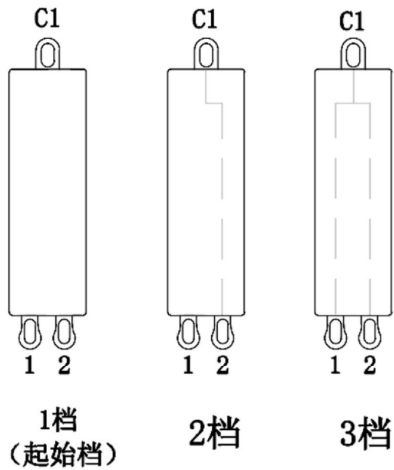

- 1.滑动开关型号 SLIDE SWITCH MODEL: KND-1-MS002-R2
- 2.焊线端子 SOLDER CONNECTOR TYPE:
单刀三掷, 多回路 SINGLE POLE THREE THROW, MULTI-CIRCUIT
- 3.额定值 RATING: 10A 250VAC μ T85 (CQC)
10(2)A 250VAC μ T85 (ENEC17;NEMKO)
7(2)A 250VAC μ T85 (ENEC17;NEMKO)
- 4.接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
- 5.绝缘电阻 INSULATION RESISTANCE: $\geq$ 100M Ω (DC500V/1MIN)
- 6.介电强度 DIELECTRIC STRENGTH: 1500V /0.5mA /1MIN
- 7.机械寿命 MECHANICAL LIFE: >50000 CYCLES
- 8.电气寿命 ELECTRICAL LIFE: >10000 CYCLES
- 9.端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX350°C, 3S
- 10.操作力 OPERATION FORCE:550 $\pm$ 150gf
- 11.所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB SLIDE SWITCH
MODEL : XB-KND-1-MS002-R2



UNIT : MM	DWN.	DATE	2011-11-19	TOLERANCE	ANGLE
SCALE : 4 : 1	CHK'D	DATE		$\leq$ 1.5mm $\pm$ 0.1	$\pm$ 2°
VBRSION	01	APPD.	DATE	$>$ 1.5mm $\pm$ 0.2	
				$\geq$ 10mm $\pm$ 0.3	

NO.	PART NAME	MATERIAL	QTY.	FINISHING
8	SEAL PLATE	SUS	2	NATURE
7	STEEL BALL	STEEL	1	NATURE
6	SPRING	SUS	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	1	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	4	Ag PLATED
1	KNOB	POM	1	BLACK