
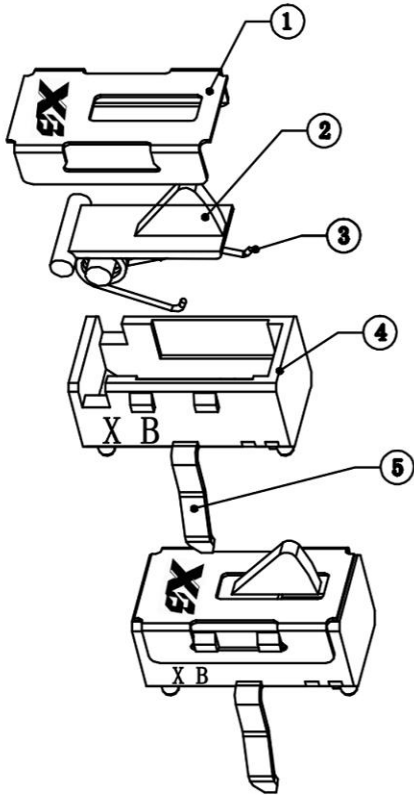


ROHS

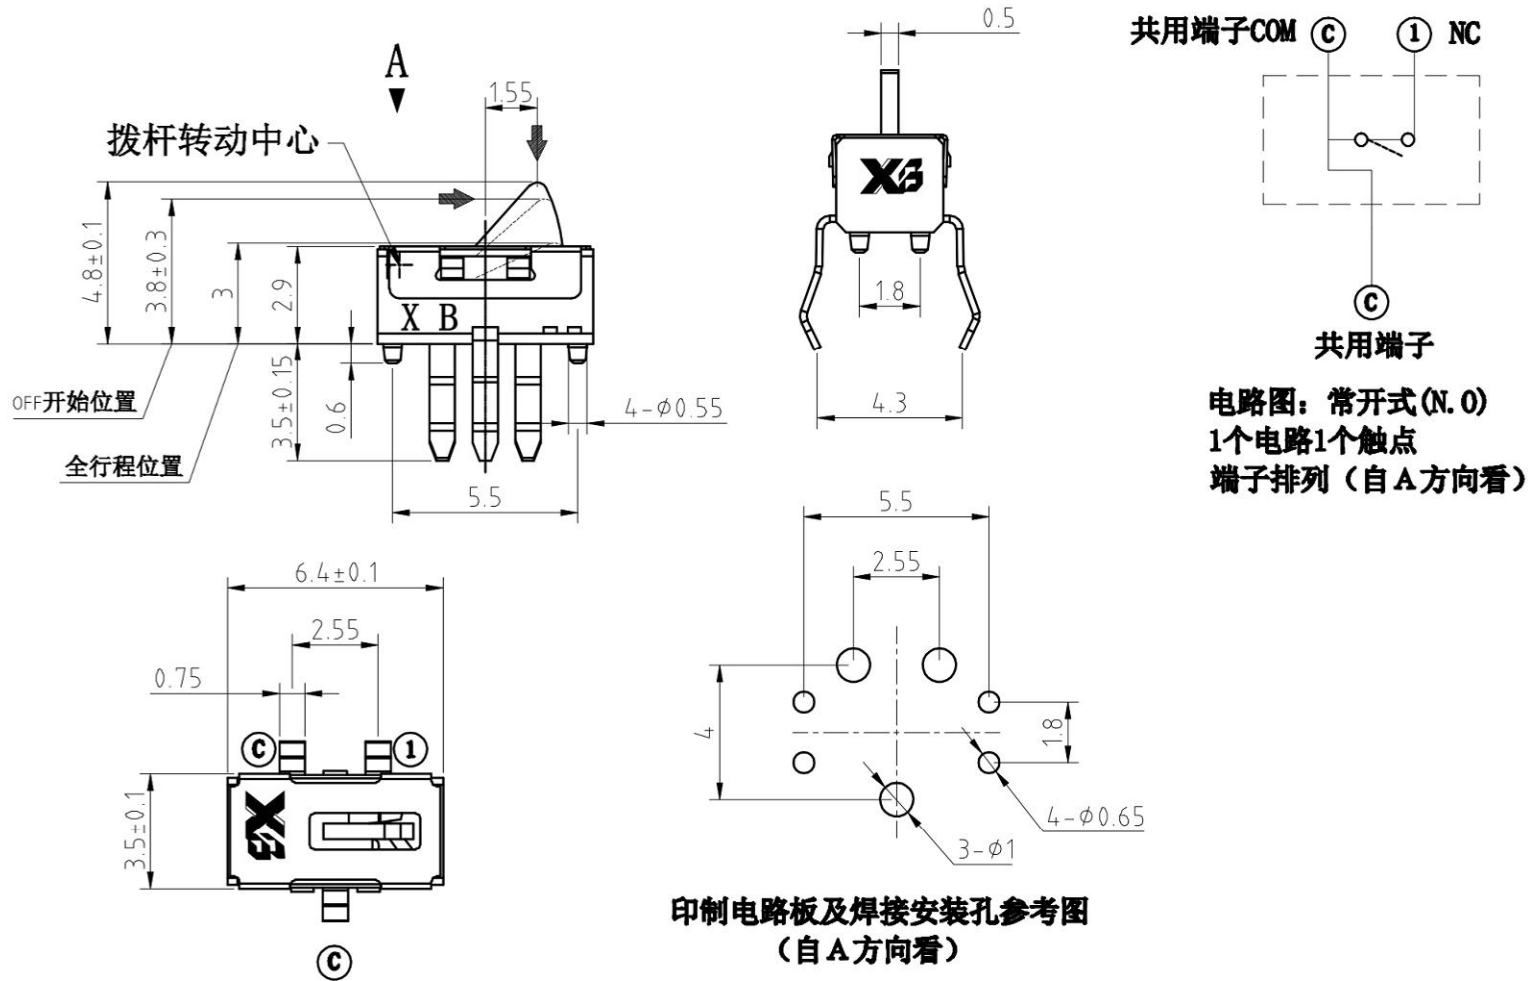

SPECIFICATION (INITIAL)

RATING:	
CONTACT RESISTANCE:	MAX 30mΩ
INSULATION RESISTANCE:	500MΩ AT 500V DC
WITHSTAND VOLTAGE:	AC 250V FOR 1 MIN
OPERATION FORCE:	30gf±10gf
SWITCHING LIFE:	100000 Cycles(6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD													
					TITLE : XB DETECTION SWITCH								
					MODEL XB-TM-VT-07D-CB-D带柱（常闭型）单触点								
UNIT : MM		DWN.	GAO. PENG	DATE		TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 ≥10.0mm ± 0.3	ANGLE TOL ± 2°	8	REEL	PS	1	BLUE	
SCALE : 5 : 1		CHK'D	PANG. DONG	DATE				7	CARRIER	PS	1	CLEAR	
VERSION		01	APPD.	HE. LONG. FEI	DATE				6	COVER TAPE	PS	1	CLEAR
									5	CONTACT	PBS STRIP	1	Ag CLAD
								4	COVER	IRON STRIP	1	Ni PLATED	
								3	CASE	NYLON	1	BLACK	
								2	TERMINAL	BRASS STRIP	2	Ag PLATED	
								1	KNOB	NYLON	1	BLACK	
								NO.	PART NAME	MATERIAL	QTY.	FINISHING	