



ROHS

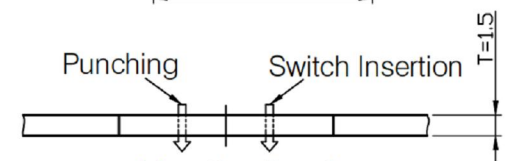


SCHEMATIC

Mounting Hole Dimensions

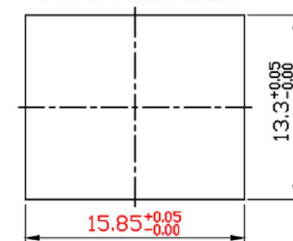



Mounting Panel Hole Dimensions

- LED (RGB)
1、Red
2、COMMON Anode
3、Pure Green
4、Blue

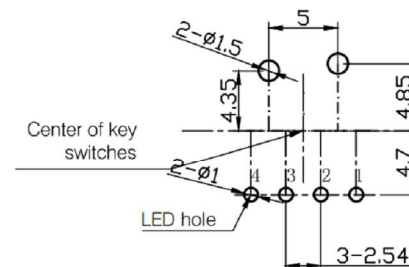

- A. 机械性能:
1. 触压力: 25 ~ 65
 2. 80%RH max.
 3. 20 ± 2)
..... 65 ± 5%)
..... (860 ~ 1060 m bars)
 4.
 5. 接点型式: 单极单投式常开型
 6. 最大额定: 10mA 12V DC
 7. 尺寸: (参见图示)
- B. 电气性能:
1. 接触电阻: 1Ω 以下(初时)
 2. 绝缘电阻: 50MΩ 以上(250V DC)
 3. 耐电压: 110V AC (50Hz 或 60Hz) 的电压驱动端子间及端子与外框间一分钟
 4. 接点之瞬间接触跳动时间: 5毫秒以下
- C. 机械性能:
1. 触压力: 60 ± 12gf
 2. 总行程: 4.0 ± 0.4mm
 3. 导通行程: 2.0 ± 0.6mm
- D. 耐久性:
1. 操作寿命: 30,000,000 次以上
 2. 焊锡温度: 260℃ 以下
 3. 焊锡浸渍时间: 5 秒以下
- E. 类型:
- CKF-CAF1-RGB: 有声有落感
- F. 重量: 约 1.85g
- G.
1.
 2.
 3.

Mounting Panel

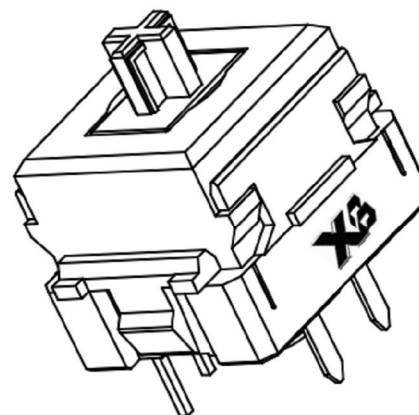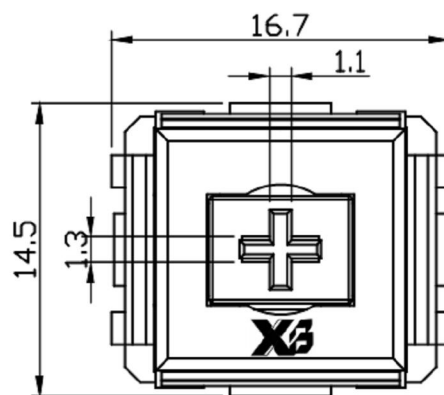

UNIT : MM
SCALE : 3 : 1
VERSION : 01

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB PUSH SWITCH

MODEL : XB-KS-06



TOLERANCE
≤ 1.5mm ± 0.1
> 1.5mm ± 0.2
> 10.0mm ± 0.3

ANGLE TOL
± 2°

NO.	PART NAME	MATERIAL	QTY	FINISHING
7	SPRING	SUS	1	NATURE
6	SPRING PLATE	SUS t=0.08mm	1	NATURE
5	TERMINAL	BRASS STRIP t=0.3mm	1	Ag PLATED
4	TERMINAL	PBS STRIP t=0.1mm	1	Ni PLATED
3	CASE	ABS	1	BLACK
2	COVER	POM	1	BLACK
1	KNOB	POM	1	WHITE/BLACK
NO.	PART NAME	MATERIAL	QTY	FINISHING