
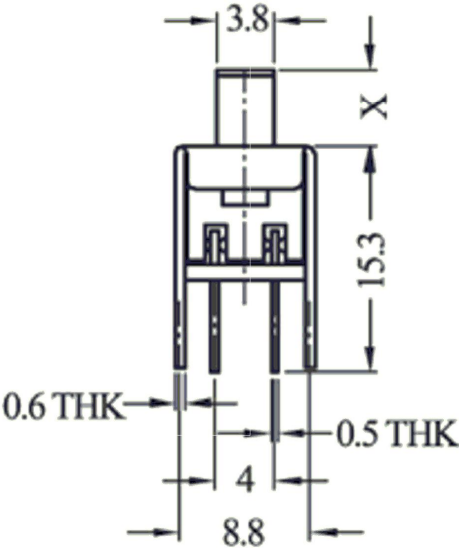


ROHS x =2-15

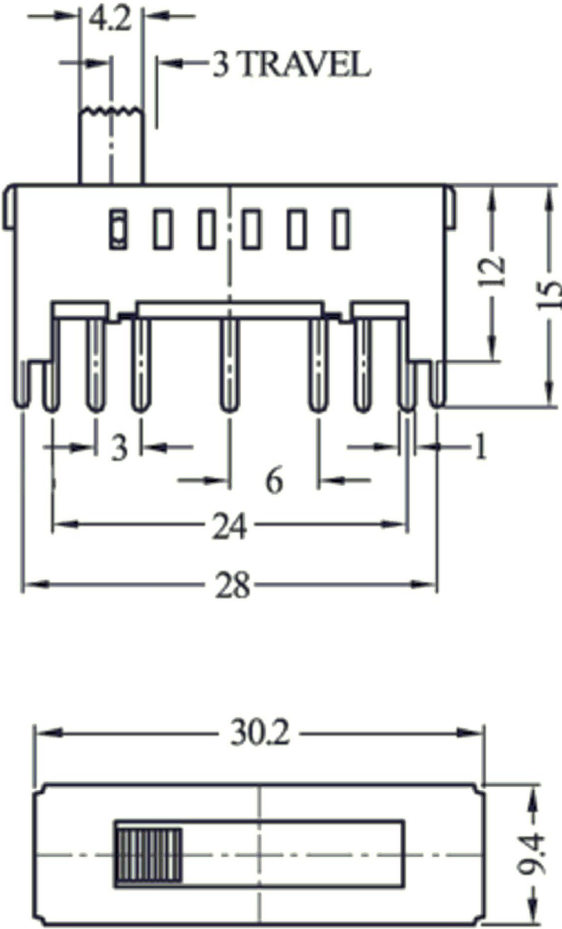

SLIDE SWITCH 2P6T


SPECIFICATION (INITIAL)

RATING:	DC 50V 0.5A
CONTACT RESISTANCE:	Not more than 30mΩ
INSULATION RESISTANCE:	500MΩ AT 500V DC
WITHSTAND VOLTAGE:	AC 500V FOR 1 MIN
OPERATION FORCE:	200 ± 100g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB SLIDE SWITCH
MODEL : XB-SS-26F02L



UNIT : MM	DWN.	DATE	2011-11-19
SCALE : 4 : 1	CHK'D	DATE	
VBRSION	01	APPD.	DATE

TOLERANCE
<=1.5mm±0.1
>1.5mm±0.2
>=10mm±0.3

ANGLE
±2°

8	SEAL PLATE	SUS	2	NATURE
7	STEEL BALL	STEEL	1	NATURE
6	SPRING	SUS	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	1	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	4	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING