

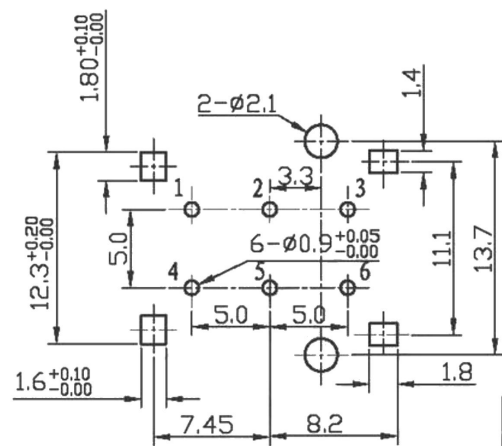
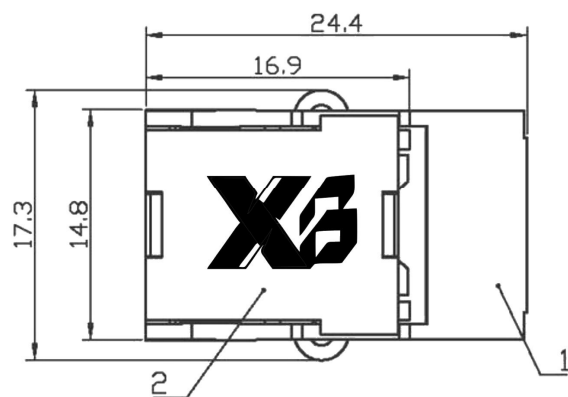



ROHS

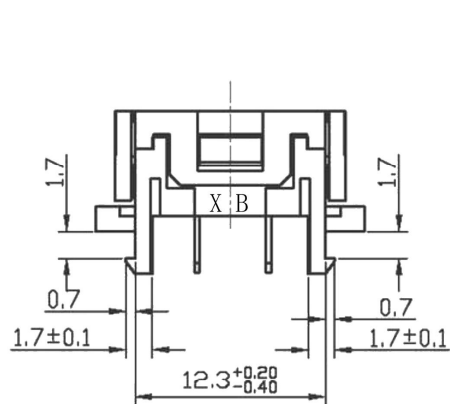

GENERAL TOLERANCES: ± 0.50
P.C.B MOUNTING

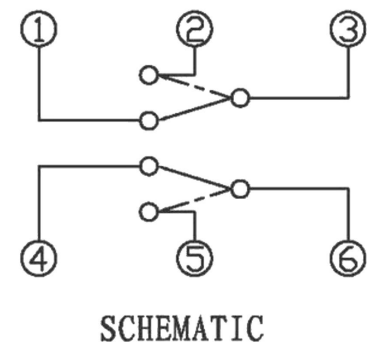


P.C.B.MOUNTING FACE

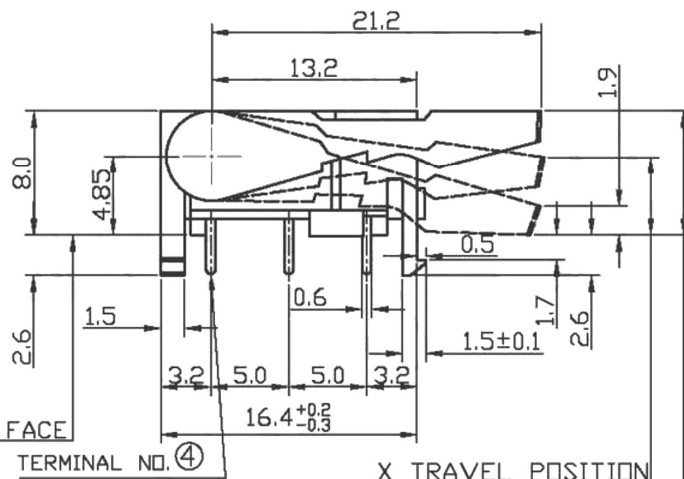

TERMINAL NO. ④

X TRAVEL POSITION

7.85 TOTAL TRAVEL POSITION



NON-SHORTING TYPE			
TIMEING LAG DIAGRAM			
① ③	ON	OFF	
② ③	OFF	ON	
④ ⑥	ON	OFF	
⑤ ⑥	OFF	ON	
6.85max. 2.65min. mm			
TRAVEL POSITION (X)			



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : HOOK SWITCH

MODEL : HS-22L15 (50 $\pm$ 10gf)



TOLERANCE
<=1.5mm ± 0.1
> 1.5mm ± 0.2
>=10mm ± 0.3

ANGLE TOL
 $\pm 2^\circ$

NO.	PART NAME	MATERIAL	QTY	FINISHING
7	SLIDER	PBT	1	BLACK
6	SPRING	SUS	1	NATURE
5	CONTACT	PBS STRIP	2	Ag CLAD
4	TERMINAL	BRASS STRIP	6	Ag PLATED
3	CASE	PBT	1	BLACK
2	COVER	POM	1	BLUE
1	KNOB	POM	1	WHITE
NO.	PART NAME	MATERIAL	QTY	FINISHING

UNIT : MM	DWN.	DATE	
SCALE : 2 : 1	CHK'D	DATE	
VERSION	01	APPD.	DATE