





2. 认证:

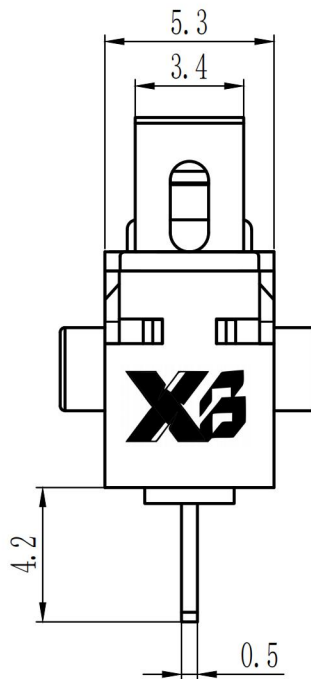


0.1A 48VDC
3A 12VDC
40T130 μ 1E5
0.1A 125/250VAC

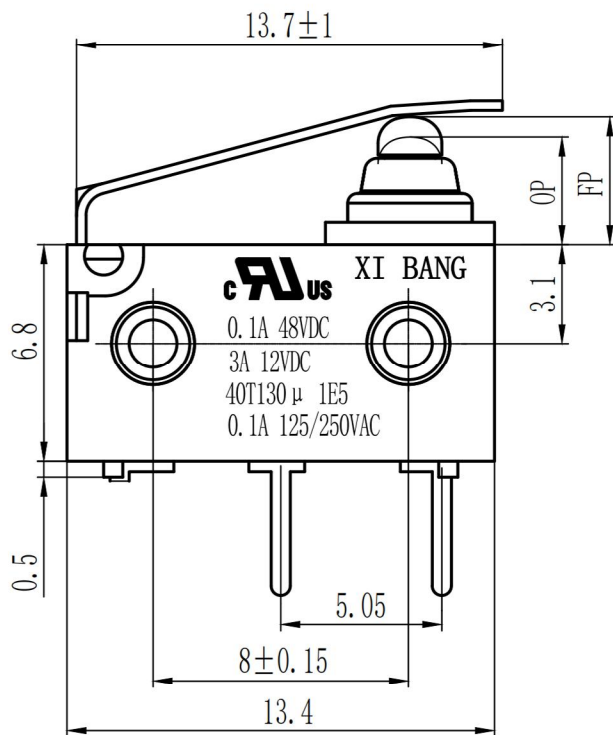

0.1A 48VDC
3A 36VDC
40T130 μ 5E4
0.1A 250VAC

3. 电路简图



SCHEMATIC

1. 技术参数


序号	主要技术参数(Main Technical Parameters)
1	电气额定值(Electrical Rating): 0.1A 125/250VAC; 3A/12VDC
2	环境温度(Ambient temperature): 40T130
3	电气寿命(Electrical lifetime): 5E4 cycles
4	动作力(Operating force): $\leq 3.0N$
5	自由位置(Free position): $4.0 \pm 0.3mm$
6	动作位置(Operating position): $3.5 \pm 0.3mm$
7	接触电阻(Contact Resistance): $\leq 100m\Omega$
8	耐压(Withstand Voltage): 端与端500V/60S/5mA, 端与壳1500V/60S/5mA。
9	绝缘电阻(Insulation Resistance): $\geq 100M\Omega$ (Test Voltage 500VDC)
10	防护等级: IP67



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : MICRO SWITCH

MODEL : XB-XB-FSK-20-D-283



TOLERANCE

± 0.2

ANGLE TOL

$\pm 2^\circ$

9	LEVER	SUS	1	
8	TERMINAL	BRASS STRIP	3	Ag PLATED
7	CONTACT	SILVER	3	
6	BASE	NYLON	1	
5	COVER	PBT	1	
4	FIXED ROD	SUS	1	
3	SPRING PLATE	SUS	1	
2	CAP	SILICA GEL	1	
1	BUTTON	NYLON	1	
NO.	PART NAME	MATERIAL	QTY.	FINISHING

UNIT : MM	DWN.		DATE	
SCALE : 2.5 : 1	CHK'D		DATE	
VERSION 01	APPD.		DATE	