

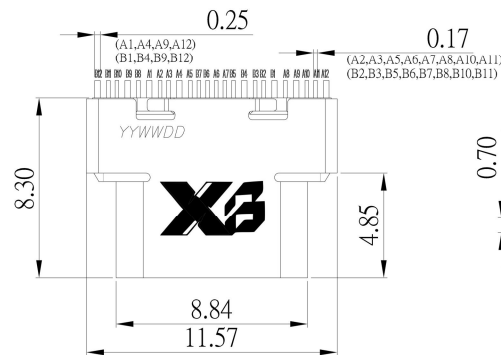

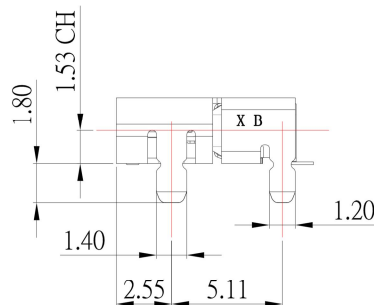


SBC-240S37-32x-S338

鍍層厚度:
Blank : 1u"
2 : 15u"
3 : 30u"

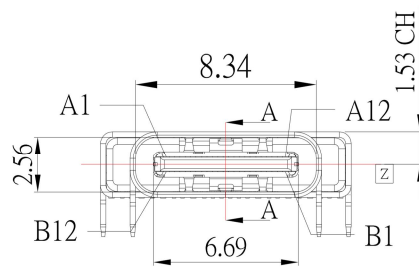

0.10
CONTACT SOLDER TAIL

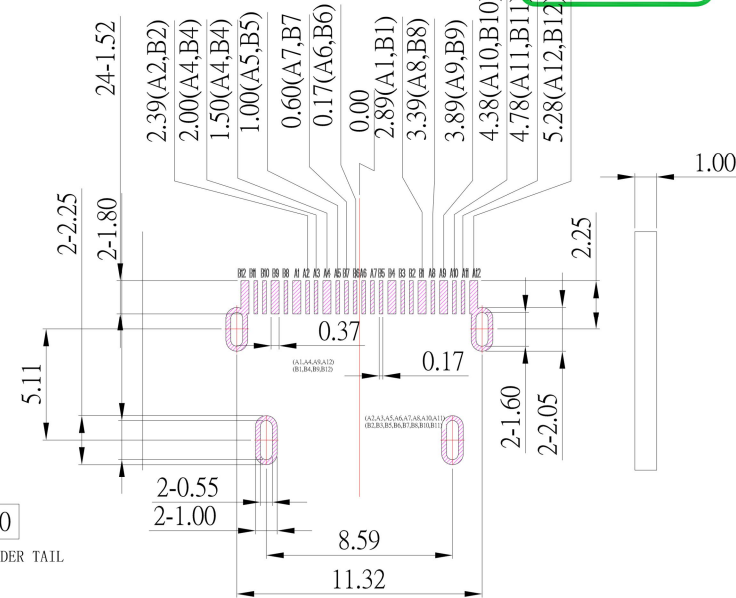

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

1. Rating: 20V , 1.25A (A1,A4,A9,A12,B1,B4,B9,B12) ;
0.25A (OTHER PIN)

2.Contact Resistance: 40 mΩ Max
3.Insulation Resistance: 100 MΩ Min
4.Dielectric Withstanding Voltage: 100V AC

Mechanical:

1.Connector Mate and Unmate Force
1.1 Mate force: 5~20 N
1.2 Unmate force: 8~20 N

Material:

1.Housing: LCP
2.Contact: C7025
3.Shell: SUS

Finish:

1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
2.Shell: Nickel under Plated surface layer

X3 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
CHECKED BY:	DATE	FINISH	MODLE	USB3.1 TYPE CF 板上單排SMT L8.3 GEN 2,10G
APPROVED BY:	DATE	SCALE	DWG NO.	SBC-240S37-32x-S338
			PART NO.	SBC-240S37-32x-S338
			SHEET NO.	1 of 1
			SIZE	A4
			VER	R

ITEM NO. DESCRIPTION DRAWN DATE