

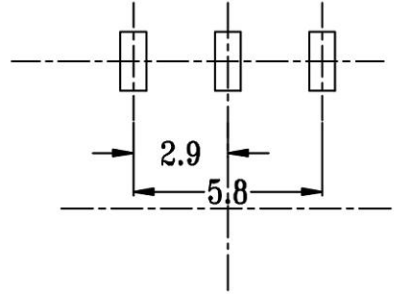
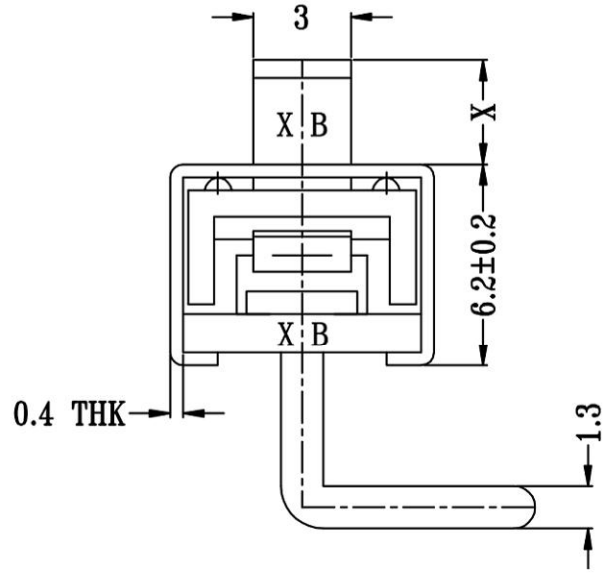


ROHS

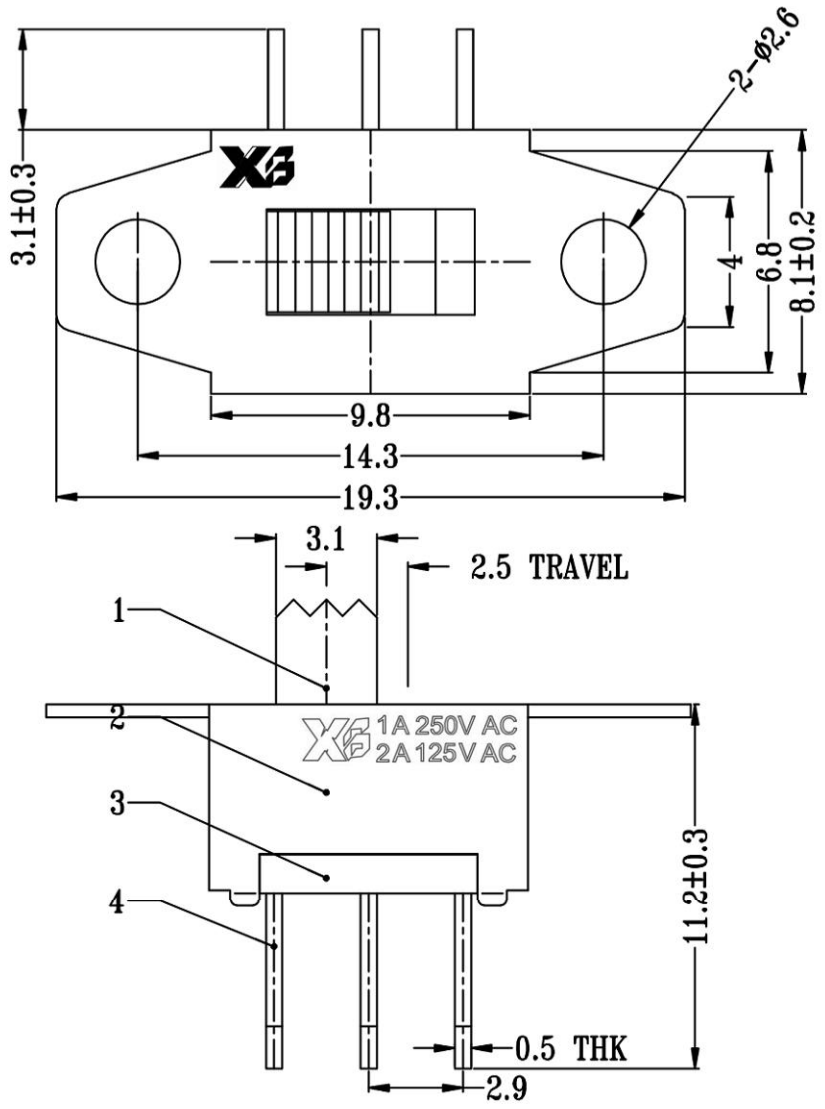

**P.C.B LAYOUT
BOTTOM VIEW**

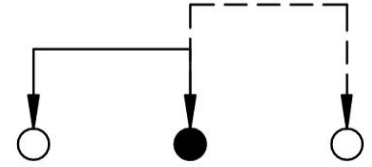

SCHEMATIC (NON-SHORTING)

SPECIFICATION (INITIAL)				
RATING:	1A	2A	125V	250 AC
CONTACT RESISTANCE:	Not more than 30mΩ			
INSULATION RESISTANCE:	500MΩ at 1500V DC			
WITHSTAND VOLTAGE:	AC	500V	for 1 min	
OPERATION FORCE:	300±100g			
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)			

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

X:2-10MM



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB SLIDE SWITCH

MODEL : XB-SS-12E88-3P-E-W 1P2T



TOLERANCE
<=1.5mm±0.1
> 1.5mm±0.2
>=10mm±0.3

ANGLE
±2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE

NO.	PART NAME	MATERIAL	QTY	FINISHING
7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK