

Ordering Information
xb-CGAC-201-B002

No. Of Pins Per Row
15/20/30/40/50/60/70/80

Standard Plating
02=Gold Flash
06=6u"AU/Gold Flash
09=3u"AU/Gold Flash

Color
1=Black

Standard Packing
H=Acetate tape+Tape&Reel


Specifications
Current Rating:0.4Amp
Insulation Resistance:100MΩMin.
Dielectric Withstanding Voltage:250VAC
Contact Resistance:80mΩMax.
Operating Temperature:-40°C to +105°C
Materials

Contact Material:copper alloy
Insulator Material:High Temperature Thermoplastic,
UL 94V-0 LCP or the equivalent material
All materials must meet GREENCONN hazardous
★ substances control standards.

★ ★: Critical Characteristics.
indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

★: Safety Features
indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Recommended P.C.Board Layout
(Tolerance:±0.05)

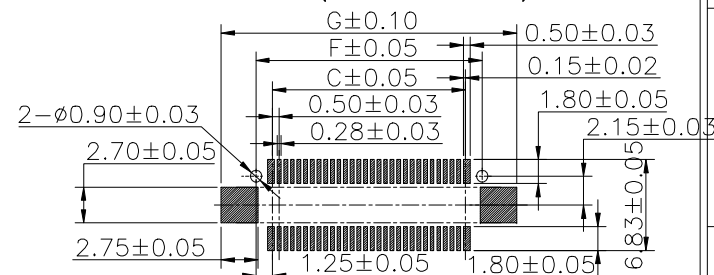

未测试	80	46.40	44.50	39.50	28.50	42.60	42.00	47.20
未测试	70	41.40	39.50	34.50	28.50	37.60	37.00	42.20
未测试	60	36.40	34.50	29.50	28.50	32.60	32.00	37.20
已测试	50	31.40	29.50	24.50	28.50	27.60	27.00	32.20
未测试	40	26.40	24.50	19.50	11.00	22.60	22.00	27.20
未测试	30	21.40	19.50	14.50	11.00	17.60	17.00	22.20
未测试	20	16.40	14.50	9.50	11.00	12.60	12.00	17.20
已测试	15	13.90	12.00	7.00	11.00	10.10	9.50	14.70
备注	No. of PIN/ROW	A	B	C	D	E	F	G



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

3RD.ANG
PROJ.

PAGE.
1 / 1

GENERAL TOLERANCE	
X:±5.0°	X.±0.35
.X°±3.0°	.X±0.30
.XX°±2.0°	.XX±0.20
.XXX°±1.0°	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

~~APPROVED:~~

DATE:

DWG. NO.	
----------	--

xb-CGAC-201-B002

PART NO.

xb-CGAC-201-B002

TITLE.	
--------	--

0.5mm PITCH BTB
FLOATING CONNECTOR