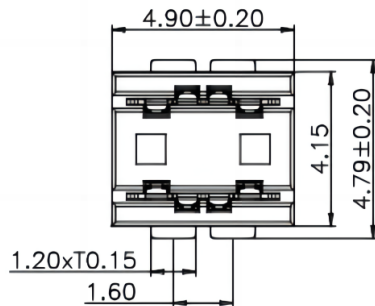



Specifications
 Current Rating:5.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:250VAC
 Contact Resistance:50mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature
 Thermoplastic, UL 94V-0 LCP or the
 equivalent material

★All materials must meet GREENCONN
 hazardous substances control standards.
 ★: Critical Characteristics.

indicates product characteristics, functionalities,
 and manufacturing processes regarding to
 customer's specifications

★: Safety Features
 indicates product characteristics, functionalities,
 and manufacturing processes complying to legal
 regulations stated by local government

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

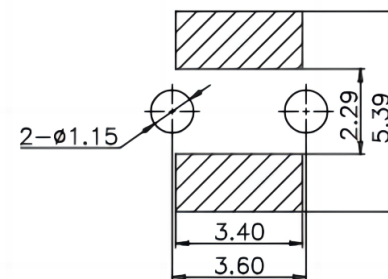

Ordering Information

C ZC205 - 01 02 B 001 C 1 S H

No. Of Pins Per Row 01
 Standard Plating 02=Gold fash
 Color 1=Black
 Standard Packing H=Acetate tape+Tape&Reel

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONIC CO., LTD.

3RD.ANG
 PROJ.

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

XB-CZZC-205

PART NO.

XB-CZZC-205

TITLE.

2.54mm PITCH BTB
 FLOATING CONNECTOR

REV. A UNIT. mm SCALE. 3:1 PAGE. 1/1