


Specifications

Current Rating : 1.0 Ampere
Insulation Resistance : 1000 MΩ Min
Dielectric Withstanding : 300V AC
Contact Resistance : 20 mΩ Max
Operating Temperature : -40°C to +105°C


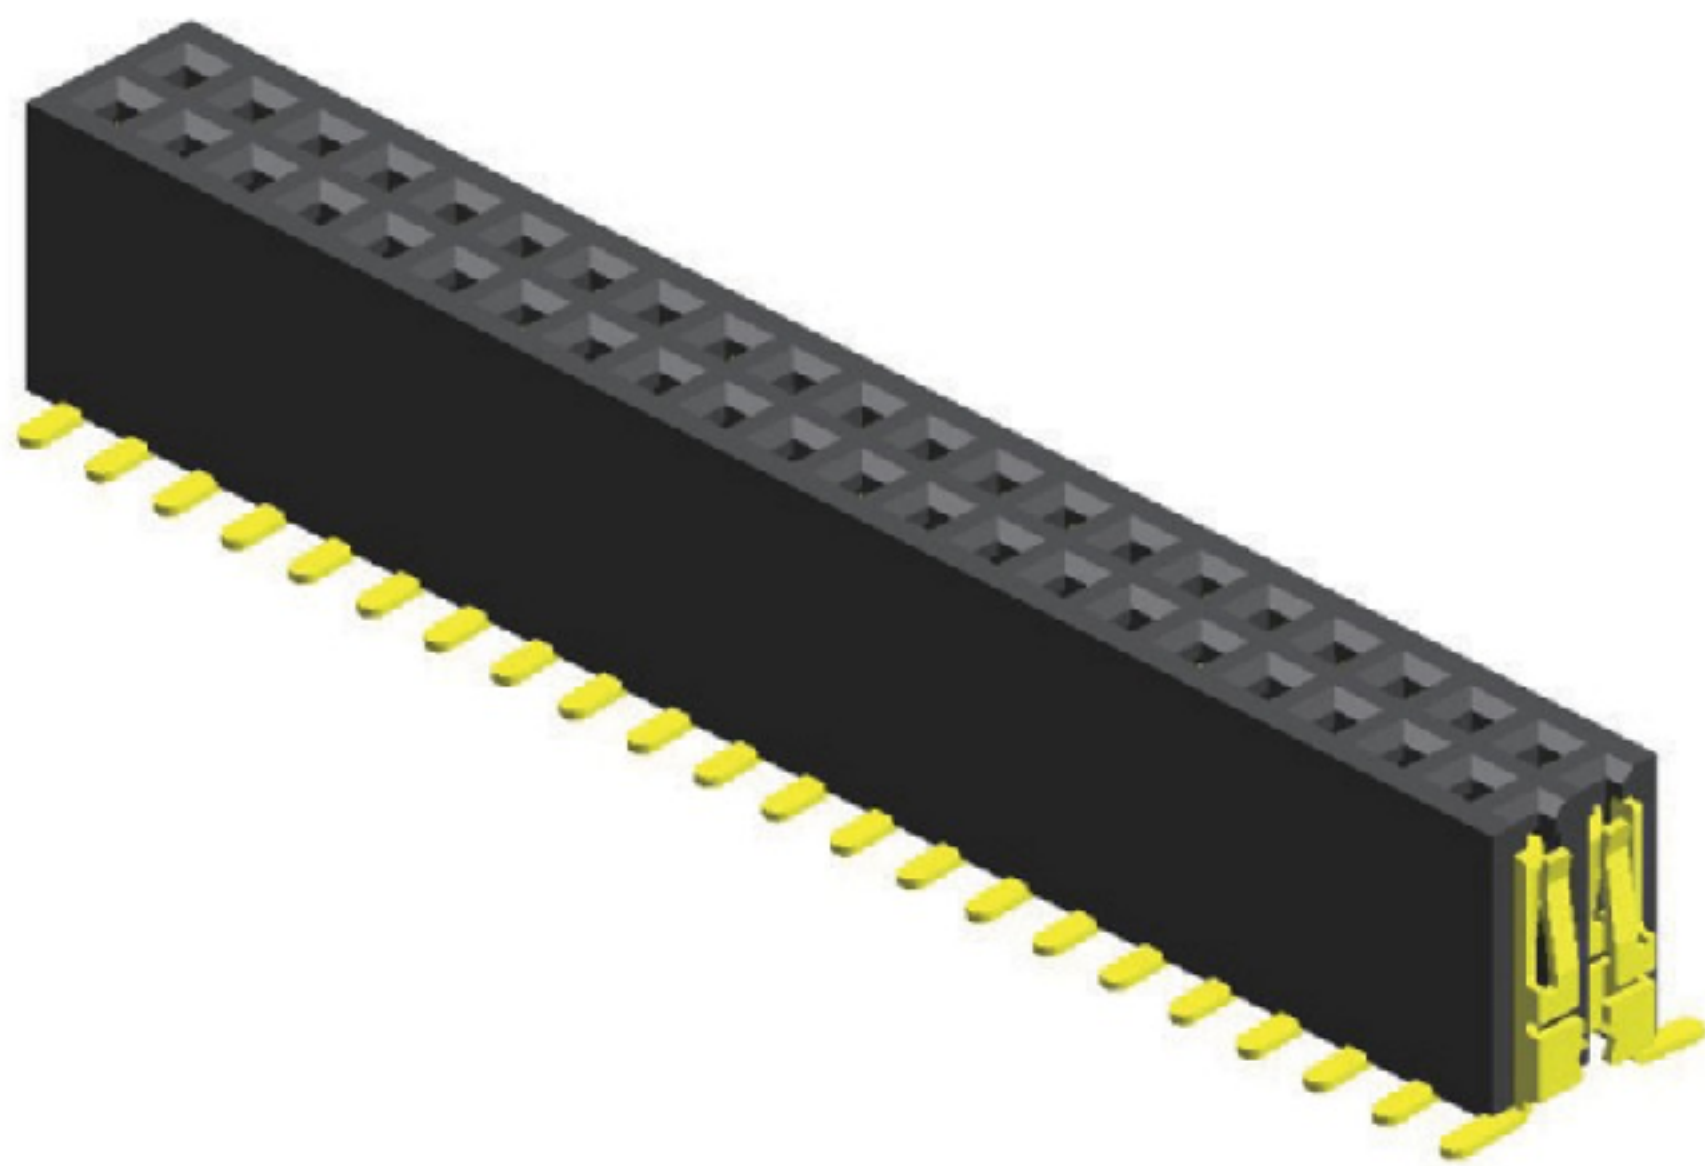


Materials

Contact Material : Phosphor Bronze
Insulation Material : High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

Mating with

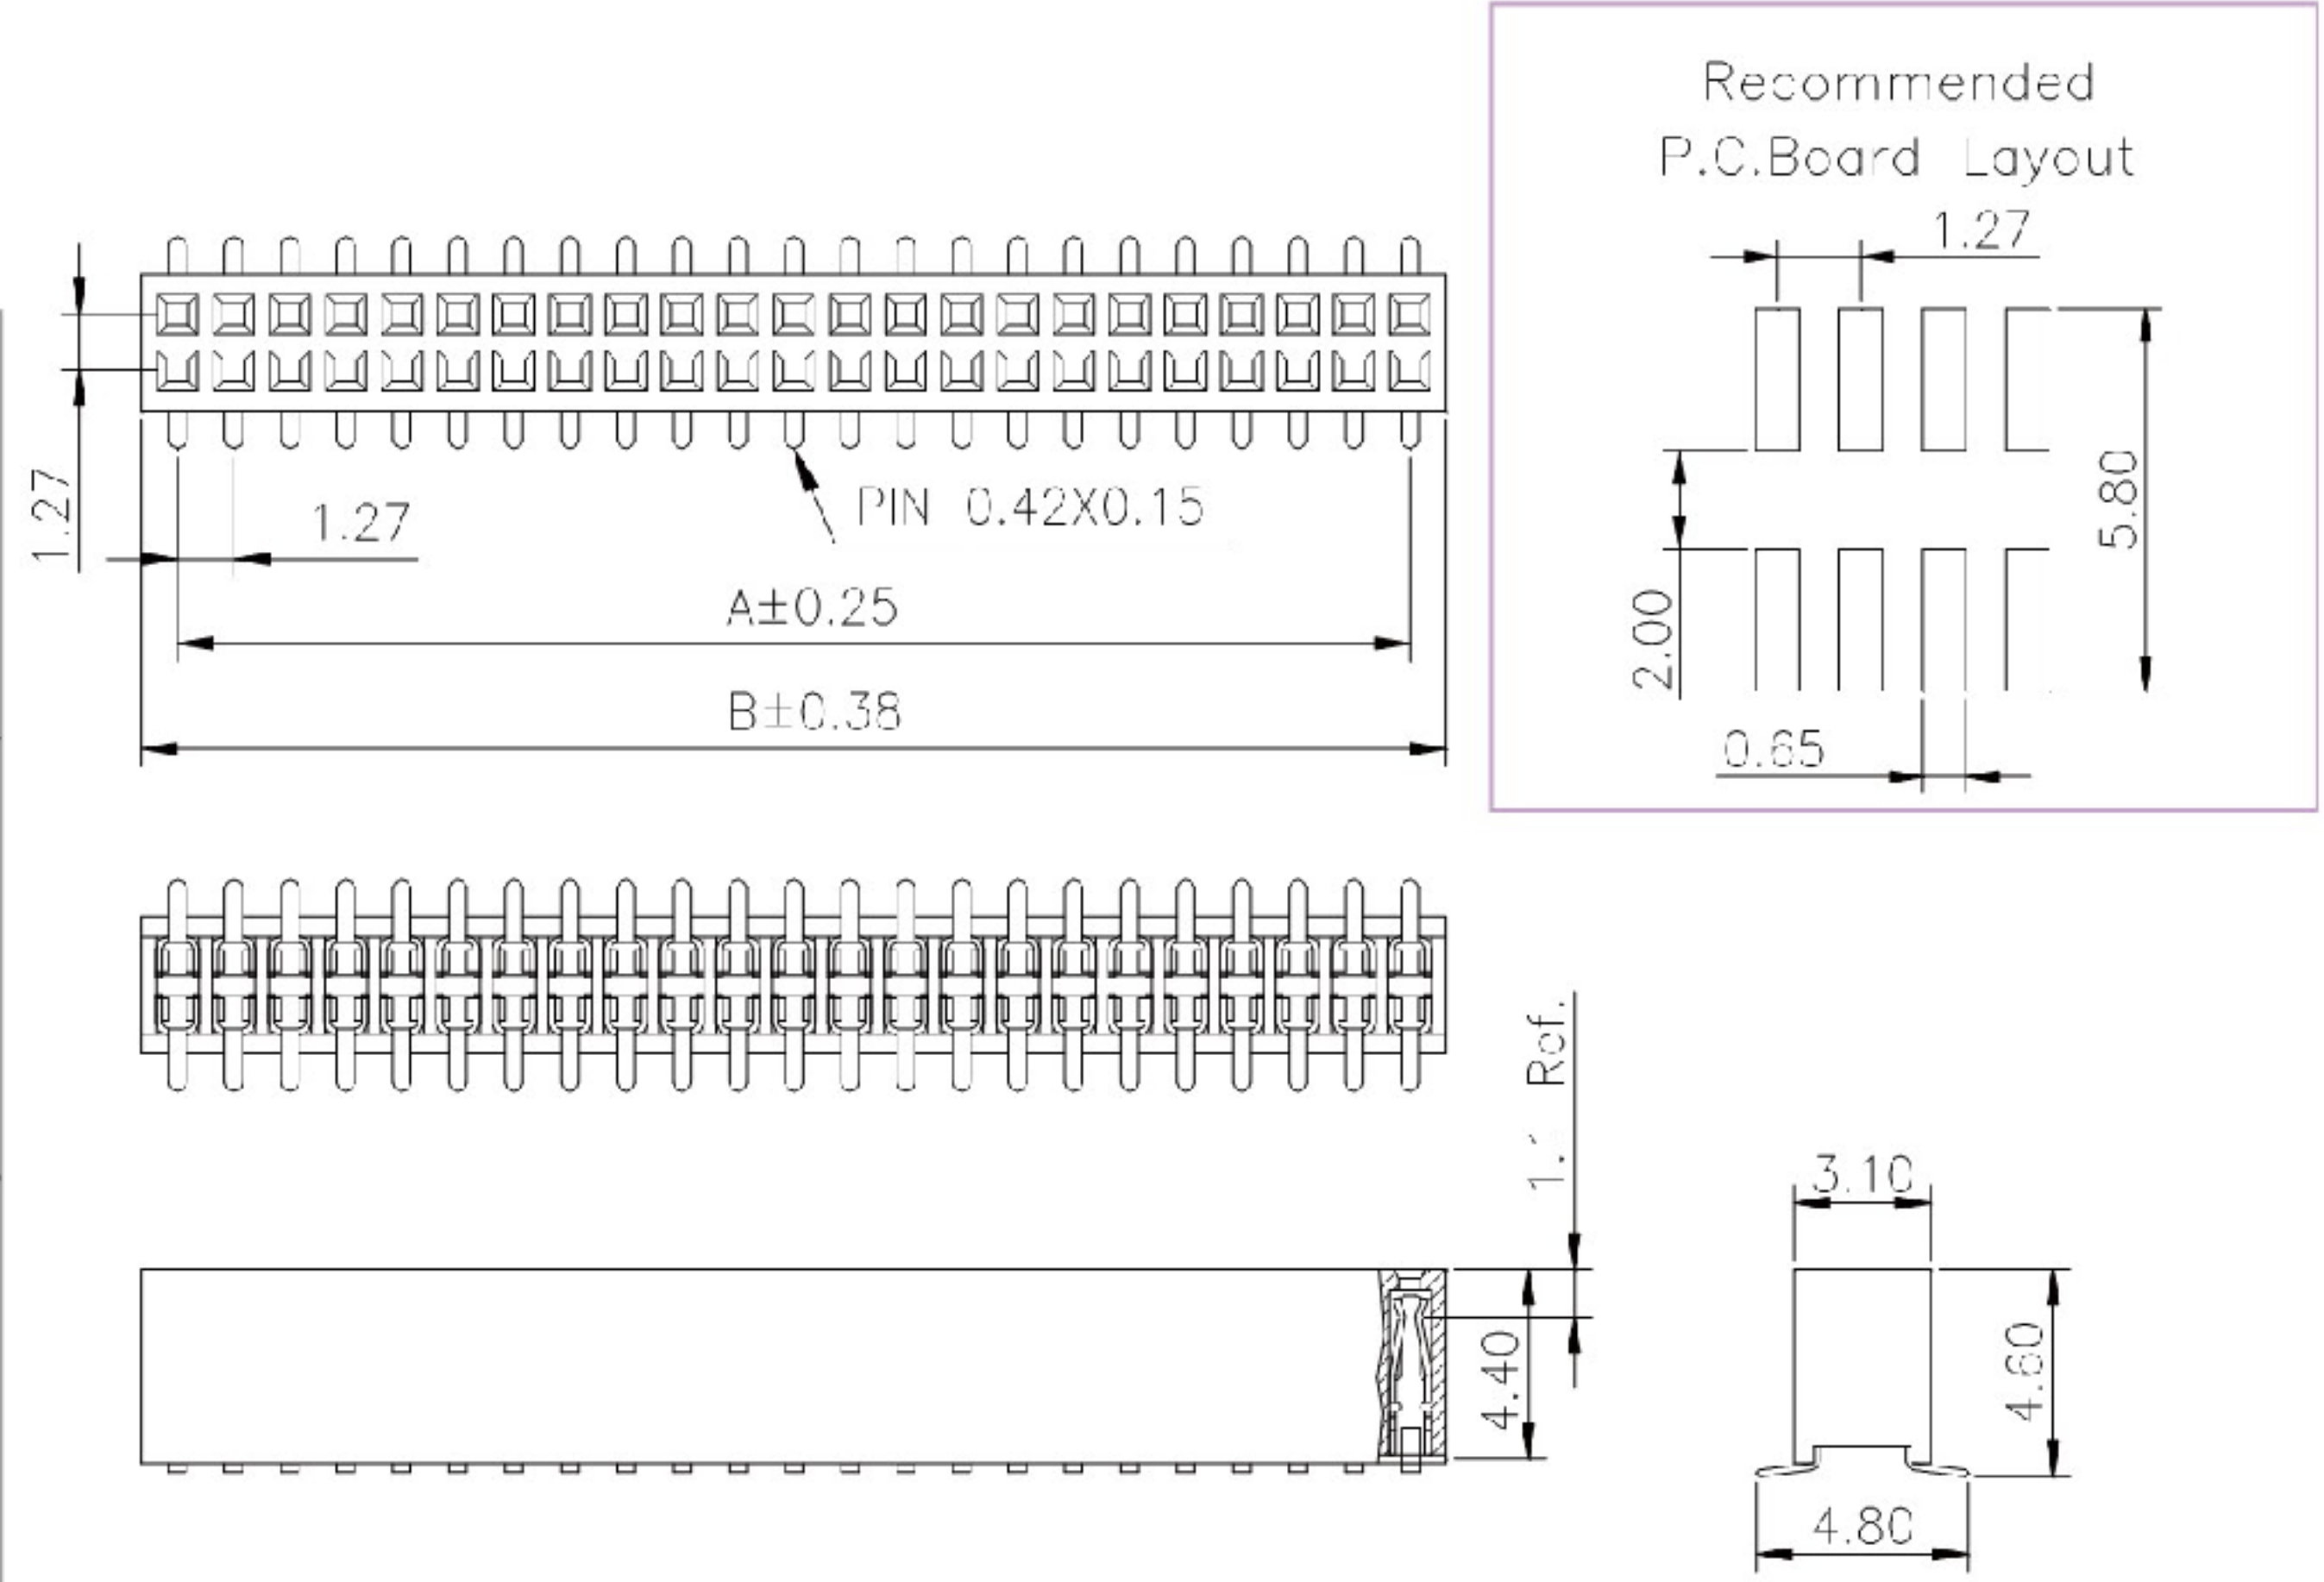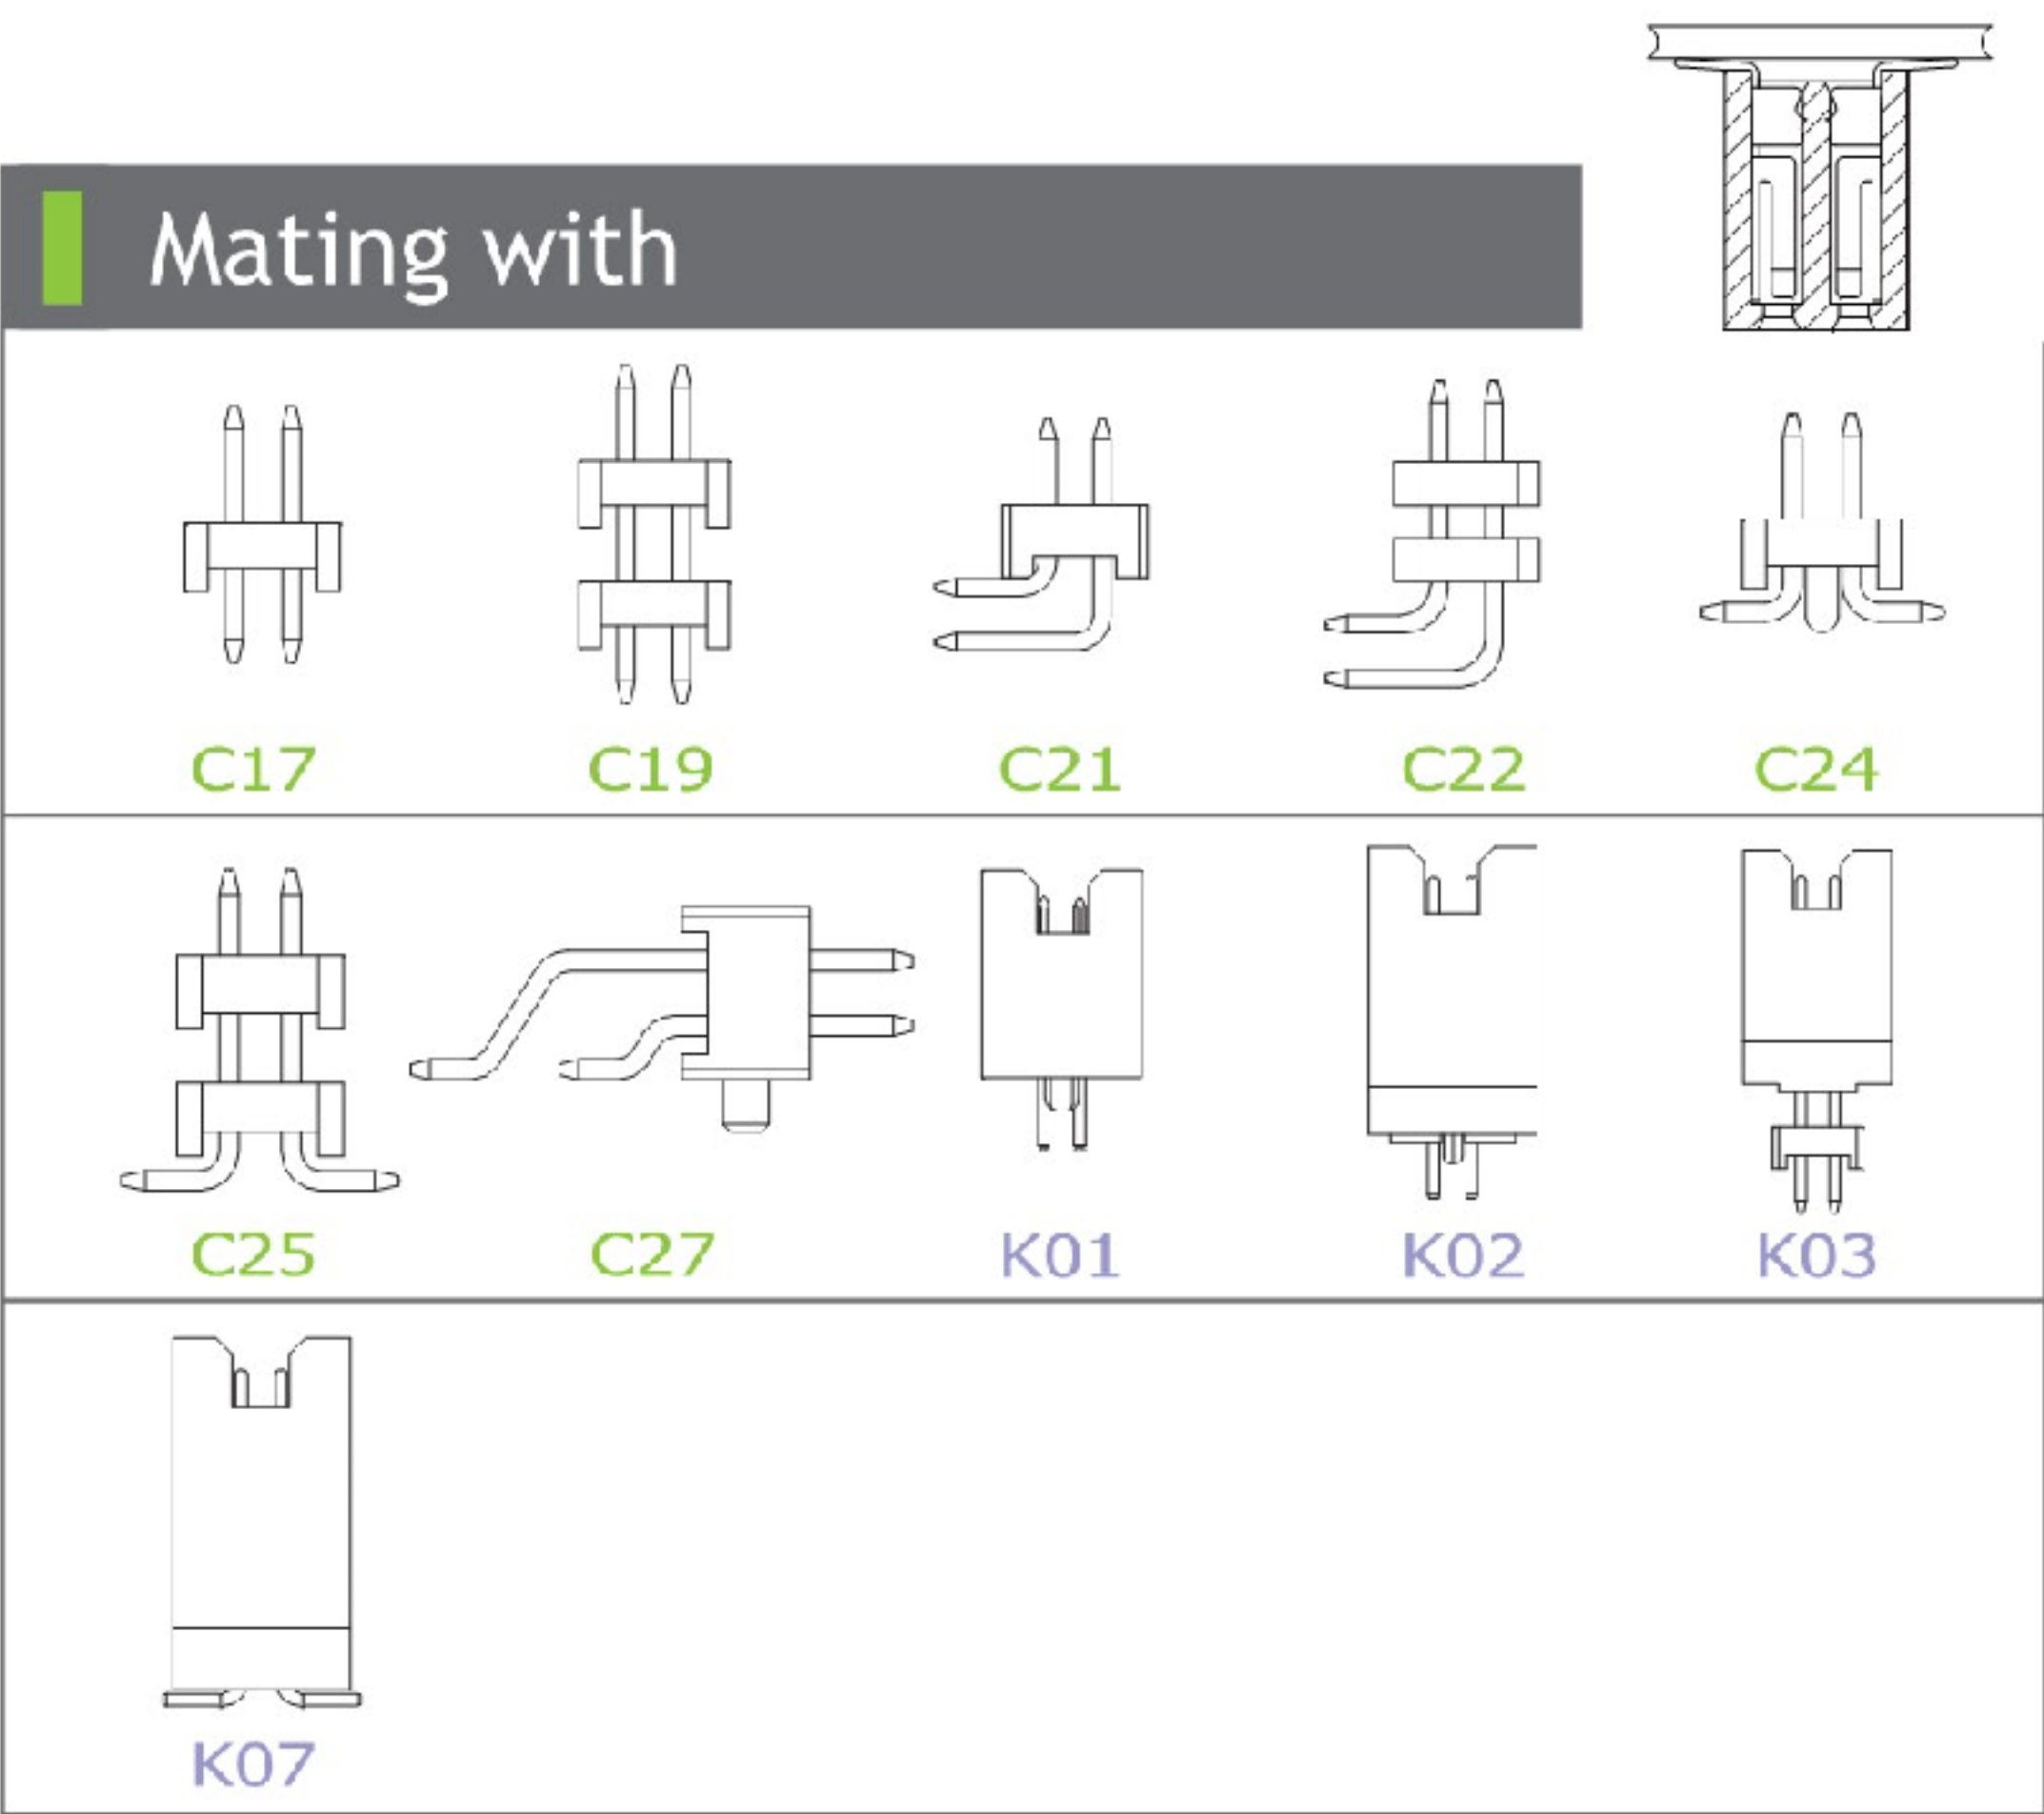

P.S. : Suggested mating pin length : 2.0 ~ 4.2 mm * For Coded Dimension Not Inside The Table, Please Refer To"Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
02	1.27	2.89		14	16.51	18.13		27	33.02	34.64		40	49.53	51.15	
03	2.54	4.16		15	17.78	19.40		28	34.29	35.91		41	50.80	52.42	
04	3.81	5.43		16	19.05	20.67		29	35.56	37.18		42	52.07	53.69	
05	5.08	6.70		17	20.32	21.94		30	36.83	38.45		43	53.34	54.96	
06	6.35	7.97		18	21.59	23.21		31	38.10	39.72		44	54.61	56.23	
07	7.62	9.24		19	22.86	24.48		32	39.37	40.99		45	55.88	57.50	
08	8.89	10.51		20	24.13	25.75		33	40.64	42.26		46	57.15	58.77	
09	10.16	11.78		21	25.40	27.02		34	41.91	43.53		47	57.42	60.04	
10	11.43	13.05		22	26.67	28.29		35	43.18	44.80		48	59.69	61.31	
11	12.70	14.32		23	27.94	29.56		36	44.45	46.07		49	60.96	62.58	
12	13.97	15.59		24	29.21	30.83		37	45.72	47.34		50	62.23	63.85	
13	15.24	16.86		25	30.48	32.10		38	46.99	48.61					
				26	31.75	33.37		39	48.26	49.88					



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1

GENERAL TOLERANCE	
X'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	TITLE.
XB-PM-C-127-202	2.00 FEMALE HEADER SINGLE ROW DIP TYPE BASE 4.30H
PART NO.	
XB-PM-C-127-202	