

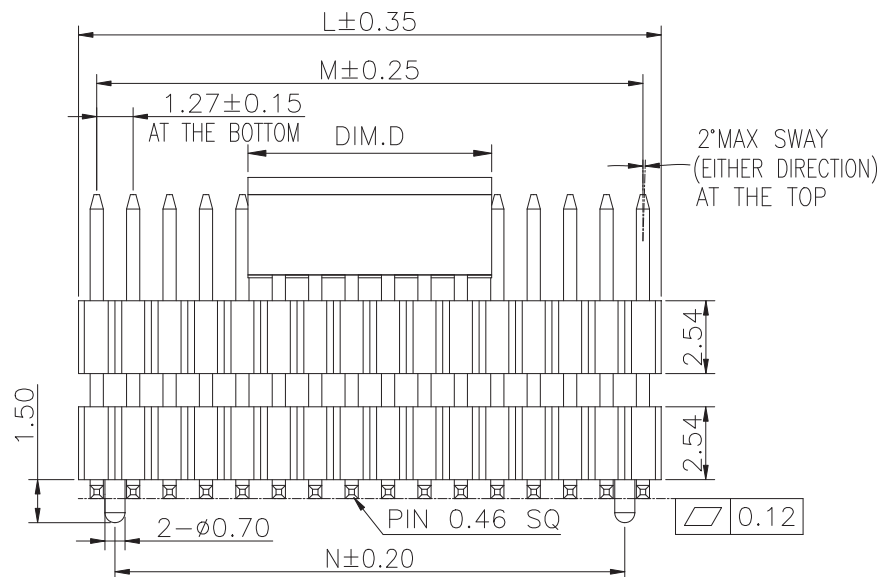
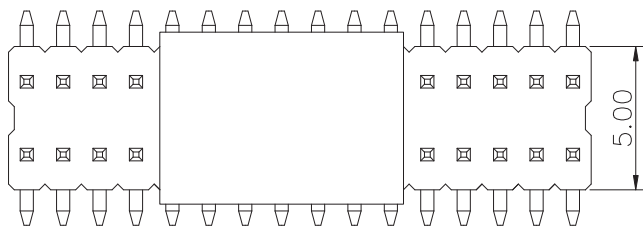


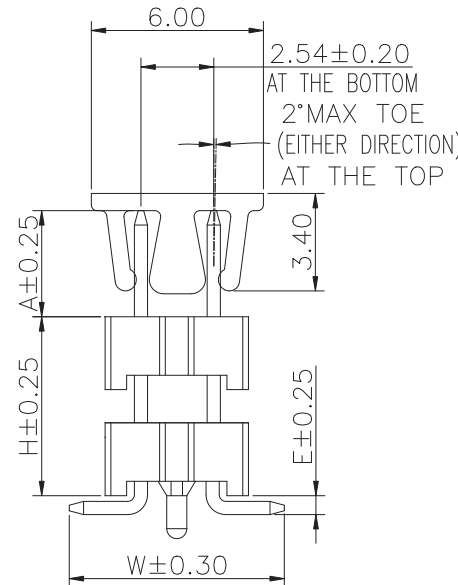

Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet Greenconn hazardous substances control standards.

Recommended P.C.Board Layout
(Tolerance:±0.05)

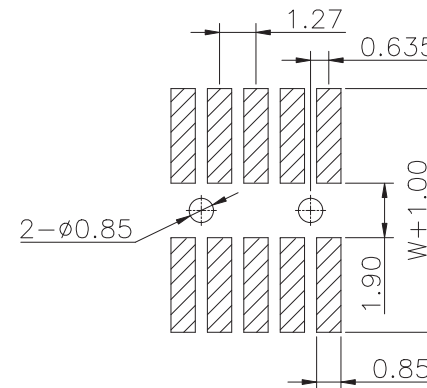

Ordering Information

XB-PZ-C-127-260

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code
No. of Pins per Row
02~50

Positioning column information
A=No locating post
B=Round post
C=Square post

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

Pin length
See the drawing

Insulator Material
R=Nylon(Halogen Free)
C=LCP

Color
1=Black
2=White
3=Yellow
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze
B/Z/H/W=Brass

Packing code
A=Box
B=Tray
C=Tube
D=Tape&Reel
E=Cap+Tube
F=Cap+Tape&Reel
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

Dim.D	NOTE
5.00mm	03~08PIN
8.50mm	09~50PIN

No. of PIN/ROW	Dimension Information			No. of PIN/ROW	Dimension Information		
	L	M	N		L	M	N
02	2.54	1.27		27	34.29	33.02	31.75
03	3.81	2.54	1.27	28	35.56	34.29	33.02
04	5.08	3.81	2.54	29	36.83	35.56	34.29
05	6.35	5.08	3.81	30	38.10	36.83	35.56
06	7.62	6.35	5.08	31	39.37	38.10	36.83
07	8.89	7.62	6.35	32	40.64	39.37	38.10
08	10.16	8.89	7.62	33	41.91	40.64	39.37
09	11.43	10.16	8.89	34	43.18	41.91	40.64
10	12.70	11.43	10.16	35	44.45	43.18	41.91
11	13.97	12.70	11.43	36	45.72	44.45	43.18
12	15.24	13.97	12.70	37	46.99	45.72	44.45
13	16.51	15.24	13.97	38	48.26	46.99	45.72
14	17.78	16.51	15.24	39	49.53	48.26	46.99
15	19.05	17.78	16.51	40	50.80	49.53	48.26
16	20.32	19.05	17.78	41	52.07	50.80	49.53
17	21.59	20.32	19.05	42	53.34	52.07	50.80
18	22.86	21.59	20.32	43	54.61	53.34	52.07
19	24.13	22.86	21.59	44	55.88	54.61	53.34
20	25.40	24.13	22.86	45	57.15	55.88	54.61
21	26.67	25.40	24.13	46	58.42	57.15	55.88
22	27.94	26.67	25.40	47	59.69	58.42	57.15
23	29.21	27.94	26.67	48	60.96	59.69	58.42
24	30.48	29.21	27.94	49	62.23	60.96	59.69
25	31.75	30.48	29.21	50	63.50	62.23	60.96
26	33.02	31.75	30.48				

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01 UNIT. mm SCALE. 4:1 PAGE. 1/1

GENERAL TOLERANCE

X°±5.0°	X.±0.30
.X°±3.0°	.X±0.25
.XX°±2.0°	.XX±0.15
.XXX°±1.0°	.XXX±0.10

DWG. NO.

XB-PZ-C-127-260

PART NO.


XB-PZ-C-127-260

TITLE.

**1.27 PIN HEADER
DUAL ROWS SMT TYPE
CONNECTOR**

Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C




Materials

Contact Material : Brass
Insulation Material : High Temperature Thermoplastic



All materials must meet Greenconn's requirements for environmental protection.

Mating with



C33 C36

C36

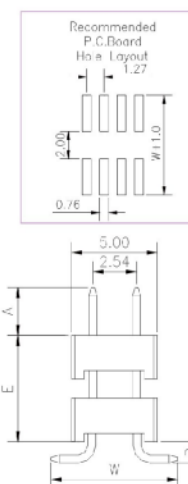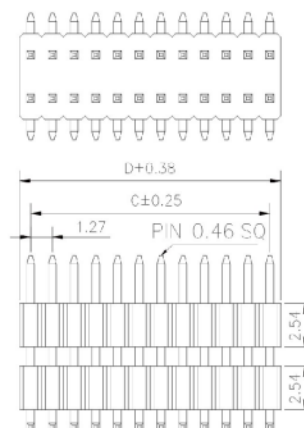

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
				11	12.70	13.97		21	25.40	26.67		31	38.10	39.37	
02	1.27	2.54		12	13.97	15.24		22	26.67	27.94		32	39.37	40.64	
03	2.54	3.81		13	15.24	16.51		23	27.94	29.21		33	40.64	41.91	
04	3.81	5.08		14	16.51	17.78		24	29.21	30.48		34	41.91	43.18	
05	5.08	6.35		15	17.78	19.05		25	30.48	31.75		35	43.18	44.45	
06	6.35	7.62		16	19.05	20.32		26	31.75	33.02		36	44.45	45.72	
07	7.62	8.89		17	20.32	21.59		27	33.02	34.29		37	45.72	46.99	
08	8.89	10.16		18	21.59	22.86		28	34.29	35.56		38	46.99	48.26	
09	10.16	11.43		19	22.86	24.13		29	35.56	36.83		39	48.26	49.53	
10	11.43	12.70		20	24.13	25.40		30	36.83	38.10		40	49.53	50.80	



 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE

$X \pm 5.0$	$X \pm 0.30$
-------------	--------------

$X \pm 3.0'$	$X \pm 0.25$
--------------	--------------

$XX \pm 2.0'$	$XX \pm 0.15$
---------------	---------------

$XXYX' + 1.0$	$XXYX + 0.10$
---------------	---------------

DESIGN

CLASSIFIED

CHECKED: _____

~~APPROVED~~

1

DATE:

DATE	
BY	

DATE: _____

DATE: _____

DATE:	

DWG. NO.

XB-PZ-C-127-260

PART NO.	
----------	--

XB-PZ-C-127-260

[illegible]

TITLE.

2.00 FEMALE HEADER
SINGLE ROW DIP TYPE
BASE 4.30H
