

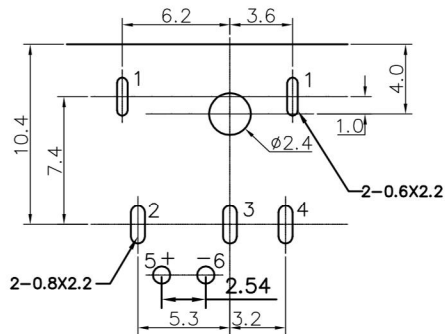


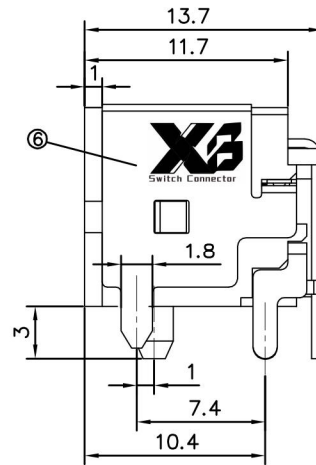
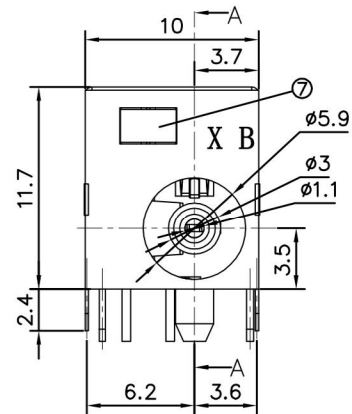


SEC A-A

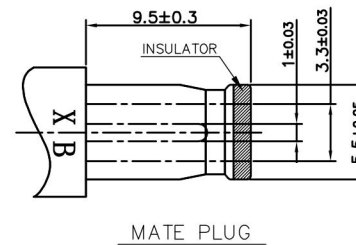

PCB HOLES(TOP VIEW)t=1.6mm
NOTE: GENERAL TOLERANCE: $\pm 0.1\text{mm}$

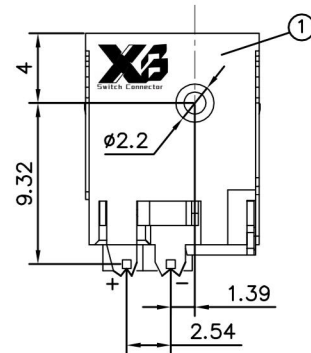

SPECIFICATION

- 1.Rating : DC 12V 30V , 3.0A 5.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles


7	LED		1		GREEN
6	SHIELD		1	BRASS t=0.2	Sn-plated
5	CARTM TERMINAL	1	1	PHOSPHOR BRONZE t=0.2	Sn-plated
4	CENTER TERMINAL	4	1	PHOSPHOR BRONZE t=0.4	Sn-plated
3	FIX TERMINAL	3	1	BRASS t=0.4	Sn-plated
2	SPRING TERMINAL	2	1	PHOSPHOR BRONZE t=0.3	Sn-plated
1	HOING		1	PA66 94V-0	BLACK
NO.	PART NAME	TER.NO.	QTY	MATERIAL	REMARK



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB DC Power Jack

MODEL : XB-DC-0084D



TOLERANCE

$\leq 1.5\text{mm}$	± 0.1
$> 1.5\text{mm}$	± 0.2
$\geq 10.0\text{mm}$	± 0.3

ANGLE TOL
 $\pm 2^\circ$

6	PIN	BRASS	1	Ni PLATED
5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED
4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED
3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED
2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED
1	HOUSING	PBT UL94-V0	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING