

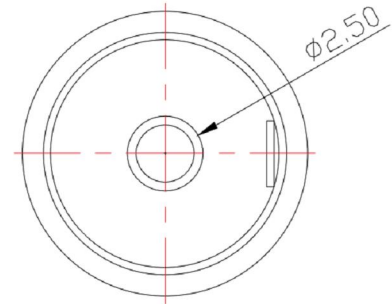
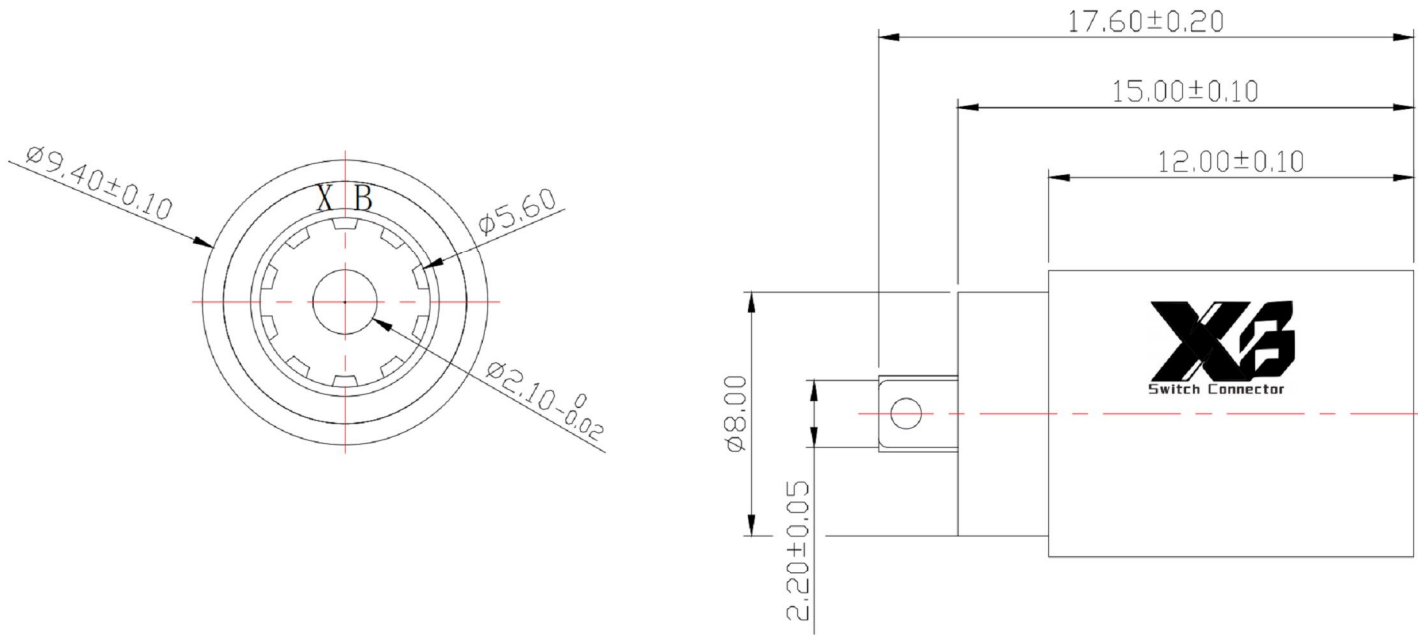


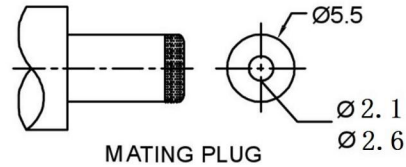

SPECIFICATION

1. Rating : DC 12V 30V, 30A 50A
2. Contact resistance : $\leq 30m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

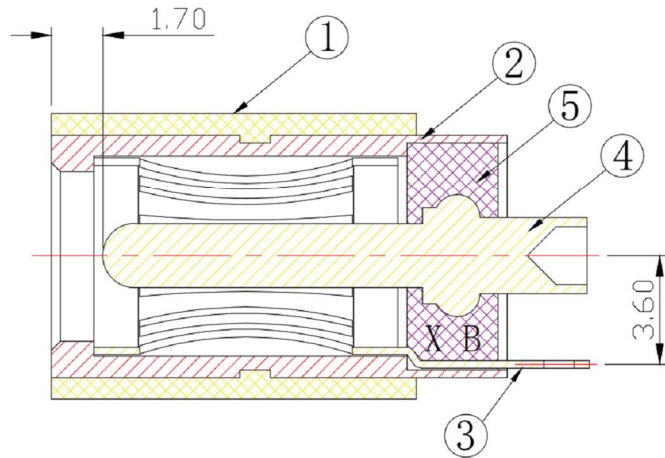

SCHEMATIC	
CENTER PIN	$\phi 2.0mm$
	$\phi 2.5mm$

5	底座	XB-DC-022AL-05	PPA		1	黑
4	圆针	XB-DC-022AL-04	黄铜棒 H62	铜锡	1	
3	接触片	XB-DC-022AL-03	磷铜 C5191 T=0.25	铜锡	1	
2	铜套	XB-DC-022AL-02	黄铜棒 H62	铜锡	1	
1	基座	XB-DC-022AL-01	PA66		1	黑
序号	零件名称	编号	材料	电镀	数量	备注

		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD											
		TITLE : XB DC Power Jack											
		MODEL : XB-DC-022AL DC插座外径9.4X15 内径5.6											
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 ≥10.0mm ± 0.3	ANGLE TOL ± 2°	6	PIN	BRASS	1	Ni PLATED	
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE				5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED	
VERSION		01	APPD.	FEI. LONG. HE	DATE				4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED
									3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED
								2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED	
								1	HOUSING	PBT UL94-V0	1	BLACK	
								NO.	PART NAME	MATERIAL	QTY.	FINISHING	