

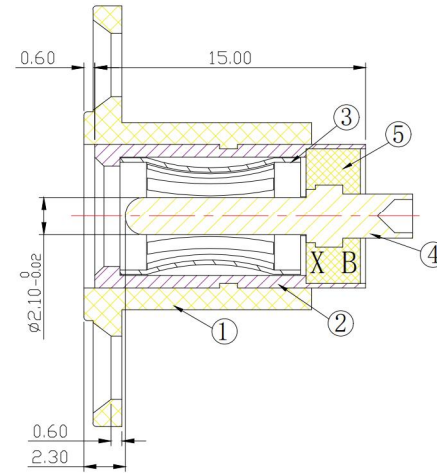
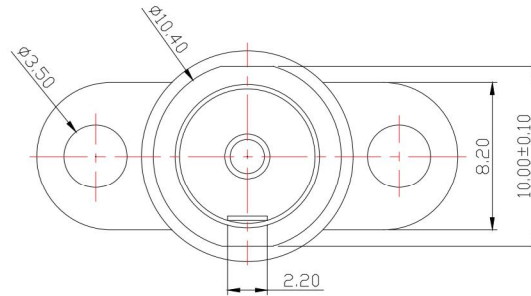
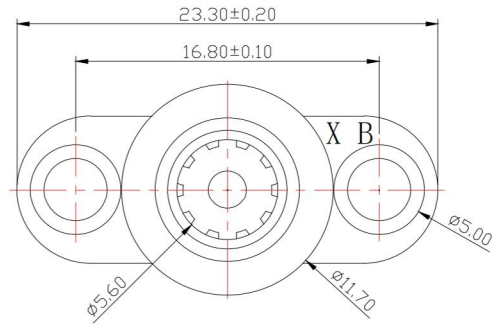
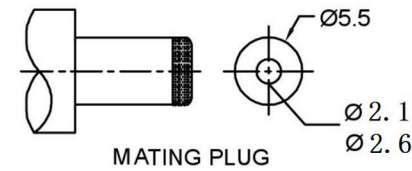


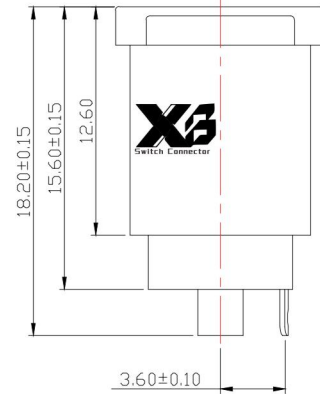

SPECIFICATION

- Rating : DC 12V 30V, 30A 50A
- Contact resistance : $\leq 30\text{m}\Omega$
- Insulation resistance : $\geq 100\text{M}\Omega$
- Withstand voltage : 500VAC
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles

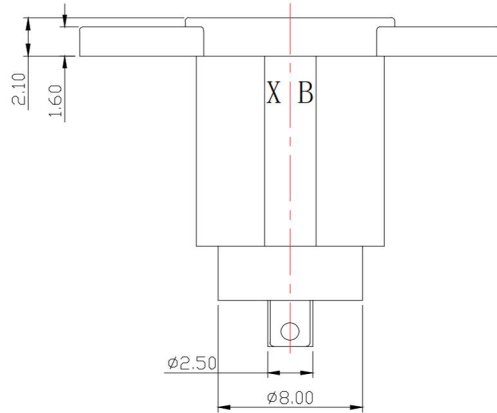

SCHEMATIC	
CENTER PIN	$\phi 2.0\text{mm}$ $\phi 2.5\text{mm}$


5	底座	XB-DC-022FX-05	PPA		1	黑
4	圆针	XB-DC-022FX-04	黄铜棒 H62	铜 锡	1	
3	弹片	XB-DC-022FX-03	磷铜 C5191 T=0.25	铜 锡	1	
2	铜套	XB-DC-022FX-02	黄铜棒 H62	铜 锡	1	
1	基座	XB-DC-022FX-01	PA66		1	黑
序号	零件名称	编 号	材 料	电 镀	数量	备 注



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB DC Power Jack

MODEL : XB-DC-022FX DC插座立式带耳朵 内径5.6



TOLERANCE
 $\leq 1.5\text{mm} \pm 0.1$
 $> 1.5\text{mm} \pm 0.2$
 $\geq 10.0\text{mm} \pm 0.3$

ANGLE TOL
 $\pm 2^\circ$

6	PIN	BRASS	1	Ni PLATED
5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED
4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED
3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED
2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED
1	HOUSING	PBT UL94-V0	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	DONG. PANG	DATE	
VERSION	01	APPD.	FET. LONG. HE	DATE