




SPECIFICATION

- 1.Rating : DC 12V 30V , 30A 50A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles



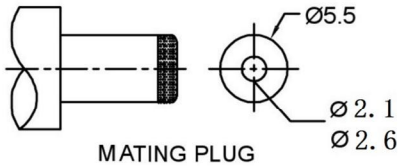


SCHEMATIC	
CENTER PIN	Ø2.0mm Ø2.5mm

5	外壳	XB-DC-084KS-05	PA66		1	黑
4	圆针	XB-DC-084KS-04	黄铜棒 H62	铜 锡	1	Ø2.0
3	弹片	XB-DC-084KS-03	磷铜 C5191 T=0.25	铜 锡	1	
2	铜套	XB-DC-084KS-02	黄铜棒 H59 C3604	铜 锡	1	
1	底座	XB-DC-084KS-01	PPA		1	黑
序号	零件名称	编 号	材 料	电 镀	数量	备 注

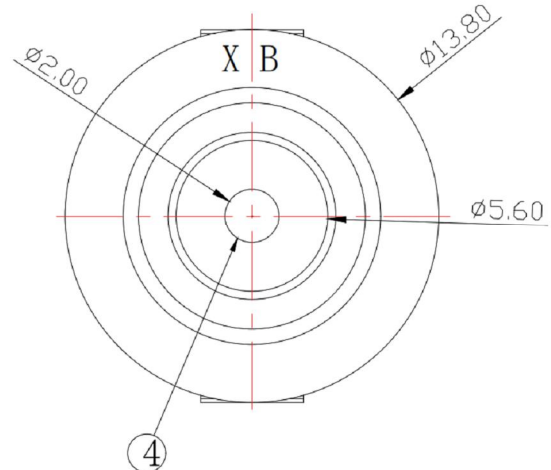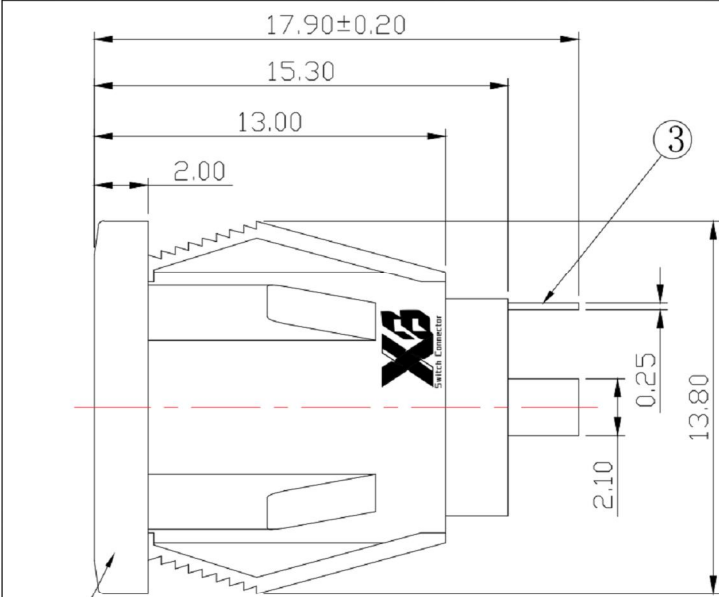

安装板开孔图

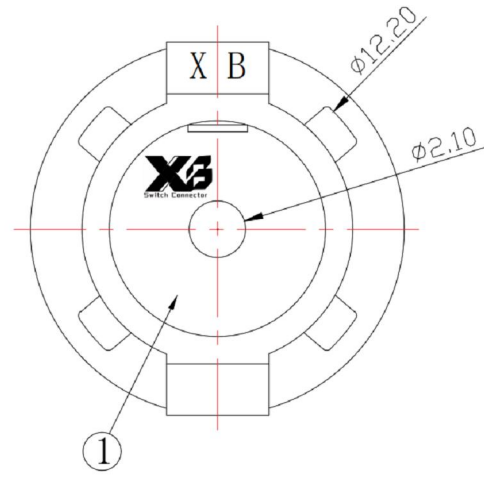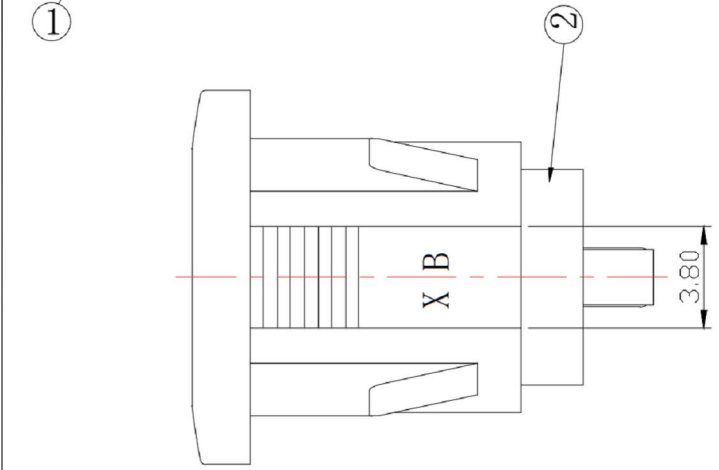

		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD				 						
TITLE : XB DC Power Jack		MODEL : XB-DC-084KS 卡扣安装DC母座5525/卡扣DC插座5521				6 PIN	BRASS	1	Ni PLATED			
		5 TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED							
		4 SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED							
		3 TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED							
		2 TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED							
		1 HOUSING	PBT UL94-V0	1	BLACK							
UNIT : MM		DWN.	ZENQ. CHEN	DATE	TOLERANCE <=1.5mm ± 0.1 > 1.5mm ± 0.2 >=10.0mm ± 0.3	ANGLE TOL ± 2°	NO.	PART NAME	MATERIAL	QTY.	FINISHING	
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE								
VERSION	01	APPD.	FEI. LONG. HE	DATE								