

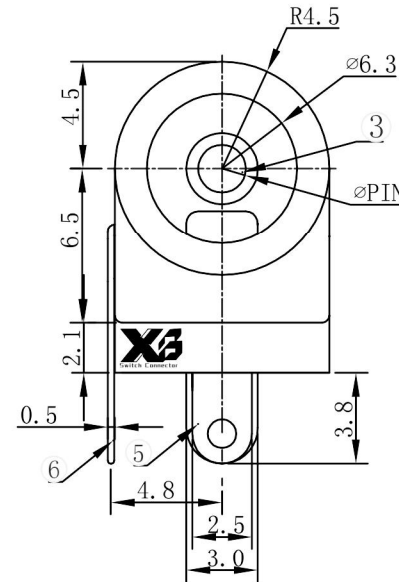
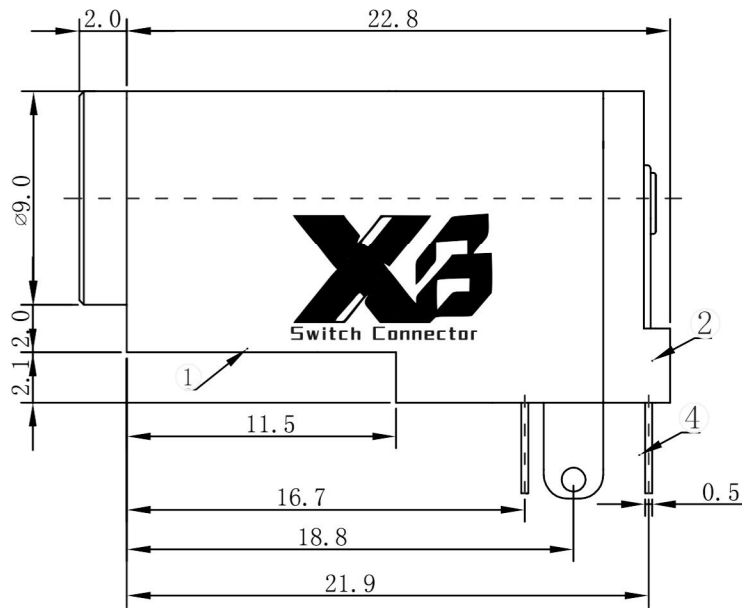


T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-sided view)

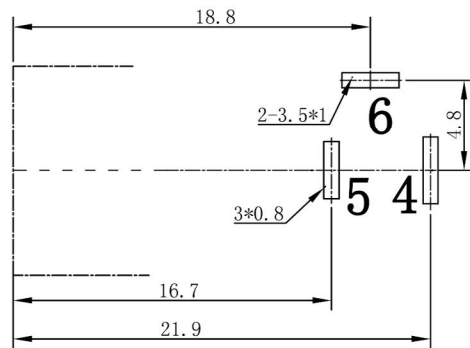

CIRCUIT DIAGRAM



SPECIFICATION

1. Rating : DC 12V 30V, 3.0A 5.0A
2. Contact resistance : $\leq 30\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

PIN	$\phi 1.65$	$\phi 2.0$	$\phi 2.35$	$\phi 2.5$
APPD				

		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD										
		TITLE : XB DC Power Jack						6	PIN	BRASS	1	Ni PLATED
		MODEL : XB-DC-2005WF						5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED
UNIT : MM		DWN.	ZENQ. CHEN	DATE	TOLERANCE <=1.5mm ± 0.1 > 1.5mm ± 0.2 >=10.0mm ± 0.3	ANGLE TOL ± 2°	4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED	
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE			3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED	
VERSION		01	APPD.	FET. LONG. HE			DATE	2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED
								1	HOUSING	PBT UL94-V0	1	BLACK
								NO.	PART NAME	MATERIAL	QTY.	FINISHING