

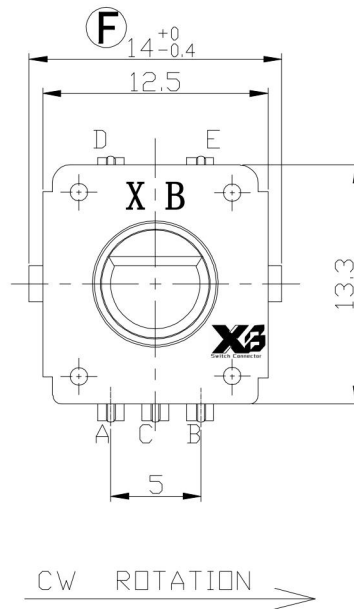
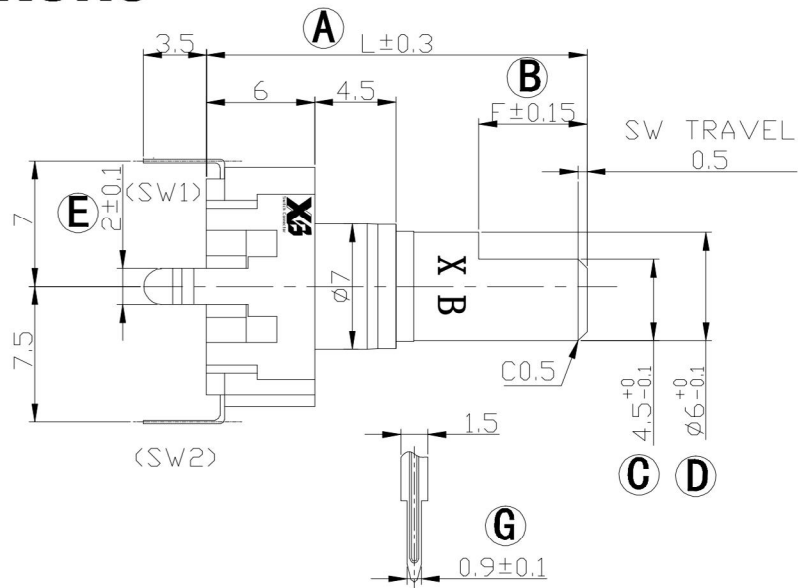


ROHS

DIMENSIONS

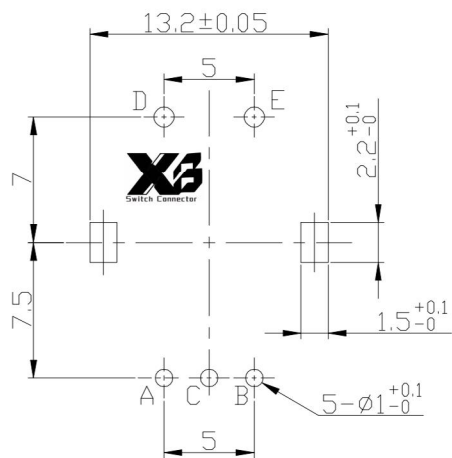


(SW02)CIRCUIT DIAGRAM



P.C.B MOUNTING HOLE DETAIL

A-C 端子間
TERMINAL A-C

B-C 端子間
TERMINAL B-C

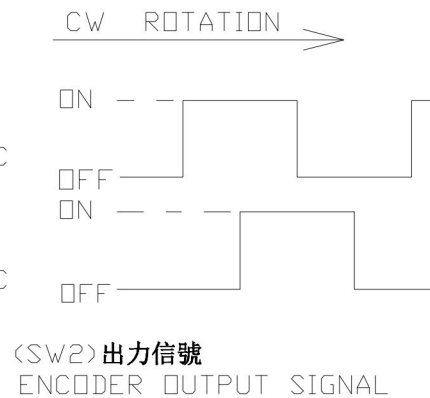

L	17.5	20	25
F	5	7	12
			↑

SPECIFICATION (INITIAL)

RATING: DC 5V 0.5mA 10mA

ANGLE: FULL ROTATION ANGLE: 360 DEGREES

CONTACT RESIS TANCE: 100mΩ max

INSULATION RESISTANCE: 100MΩ DC 250V 1mA

WITHSTAND VOLTAGE: 300V AC/min or

OPERATION FORCE: 6 ± 3N 600gf ± 300gf

SWITCHING LIFE: 20,000 cycles

注: A-G为品管重点管控尺寸。

X3 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: GAO PENG
DATE: 07/23/13

CHECKED BY: PANG DONG
DATE: 07/23/13

APPROVED BY: HE. LONG. FEI
DATE: 07/23/13

MAT'L

FINISH

SCALE

TITLE

MODLE

DWG NO.

ENCODER

ENCODER W/I SWITCH

PART NO.

ENCODER

ENCODER W/I SWITCH

PART NO.

ENCODER

ENCODER W/I SWITCH

PART NO.

ENCODER

ENCODER W/I SWITCH

PART NO.

SIZE

A4

VER

R2

2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012
ITEM NO.	DESCRIPTION	DRAWN	DATE