


ROHS




SPECIFICATION

1. Rating : DC 30V 0.5A ; 1.0A ;
2. Contact resistance : $\leq 30\text{m}\Omega$;
3. Insulation resistance : $\geq 100\text{M}\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles °

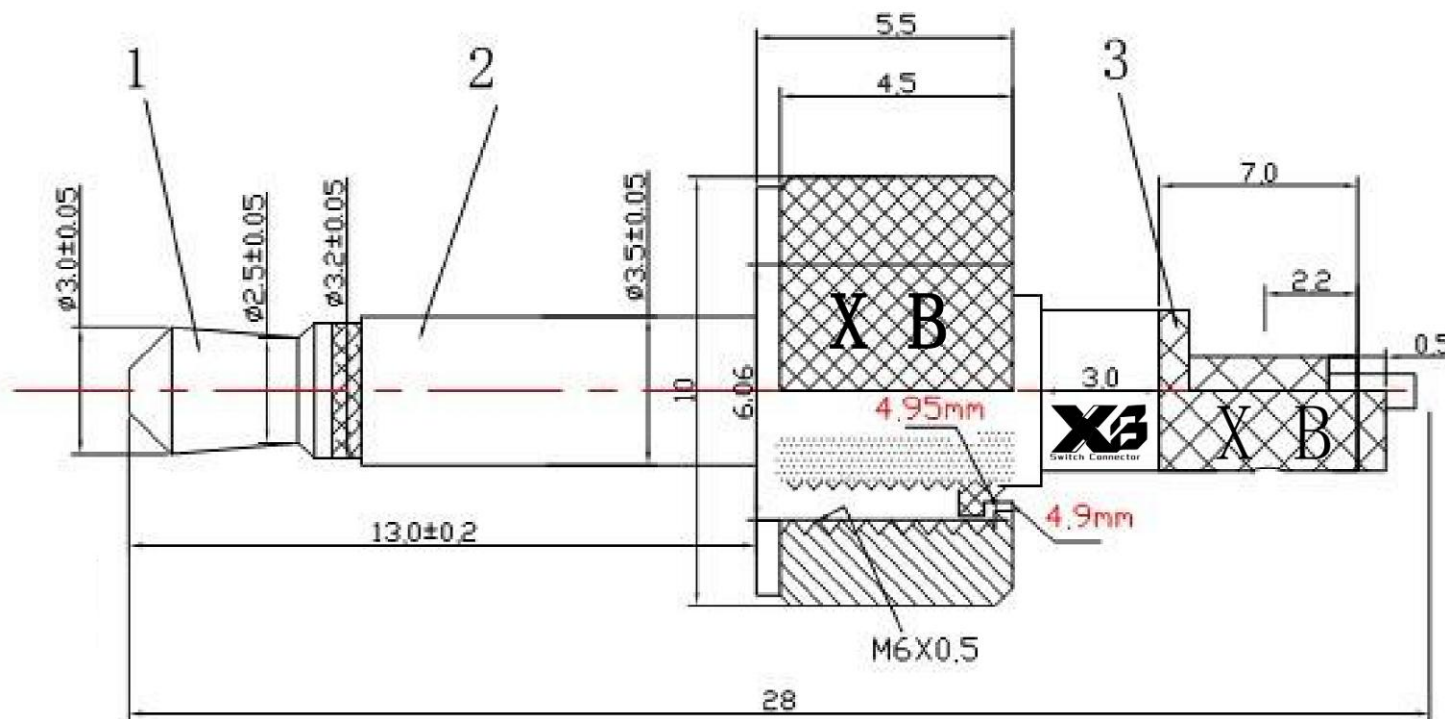

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE :	XB Audio Plug
MODEL :	XB-P2501-M 2.5单声道 带螺帽锁



TOLERANCE
 $< -1.5\text{mm} \pm 0.1$
 $> 1.5\text{mm} \pm 0.2$
 $\geq 10.0\text{mm} \pm 0.3$

ANGLE TOL
 $\pm 2^\circ$

2	TERMINAL	PBS STRIP	5	Ag PLATED
1	HOUSING	PBT	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING