
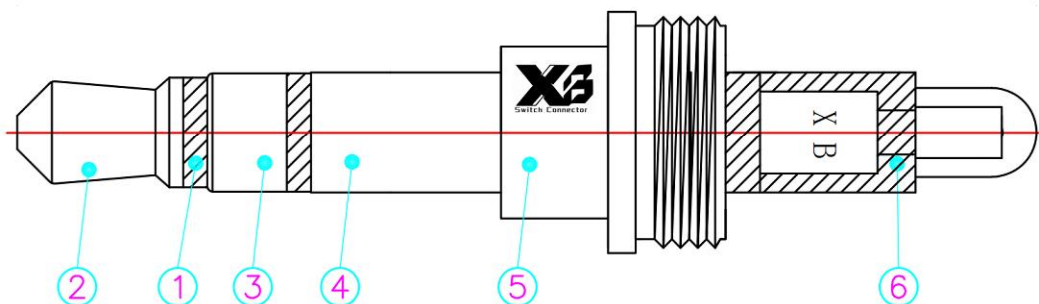
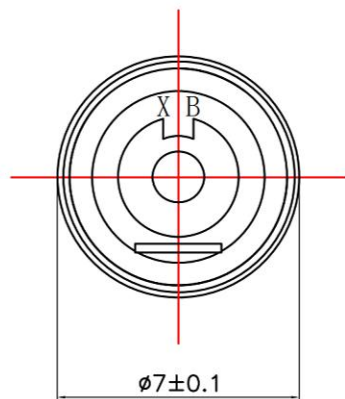
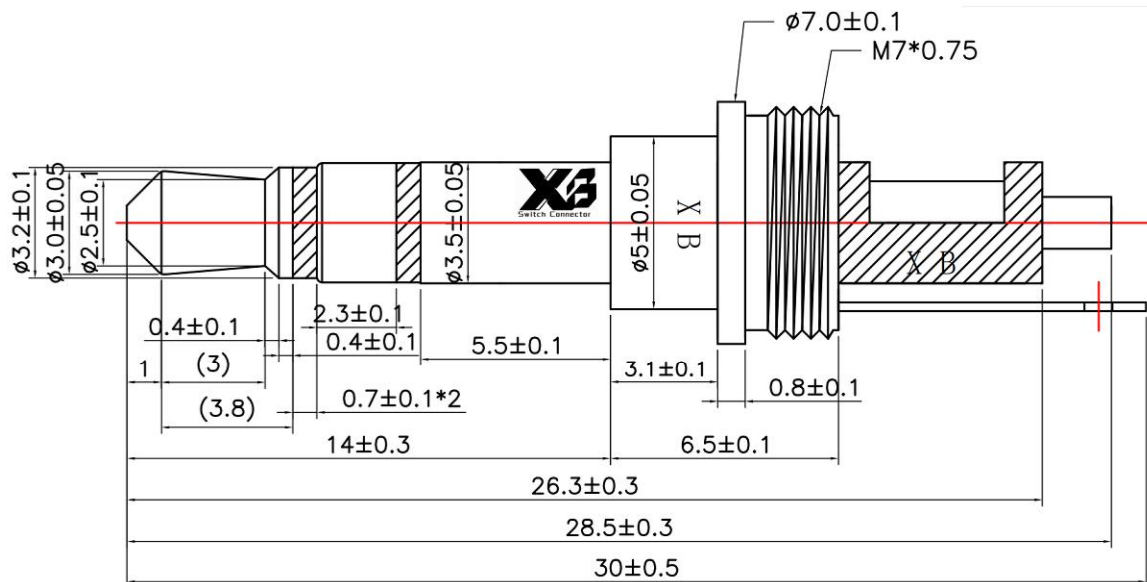


ROHS



SPECIFICATION

- 1.Rating : DC 30V 0.5A ; 1.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles 。

Technology Request:

- 1.Outlook:
No burr, no hurt.
- 2.Electronic performance:
a:Insulation resistance:
Above DC500V/100MΩ;
b:Endure voltage:
AC500V at 1 minute;
c:Contact resistance:
Under 30mΩ;
- 3.Insertion force & withdrawal force:
0.3—3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.


6	4.9*12.4*3.8孔 焊片	C2680	Ni 1~3um/Au0.8u"
5	M7*0.75*6.5*3.1管	C3604	Ni 1~3um/Au0.8u"
4	三段管	C3604	Ni 1~3um/Au0.8u"
3	二段管	C2680	Ni 1~3um/Au0.8u"
2	R头	C3604	Ni 1~3um/Au0.8u"
1	PLASTIC	POM	BLACK
NO.	PART	MATERIAL	PLATING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB Audio Plug

MODEL : XB-P3535070



TOLERANCE

<1.5mm	± 0.1
> 1.5mm	± 0.2
>=10.0mm	± 0.3

ANGLE TOL
 $\pm 2^\circ$

2	TERMINAL	PBS STRIP	5	Ag PLATED
1	HOUSING	PBT	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING