

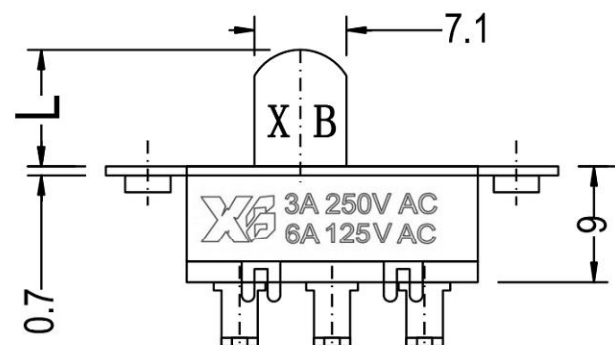


ROHS

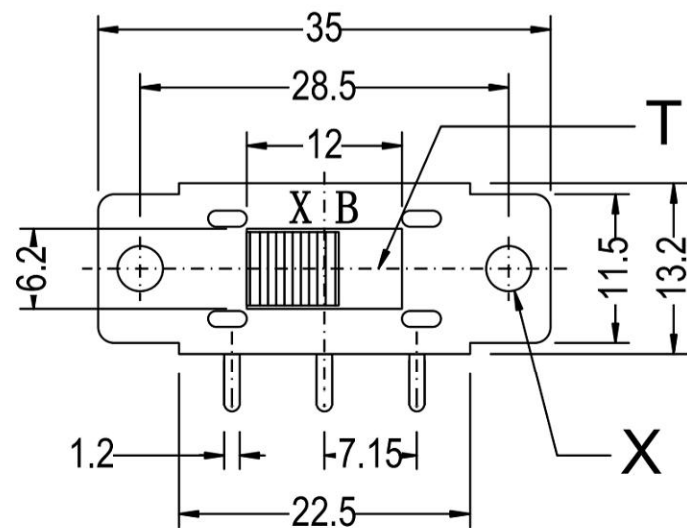


SCHEMATIC



X=H : $\phi 3.5$
X=M : M3X0.5
X=S : 切邊

L=0 : 0mm
L=9 : 9mm

T=A : 110/220
T=B : 115/230

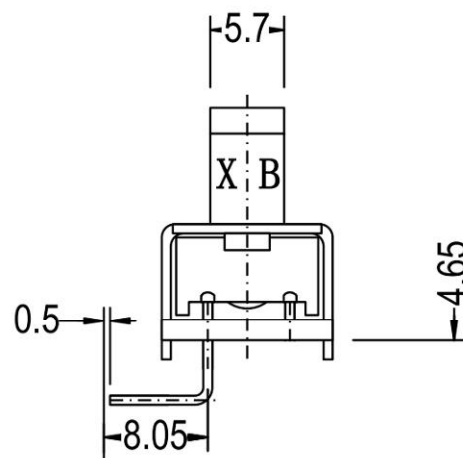

SPECIFICATION

Circuit : ON-ON(1P2T) (1P3T)
Rating : A.C. 125V 6A
Contact R.[max] : D.C. 5V 1A 30m Ω
Insulation R.[min] : D.C. 500V 100M Ω
Withstand VOL. : A.C. 1,000V 1minute
Operating force : 500 $\pm$ 200g
Life cycle[max] : 10,000 CYCLES

SPECIFICATION (INITIAL)

RATING:	3A 6A 125V 250V AC
CONTACT RESISTANCE:	Not more than 30m Ω
INSULATION RESISTANCE:	500M Ω at 1500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	300 $\pm$ 100g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB SLIDE SWITCH

MODEL : XB-SS-22K38-3P 1P2T大功率拨动开关 1P3T大电流滑动开关



TOLERANCE
<=1.5mm $\pm$ 0.1
> 1.5mm $\pm$ 0.2
>=10mm $\pm$ 0.3

ANGLE
 $\pm 2^\circ$

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VERSION	01	APPD.	FEI. LONG. HE	DATE

NO.	PART NAME	MATERIAL	QTY.	FINISHING
7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK