



ROHS

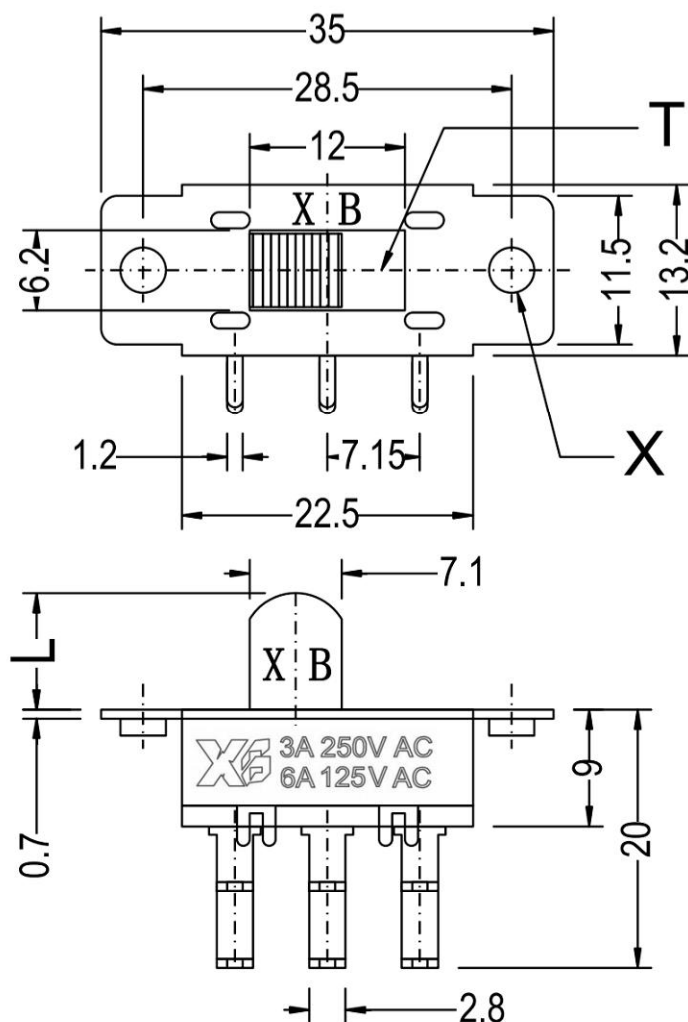

SCHEMATIC



X=H : $\phi 3.5$
X=M : M3X0.5
X=S : 切邊

L=0 : 0mm
L=9 : 9mm

T=A : 110/220
T=B : 115/230

SPECIFICATION

Circuit : ON-ON(1P2T)(2P2T)
Rating : A.C. 125V 6A
Contact R.[max] : D.C. 5V 1A 30m Ω
Insulation R.[min] : D.C. 500V 100M Ω
Withstand VOL. : A.C. 1,000V 1minute
Operating force : 500 $\pm$ 200g
Life cycle[max] : 10,000 CYCLES

SPECIFICATION (INITIAL)

RATING:	3A 6A 125V 250V AC
CONTACT RESISTANCE:	Not more than 30m Ω
INSULATION RESISTANCE:	500M Ω at 1500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 min
OPERATION FORCE:	300 $\pm$ 100g
SWITCHING LIFE:	10000 Cycles(6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB SLIDE SWITCH

MODEL : XB-SS-22K38 大电流拨动开关 两档 三档 滑动开关弯脚2P3T 2P2T



TOLERANCE
<=1.5mm $\pm$ 0.1
> 1.5mm $\pm$ 0.2
>=10mm $\pm$ 0.3

ANGLE
 $\pm 2^\circ$

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING