



SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	3A 250V AC; 6A 125 AC
FUNCTION	2P-9T
Contact Resistance	50MΩ Max
Insulation Resistance	100MΩ Min
Operating Force	400gf±100gf
Operating Life	10,000cycle

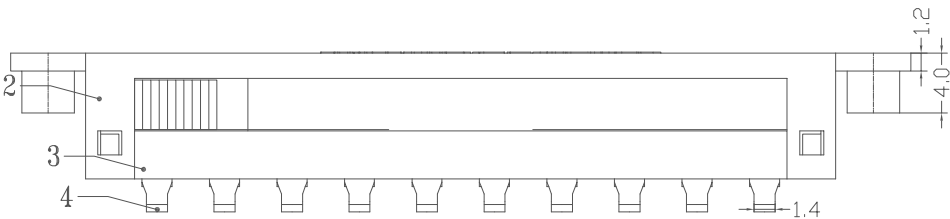

Model No	X (mm)
XB-T26-K2922-20P-E-SMD-G2	2mm
XB-T26-K2922-20P-E-SMD-G3	3mm
XB-T26-K2922-20P-E-SMD-G4	4mm
XB-T26-K2922-20P-E-SMD-G5	5mm
XB-T26-K2922-20P-E-SMD-G6	6mm
XB-T26-K2922-20P-E-SMD-G7	7mm
XB-T26-K2922-20P-E-SMD-G8	8mm
XB-T26-K2922-20P-E-SMD-G9	9mm
XB-T26-K2922-20P-E-SMD-G10	10mm

NO	PARTS	MATERIALS	Q' TY	FINISH
7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag PLATED
4	TERMINAL	BRASS	20	Ag PLATED
3	CASE	PA66	1	BLACK
2	COVER	PA66	1	BALCK
1	KNOB	PA66	1	BALCK

ITEM NO.	DESCRIPTION	DRAWN	DATE
6	新增Rating选项		
5	更新样式		
4	更新Rating		
3	更新Rating		
2	新增SPEC		
1	更新封面		

**XBG 东莞市溪榜电子有限公司**  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:  
 Up to 5 ±0.2  
 Above 5 -15 ±0.3  
 Above 15 -30 ±0.4  
 Above 30 -50 ±0.5  
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TI'TLE	
PENG GAO	01/29/24			
CHECKED BY:	DATE	FINISH	MODLE	
ZENG CHEN	01/29/24			
APPROVED BY:	DATE	SCALE	DWG NO.	SIZE
ZENG CHEN	01/29/24	1:1	XB-T26-K2922-20P-E-SMD	A4
		SHEET NO.	PART NO.	VER
		1 of 1	XB-T26-K2922-20P-E-SMD	