
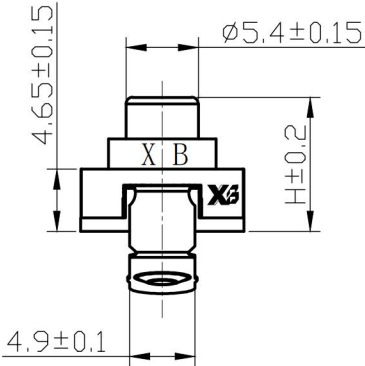
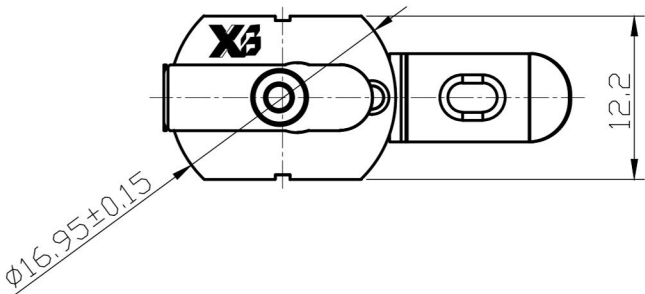
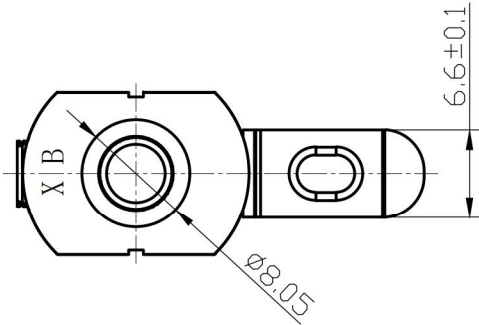


H尺寸
9.5
9.8
10
10.5
11
12
13
14
15

ROHS

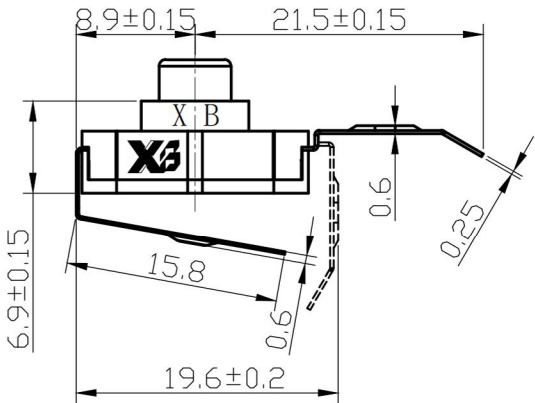

MATERIAL:

Actuator: SUS ;

Top Base: SUS;


Buttom Base:PA66+GF ;

Terminal: Brass,Silver plated ;

Nut: Brass, Ni plated .


The material contained in this drawing is the property of XiBang. Any use other than that specfically authorized by XiBang i5 prohibited. The above drawing IS subjected to change for improvement without prior notice.

SCHEMATIC

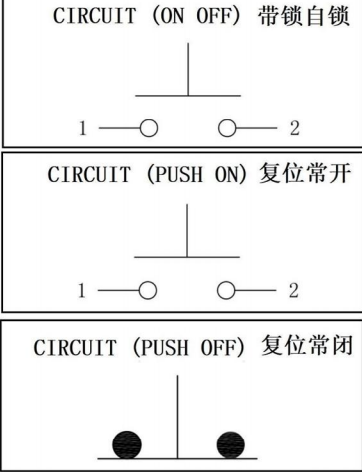

电气原理图

- 技术要求:
1. 电气性能
 - 额定电流/电压:1A/250VAC;
 - 接触电阻:≤100mΩ ;
 - 绝缘电阻:≥100MΩ ;
 - 介电强度:≥500VAC/1min;
 2. 环境温度:-15℃~75℃;
 3. 相对湿度: ≤95% (40℃) ;
 4. 操作力:800±200g;
 5. 未注公差均按GB / T1804-m级。

 Switch Connector	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD										
	TITLE : PUHS BUTTON SWITCH										
	MODEL : XB-YT-1702T-L										
UNIT : MM	DWN.	ZENQ. CHEN	DATE		TOLBRANCE ≤1.5mm±0.1 > 1.5mm±0.2 ≥10mm±0.3	ANGLE ±2°					
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE								
VERSION	01	APPD.	FEI. LONG. HE	DATE							
							7	SPRING	STEEL WIRE	1	NATURE
							6	STEEL BALL	STEEL	1	NATURE
							5	BOARD	PHENOLIC RESIN	1	NATURE
							4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
							3	FRAME	IRON STRIP	1	Ni PLATED
							2	TERMINAL	BRASS STRIP	8	Ag PLATED
							1	KNOB	POM	1	BLACK
							NO.	PART NAME	MATERIAL	QTY.	FINISHING