


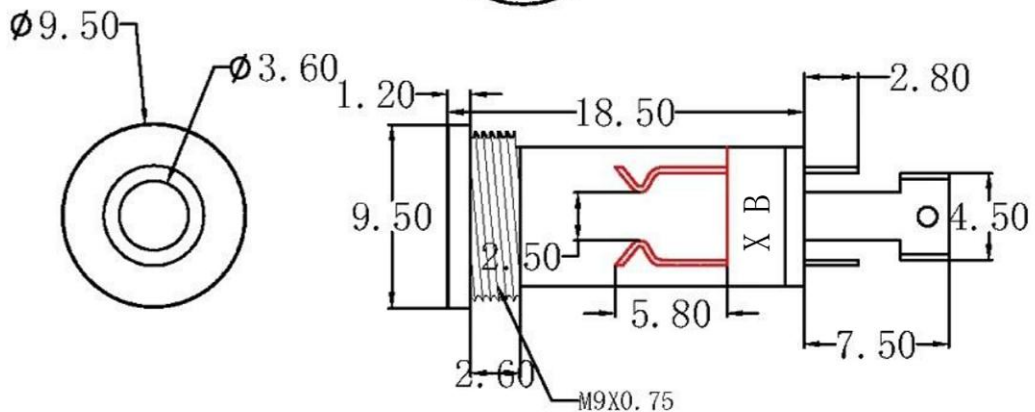
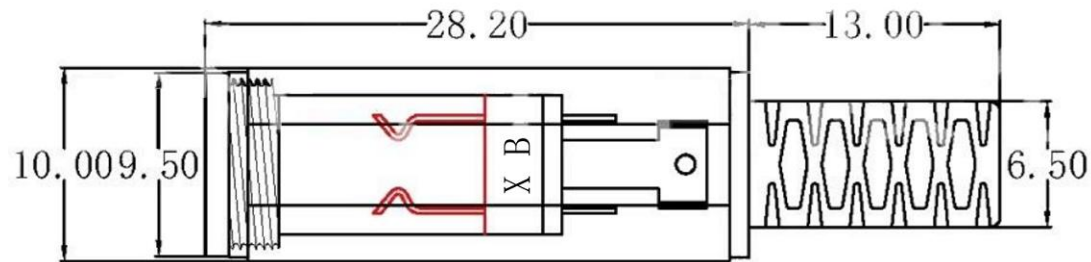
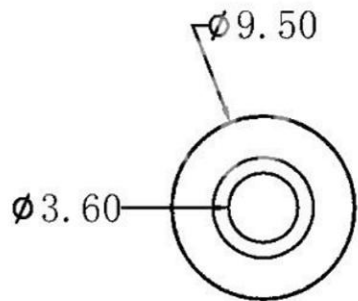


ROHS

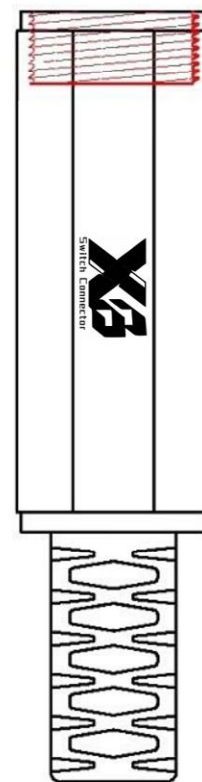

Schematic	
PIN	
1	sleeve
2	tip

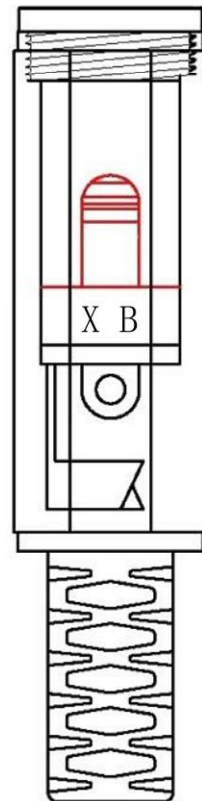

SPECIFICATION


- 1.Rating : DC 30V 0.5A ; 1.0A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB Audio jack

MODEL : XB-PJ-1039-35 单声道3.5音频插座焊线式



UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE		<=1.5mm ± 0.1 > 1.5mm ± 0.2
VERSION	01	APPD.	FEI. LONG. HE	DATE		>=10.0mm ± 0.3

TOLERANCE

<-1.5mm	± 0.1
> 1.5mm	± 0.2
>=10.0mm	± 0.3

ANGLE TOL
 $\pm 2^\circ$

2	TERMINAL	PBS STRIP	5	Ag PLATED
1	HOUSING	PBT	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING