


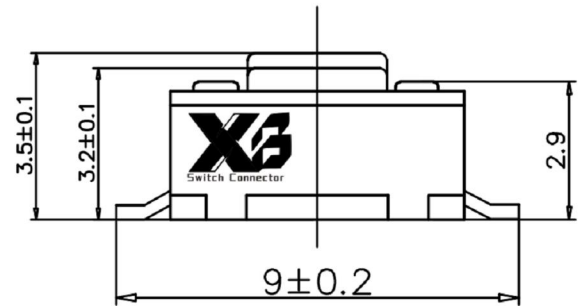
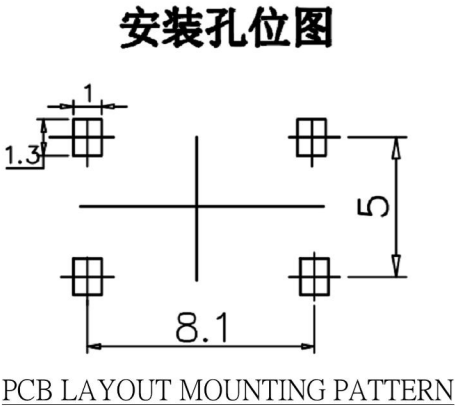
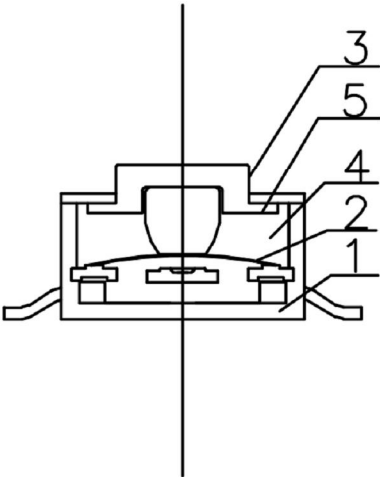


ROHS

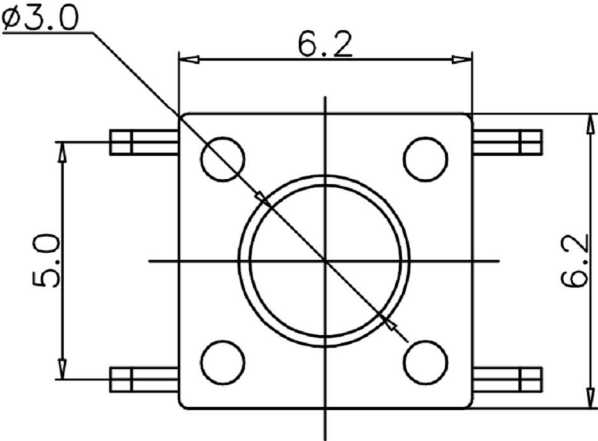


SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.3 ± 0.1mm
Operating Force	75gf ± 5gf
Operating Life(cycles)	100,000

5	HSa6.0428.035-5	按钮	1	PPA
4	HSa6.0428.018-4	按垫	1	橡胶
3	HSa6.0428.030-3	盖板	1	PPA(黑)
2	HSa6.0428.005-2	簧片	1	不锈钢复银
1	HSa6.0428.025-1	底座组	1	PPA(黑) 黄铜带H65Y0.3mm
序号	编号	材料	数量	材料

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD				 								
TITLE : XB TACT SWITCH								8	REEL	PS	1	BLUE		
MODEL : XB-TS-4DV035 贴片开关6.2x6.2x3.5mm								7	CARRIER	PS	1	CLEAR		
								6	COVER TAPE	PS	1	CLEAR		
UNIT : MM		DWN.		DATE		TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 >=10.0mm ± 0.3		ANGLE TOL ± 2°		5	CONTACT	PBS STRIP	1	Ag CLAD
SCALE : 5 : 1		CHK'D		DATE						4	COVER	IRON STRIP	1	Ni PLATED
VERSION 01		APPD.		DATE						3	CASE	NYLON	1	BLACK
										2	TERMINAL	BRASS STRIP	2	Ag PLATED
										1	KNOB	NYLON	1	BLACK
										NO.	PART NAME	MATERIAL	QTY.	FINISHING