

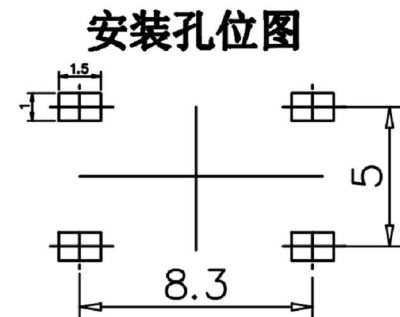
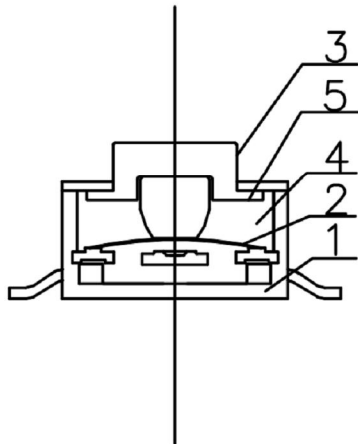
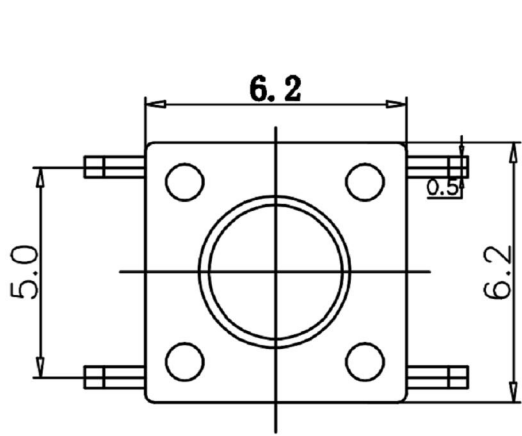



ROHS



PCB LAYOUT MOUNTING PATTERN

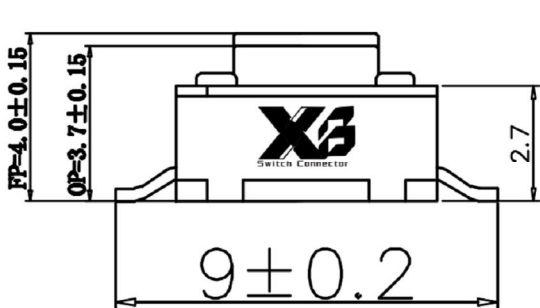

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.3±0.1mm
Operating Force	75gf±5gf
Operating Life(cycles)	100,000

5	HS86.0428.035-5	按钮	1	PPA (红色)
4	HS86.0428.018-4	按垫	1	橡胶
3	HS86.0428.030-3	盖板	1	PPA(黑)
2	HS86.0428.005-2	簧片	1	不锈钢复银
1	HS86.0428.025-1	底座组	1	PPA(黑)黄铜带H65Y0.3mm
序号	编号	材料	数量	材料

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD																
					TITLE : XB TACT SWITCH							8	REEL	PS	1	BLUE
					MODEL : XB-TS-4DV040 轻触开关贴片6.2x6.2x4mm 贴片开关							7	CARRIER	PS	1	CLEAR
UNIT : MM		DWN.		DATE		TOLERANCE <=1.5mm ± 0.1 > 1.5mm ± 0.2 >=10.0mm ± 0.3	ANGLE TOL ± 2°	6	COVER TAPE	PS	1	CLEAR				
SCALE : 5 : 1		CHK'D		DATE				5	CONTACT	PBS STRIP	1	Ag CLAD				
VERSION		01	APPD.	DATE				4	COVER	IRON STRIP	1	Ni PLATED				
								3	CASE	NYLON	1	BLACK				
								2	TERMINAL	BRASS STRIP	2	Ag PLATED				
								1	KNOB	NYLON	1	BLACK				
							NO.	PART NAME	MATERIAL	QTY.	FINISHING					