


NOTES:
SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

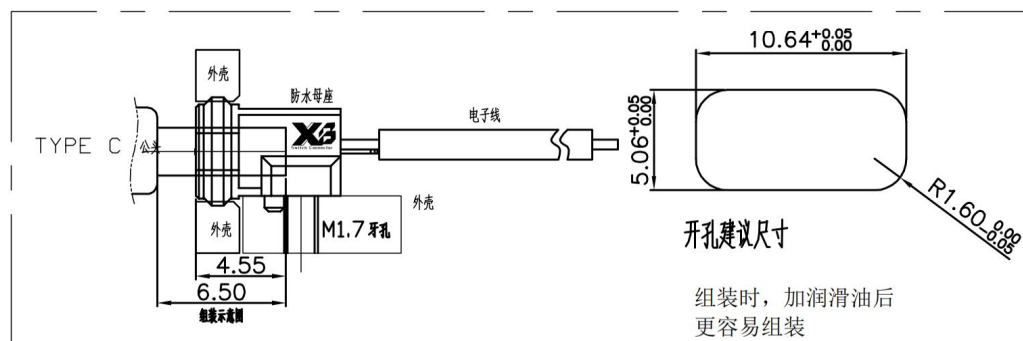

组装时，加润滑油后
更容易组装

5	Screw	1	C3604 Ni Plating	Ni:40°120u";
4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni:40°120u";
3	M-D2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni T=0.20mm	Ni:40°160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

X. ±0.50		X.° ±2°		UNITS mm	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.											
.X ±0.30		.X° ±1°														
.XX ±0.10		.XX° ±0.5°		MAT'L 	PART NO. XB-USB-C-1139		TITLE: 外接线式插孔TYPEC 2PIN									
.XXX ±0.05																
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XI BANG ELECTRONIC TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XI BANG ELECTRONIC TECHNOLOGY CO.,LTD.					FINISH 		APPD: GAO PENG		DWG NO.: XB-USB-C-1139							
											CHKD: HE LONG, FEI					
					Q'TY 		 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1/1</td><td>1/2</td><td>A1</td></tr></table>		SCALE	SHEET			REV.	1/1	1/2	A1
									SCALE	SHEET			REV.			
									1/1	1/2	A1					
DR: PANG DONG																