

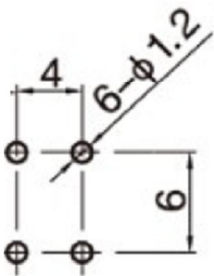
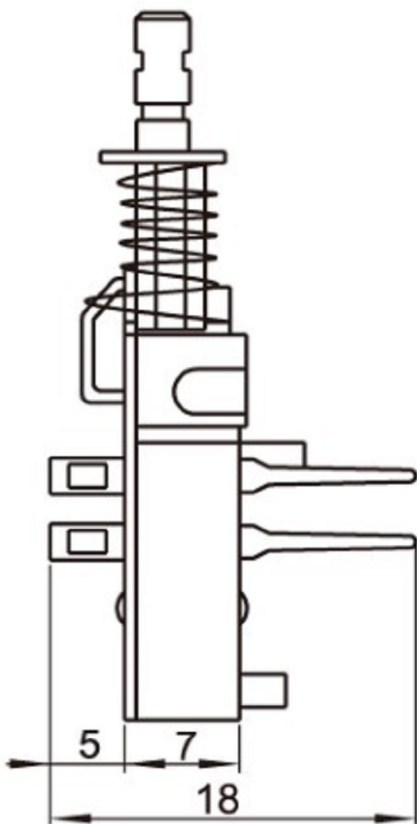


ROHS

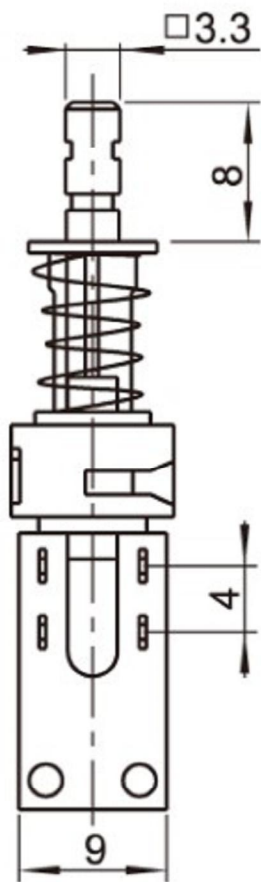

PCB LAYOUT



SCHEMATIC

ITEM: PERFORMANCE
Title: PUSH BUTTOMN SWICH
Model: XB-PBS-22-2(4P)
Rating: 0.3A 0.5A 12V 30V DC
Function: 2P2T
Timing:Non-shorting
ContactResistance(mohms):50mΩ max
Insulation Resistanc(Mohms):100MΩ min at 500V DC
Dielectric Strength(V):AC 500V for 1 min
LifeTest:10,000 Cycles

XB Switch Connector		东莞市溪榜电子有限公司											
		DONG GUAN XI BANG ELECTRONICS CO.,LTD											
		TITLE : XB PUHS BUTTON SWITCH											
MODEL : XB-PBS-22-2(4P) 直键开关侧按90度													
UNIT : MM		DWN.	ZENQ. CHEN	DATE	2024-05-08	TOLERANCE <=1.5mm ± 0.1 >1.5mm ± 0.2 >=10mm ± 0.3	ANGLE ± 2°	8	CONTACT CLIP	PBS STRIP	2	Ag CLAD	
SCALE : 3 : 1		CHK'D	PANG. DONG	DATE	2024-05-08			7	RING	IRON STRIP	1	Zn PLATED	
VERSION		01	APPD.	FEI. LONG. HE	DATE			2024-05-08	6	SPRING	SUS	1	NATURE
								5	SLEEVE	POM	1	GRAY	
								4	CASE	NYLON	1	GRAY	
								3	COVER	PBT	1	GRAY	
								2	TERMINAL	BRASS STRIP	6	Ag PLATED	
								1	KNOB	POM	1	YELLOW	
								NO.	PART NAME	MATERIAL	QTY.	FINISHING	