



ROHS

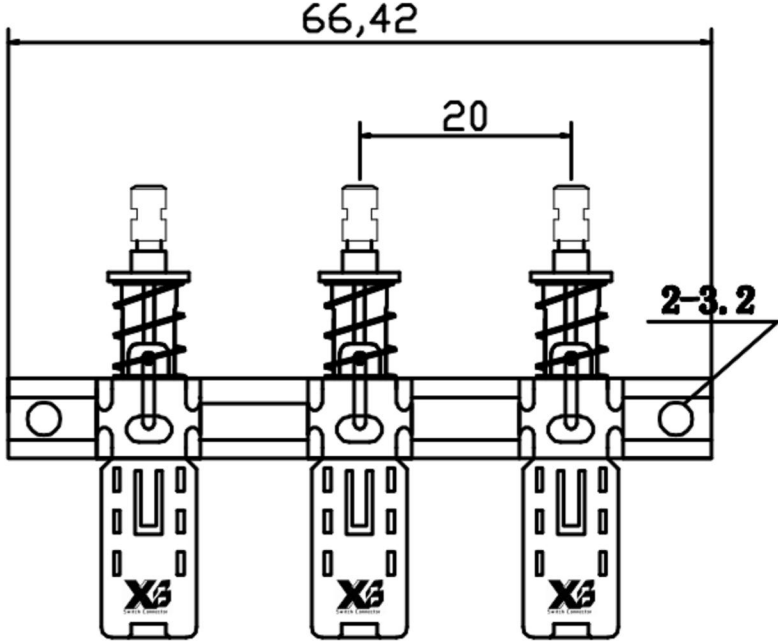


Key NO 1-3

- 1 KEY(开关) NO 1-3 Circul (型号) 2C-2P(6P)
travel lock 3.5mm
fuli 4.8mm
- 2 Key NO 1-3 Inter lock(互锁)
- 3 Key NO 1-3 pitch(间距) 20mm
- 4 铁架4按装孔是2-3.2
- 5 Termnal style

NO	3	2	1
----	---	---	---

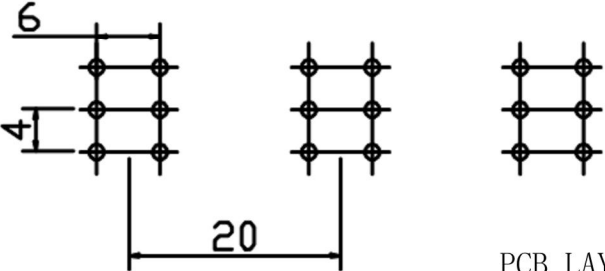

PCB LAYOUT




SCHEMATIC

ITEM: PERFORMANCE
Title: PUSH BUTTOMN SWICH
Model: XB-PBS-2H3-20
Rating: 0.3A 0.5A 12V 30V DC
Function: 2P2T 互动直键开关三联
Timing:Non-shorting
ContactResistance(mohms):50mΩ max
Insulation Resistanc(Mohms):100MΩ min at 500V DC
Dielectric Strength(V):AC 500V for 1 min
LifeTest:10,000 Cycles



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB PUHS BUTTON SWITCH
MODEL : XB-PBS-2H3-20 三联琴键开关 油烟机互动直键开关3联



UNIT : MM		DWN.	ZENQ. CHEN	DATE	2024-05-08	TOLERANCE	ANGLE ± 2°	
SCALE : 3 : 1		CHK' D	PANG. DONG	DATE	2024-05-08	<=1.5mm ± 0.1		
VERSION		01	APPD.	FEI. LONG. HE	DATE	2024-05-08		>1.5mm ± 0.2
								>=10mm ± 0.3

8	CONTACT CLIP	PBS STRIP	2	Ag CLAD
7	RING	IRON STRIP	1	Zn PLATED
6	SPRING	SUS	1	NATURE
5	SLEEVE	POM	1	GRAY
4	CASE	NYLON	1	GRAY
3	COVER	PBT	1	GRAY
2	TERMINAL	BRASS STRIP	6	Ag PLATED
1	KNOB	POM	1	YELLOW
NO.	PART NAME	MATERIAL	QTY.	FINISHING