


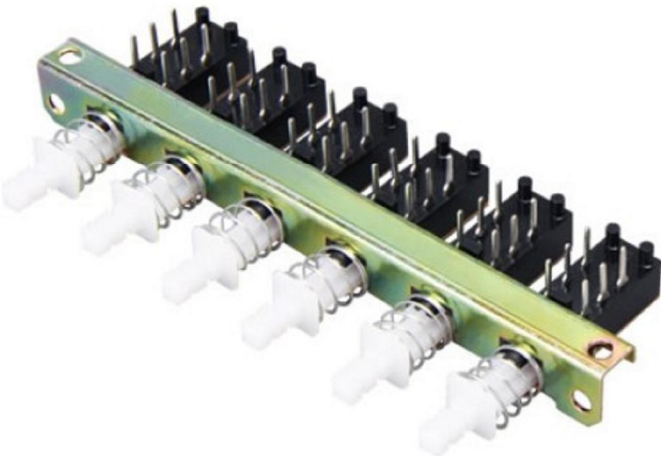
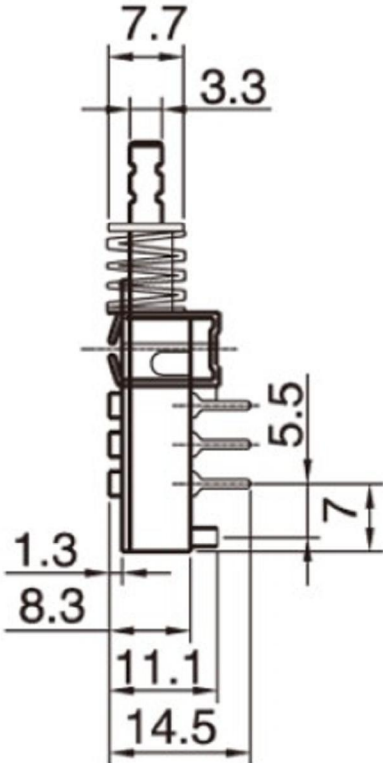


ROHS

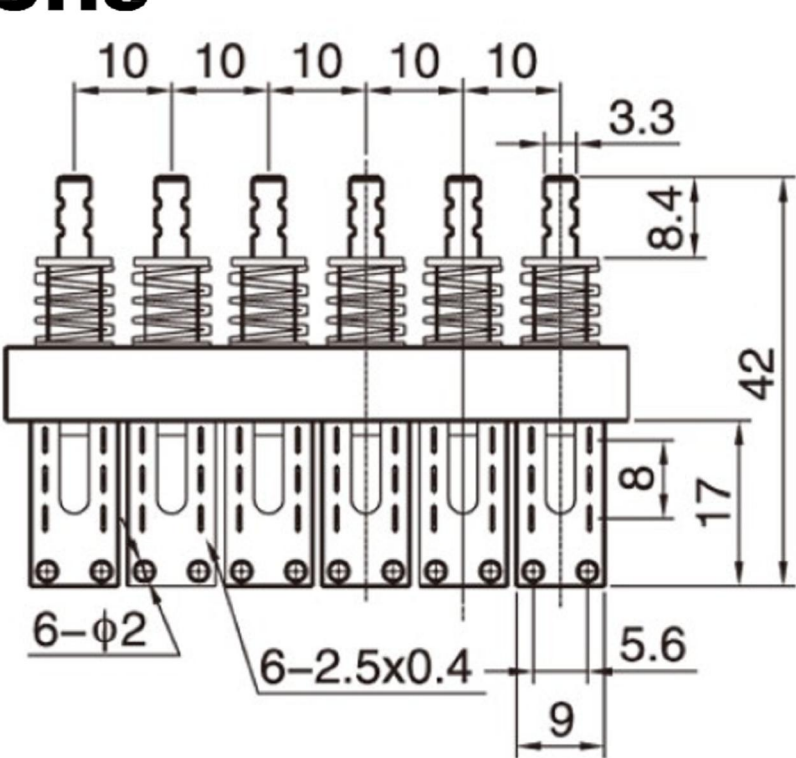

SCHEMATIC



PCB LAYOUT

ITEM: PERFORMANCE
Title: PUSH BUTTOMN SWICH
Model: XB-PBS-2H6-10
Rating: 0.3A 0.5A 12V 30V DC
Function: 2P2T 琴键开关互动5位
Timing:Non-shorting
ContactResistance(mohms):50mΩ max
Insulation Resistanc(Mohms):100MΩ min at 500V DC
Dielectric Strength(V):AC 500V for 1 min
LifeTest:10,000 Cycles

XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD											
TITLE : XB PUHS BUTTON SWITCH					TOLERANCE <=1.5mm ± 0.1 >1.5mm ± 0.2 >=10mm ± 0.3 ANGLE ± 2°						
MODEL : XB-PBS-2H6-10 互动五联按键开关											
UNIT : MM		DWN.	ZENQ. CHEN	DATE	2024-05-08						
SCALE : 3 : 1		CHK'D	PANG. DONG	DATE	2024-05-08						
VERSION	01	APPD.	FEI. LONG. HE	DATE	2024-05-08						
							NO.	PART NAME	MATERIAL	QTY.	FINISHING
							8	CONTACT CLIP	PBS STRIP	2	Ag CLAD
							7	RING	IRON STRIP	1	Zn PLATED
							6	SPRING	SUS	1	NATURE
							5	SLEEVE	POM	1	GRAY
							4	CASE	NYLON	1	GRAY
							3	COVER	PBT	1	GRAY
							2	TERMINAL	BRASS STRIP	6	Ag PLATED
							1	KNOB	POM	1	YELLOW