
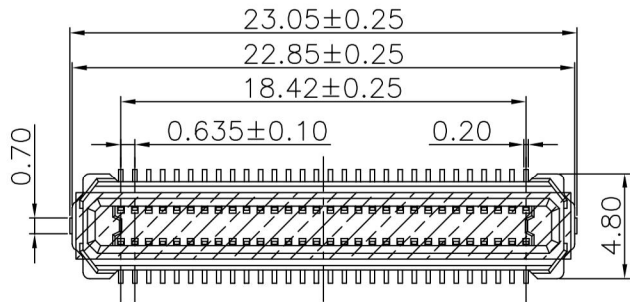
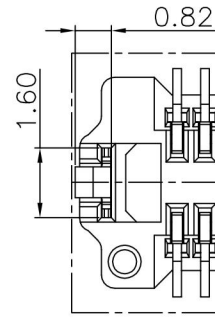
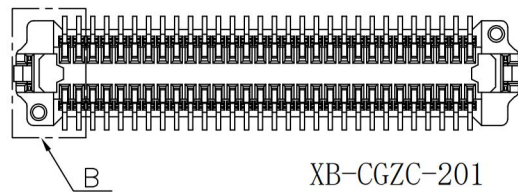




SECTION A-A

Specifications
Current Rating:0.5Amp
Insulation Resistance:500MΩMin.
Dielectric Withstanding Voltage:200VAC
Contact Resistance:120mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet XI BANG hazardous substances control standards.

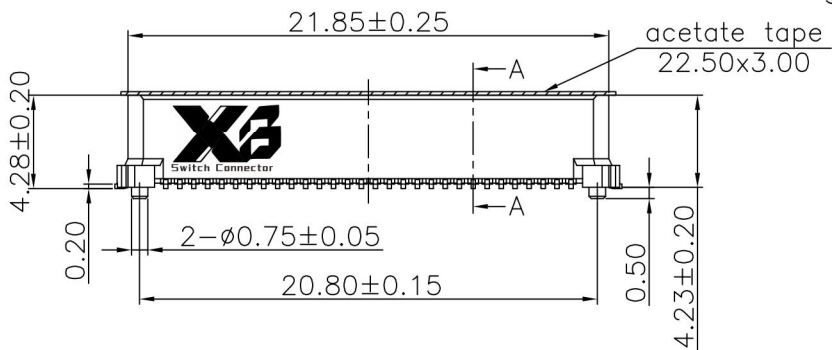

DETAIL B
2:1

Recommended P.C.Board Layout
(Tolerance:±0.05)

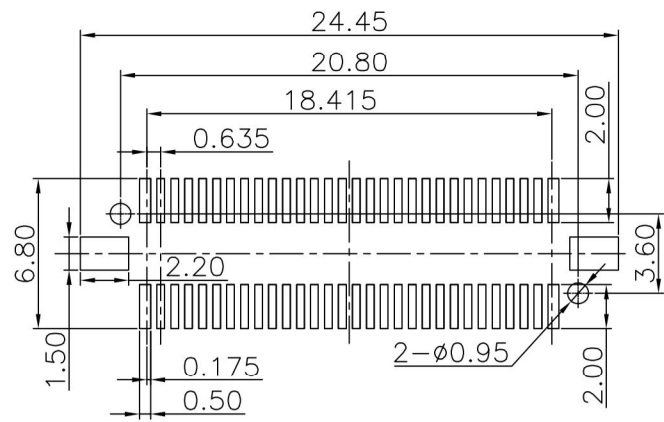

Ordering Information

201 - XX XX B 001 C 1 S X
No. Of Pins Per Row 30
Standard Plating 02=Gold Flash
09=3u"Au/Gold Flash
Color 1=Black
Standard Packing H=Acetate tape+Tape&Reel

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

3RD.ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
XB-CGZC-201
PART NO.
XB-CGZC-201

TITLE.
0.635mm PITCH BTB
FLOATING CONNECTOR