

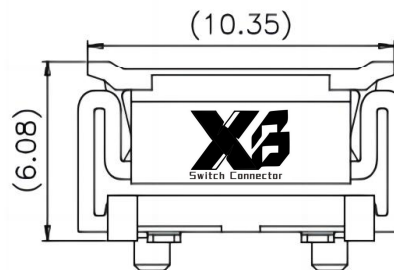
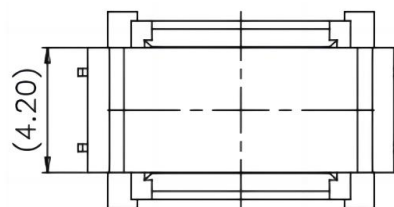
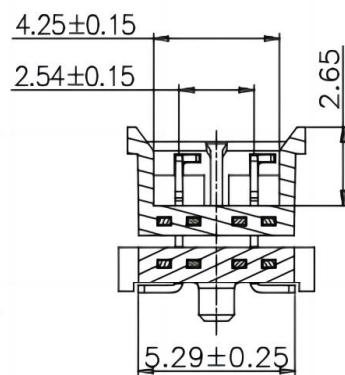



1 2 3 4 5 6 7 8 9

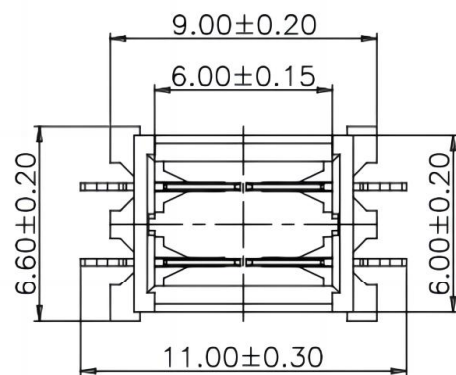


WITH CAP

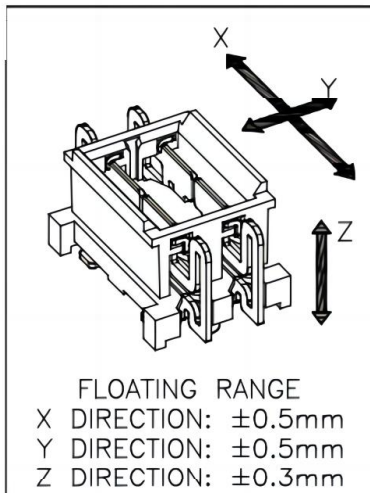

Specifications
Current Rating:2.5Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:250VAC
Contact Resistance:50mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
★All materials must meet XI BANG hazardous substances control standards.
★: Critical Characteristics.
indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
★: Safety Features
indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

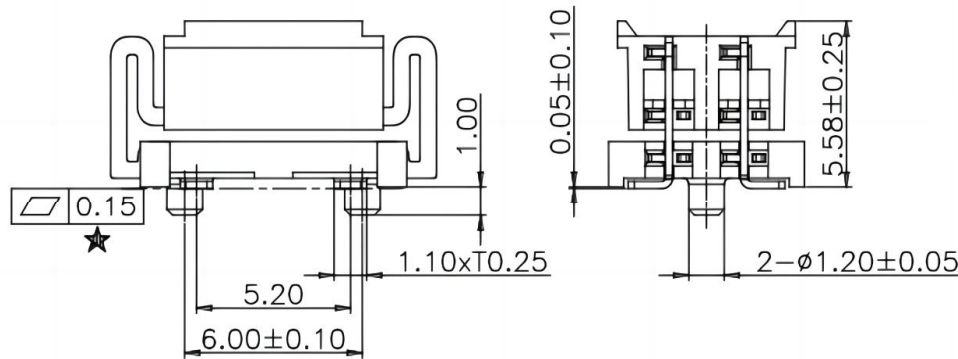

Recommended P.C.Board Layout
(Tolerance:±0.05)

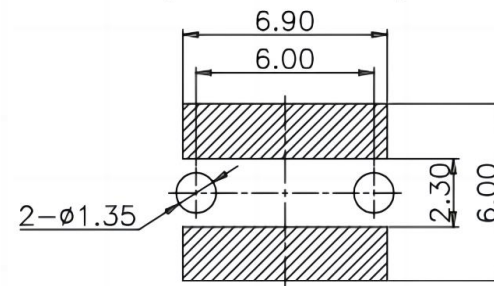

Ordering Information

202 - 02 02 B 001 C 1 S F

No. Of Pins Per Row 02
Standard Plating 02=Gold Flash
Color 1=Black
Standard Packing F=Cap+Tape&Reel

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X'±5.0'	X±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
XB-GZZC-202
PART NO.

TITLE.
2.54mm PITCH BTB
FLOATING CONNECTOR

REV. A UNIT. mm SCALE. 3:1

1 2 3 4 5 6 7 8 9