

1 2 3 4 5 6 7 8 9

F

E




D

C

B


A

Acetate tape
($\phi 5.0 \times 0.15$)

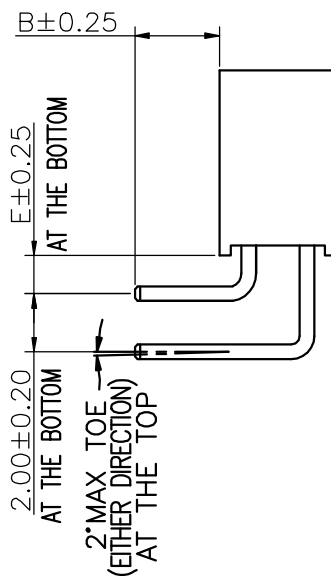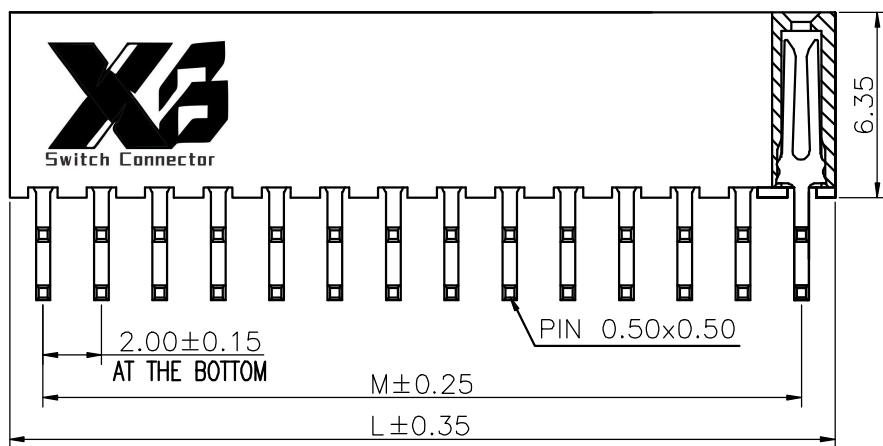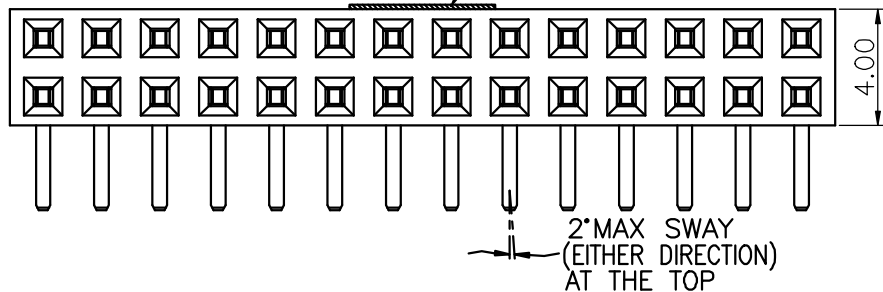

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:
PBT(Not resistant to high temperature),
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V-0
All materials must meet XI BANG
hazardous substances control standards.

Recommended P.C.Board
Layout
(Tolerance:±0.05)



No. of PIN/ROW	Dimension Information	
	M	L
02	2.00	4.30
03	4.00	6.30
04	6.00	8.30
05	8.00	10.30
06	10.00	12.30
07	12.00	14.30
08	14.00	16.30
09	16.00	18.30
10	18.00	20.30
11	20.00	22.30
12	22.00	24.30
13	24.00	26.30
14	26.00	28.30
15	28.00	30.30
16	30.00	32.30
17	32.00	34.30
18	34.00	36.30
19	36.00	38.30
20	38.00	40.30
21	40.00	42.30
22	42.00	44.30
23	44.00	46.30
24	46.00	48.30
25	48.00	50.30
26	50.00	52.30
27	52.00	54.30
28	54.00	56.30
29	56.00	58.30
30	58.00	60.30
31	60.00	62.30
32	62.00	64.30
33	64.00	66.30
34	66.00	68.30
35	68.00	70.30
36	70.00	72.30
37	72.00	74.30
38	74.00	76.30
39	76.00	78.30
40	78.00	80.30

Ordering Information

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code
207

Positioning column information
A=No locating post
B=Round post
C=Square post

Pin length
See the drawing

Color
1=Black
2=White
3=Yellow
E=Beige

Packing code
A=Box
B=Tray
C=Tube
D=Tape&Reel
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

No. of Pins per Row
02~40

Insulator Material
A=PBT
R=Nylon(Halogen Free)
C=LCP

Contact Material
A/S/K/T=Phosphor Bronze



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01 UNIT. mm SCALE. 4:1 PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0°	X.±0.30
.X'±3.0°	.X±0.25
.XX'±2.0°	.XX±0.15
.XXX'±1.0°	.XXX±0.10

DESIGNED:
CHECKED:
CO SIGNED:
APPROVED:

DATE:
DATE:
DATE:
DATE:

DWG. NO.
XB-PM-B-20-207
PART NO.

TITLE.
2.00 FEMALE HEADER
DUAL ROWS R/A TYPE
CONNECTOR

1 2 3 4 5 6 7 8 9