


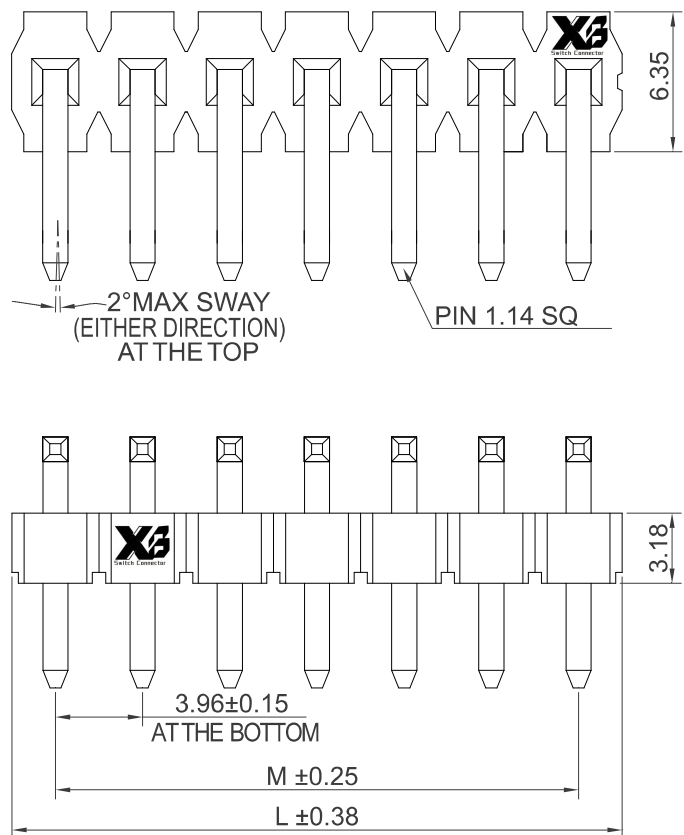

Specifications
 Current Rating:7.9Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:1000VAC
 Contact Resistance:30mΩMax.
 Operating Temperature:-40°C to +105°C

Materials

Contact Material:

Brass(Pin length less than 25mm)

Phosphor Bronze(The total length of pin is more than 25mm)


Insulator Material:

PBT(Not resistant to high temperature), Nylon(High temperature resistance), LCP(High temperature resistance),

UL 94V-0

XI BANG

Recommended P.C.Board Layout
 (Tolerance:±0.05)



No. of PIN/ROW	Dimension Information	
	M	L
02	7.92	3.96
03	11.88	7.92
04	15.84	11.88
05	19.80	15.84
06	23.76	19.80
07	27.72	23.76
08	31.68	27.72
09	35.64	31.68
10	39.60	35.64
11	43.56	39.60
12	47.52	43.56
13	51.48	47.52
14	55.44	51.48
15	59.40	55.44
16	63.36	59.40
17	67.32	63.36
18	71.28	67.32
19	75.24	71.28
20	79.20	75.24
21	83.16	79.20
22	87.12	83.16
23	91.08	87.12
24	95.04	91.08

Ordering Information

XB-PZ-B-396-101

Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple

Water code

No. of Pins per Row
 02~24

XX

Positioning column information
 A=No locating post
 B=Round post
 C=Square post

Plating code
 01=Tin
 02=Gold Flash
 05=Gold Flash/Tin
 22=Matte Tin

XX

Pin length
 See the drawing

XXX

Insulator Material
 A=PBT
 R=Nylon(Halogen Free)
 C=LCP

X

1
 Color
 1=Black
 2=White
 3=Yellow
 E=Beige

Contact Material
 A/S/K/T=Phosphor Bronze
 B/Z/H/W=Brass

X

Packing code

A=Box
 B=Tray
 C=Tube
 D=Tape&Reel
 E=Cap+Tube
 F=Cap+Tape&Reel
 G=Acetate Tape+Tube
 H=Acetate Tape+Tape&Reel



东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV.	UNIT	SCALE	PAGE
01	mm	3:1	1/1

GENERAL TOLERANCE

X.°±5.0°	X.±0.30
.X°±3.0°	.X±0.25
.XX°±2.0°	.XX±0.15
.XXX°±1.0°	.XXX±0.10

FWC NO.

XB-PZ-B-396-101

PART NO.

3.96 PIN HEADER
 SINGLE ROW R/A TYPE
 CONNECTOR