
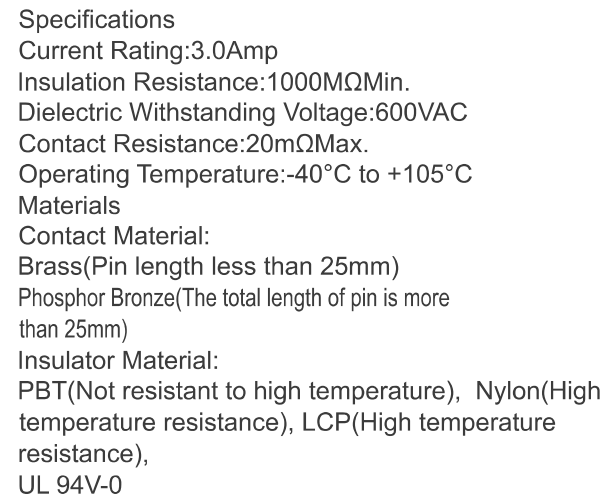


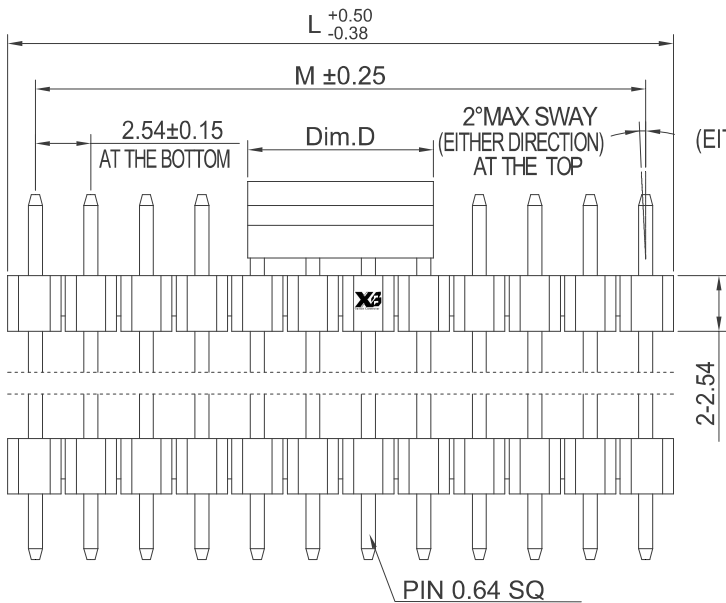

Dim.D	NOTE
5.00mm	02pins
6.00mm	03~08pins
8.50mm	09~40pins


No. of PIN/ROW	Dimension Information	
	M	L
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

Diagram illustrating the pin code structure for the component. The pin code is a 10-digit alphanumeric string. The digits are grouped into four main sections:

- Plastic specifications** (Digits 1-4):
 - 1=Single row
 - 2=Dual row
 - 3=Tripe row
 - 4=Quadruple
- Water code** (Digit 5):
 - No. of Pins per Row 02~40
- Positioning column information** (Digits 6-7):
 - A=No locating post
 - B=Round post
 - C=Square post
- Pin length** (Digit 8):
 - See the drawing
- Color** (Digit 9):
 - 1=Black
 - 2=White
 - 3=Yellow
 - E=Beige
- Contact Material** (Digit 10):
 - A/S/K/T=Phosphor Bronze
 - B/Z/H/W=Brass
- Packing code** (Digits 11-12):
 - A=Box
 - B=Tray
 - C=Tube
 - D=Tape&Reel
 - E=Cap+Tube
 - F=Cap+Tape&Reel
 - G=Acetate Tape+Tube
 - H=Acetate Tape+Tape&Reel

Ø1.02

Recommended P.C.Board
Layout
(Tolerance:±0.05)

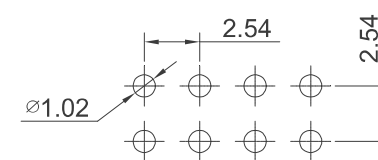


东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1	
------------	-------------	---------------	--------------	---

GENERAL TOLERANCE	
X.°±5.0°	X.±0.30
.X°±3.0°	.X±0.25
.XX°±2.0°	.XX±0.15
.XXX°±1.0°	.XXX±0.10

DWG. NO.	XB-PZ-A-254-202
PART NO.	

TITLE.	2.54 PIN HEADER DUAL ROWS DIP TYPE CONNECTOR		
--------	--	--	--