
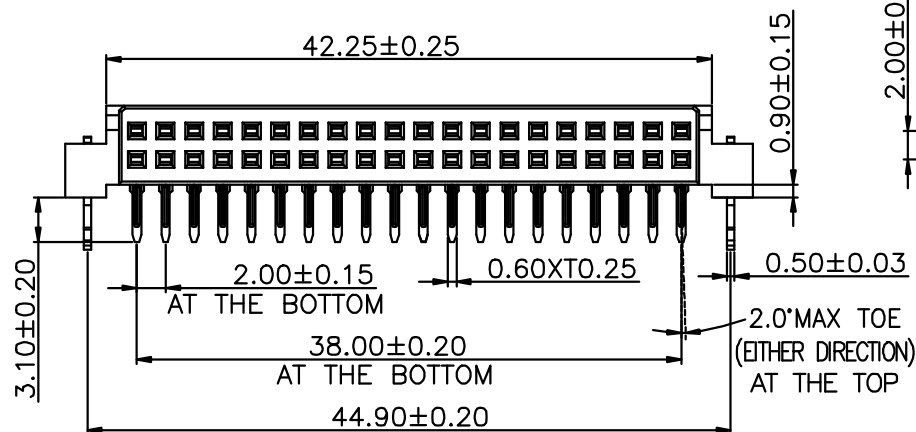


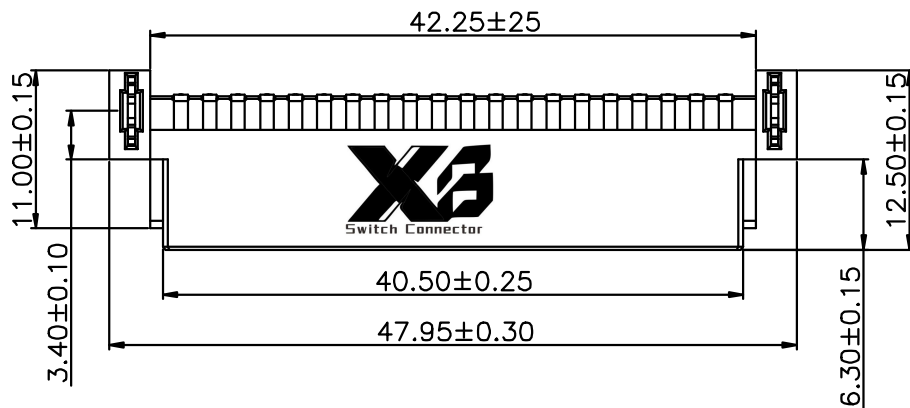


Ordering Information

XB-CAR-M-W201-C-W — XX XX A 001 K X S X


No. of Pins per Row 20
Standard Plating 01=Ni: 50~100u", Tin80~160u"
Color 2=White
Standard Packing C=Tube

Specifications

Current Rating:3.0AmpAC/DC
Voltage rating:250V AC/DC
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:1000VAC
Contact Resistance:30mΩMax.
Operating Temperature:-25°C to +85°C
Materials
Contact Material:Phosphor Bronze
Stabilizer Material:Brass
Insulator Material:Thermoplastic, UL 94V-0
PBT or the equivalent material
All materials must meet XI BANG
hazardous substances control standards.

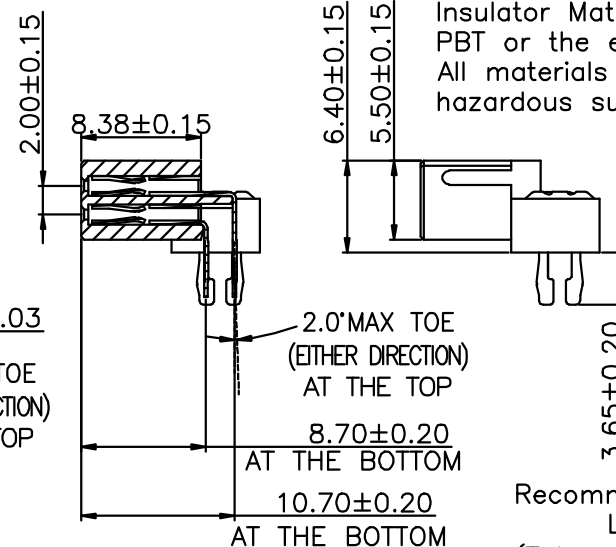

Recommended P.C.Board
Layout
(Tolerance:±0.05)

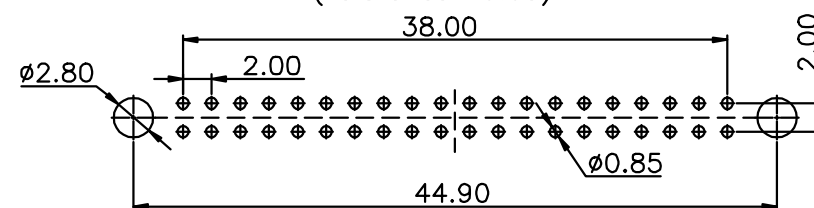

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. A UNIT. mm SCALE. 2:1 PAGE. 1/1

GENERAL TOLERANCE	
X.'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGN:
CHECKED:
CO SIGNED:
APPROVED:

DATE:
DATE:
DATE:
DATE:

DWG. NO.
XB-CAR-M-W201-C-W
PART NO.

TITLE.
2.00mm Pitch Connector