










ROHS

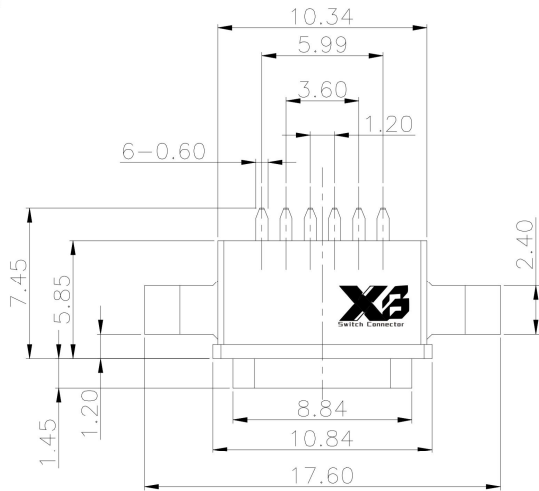

Recommended P.C.B. Layout
Unspecified tolerance: ± 0.05
(Top view)

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

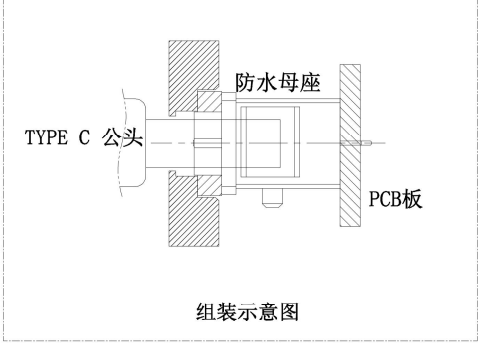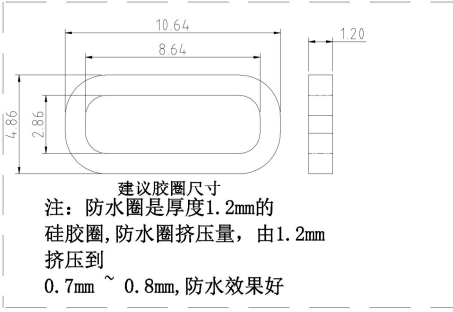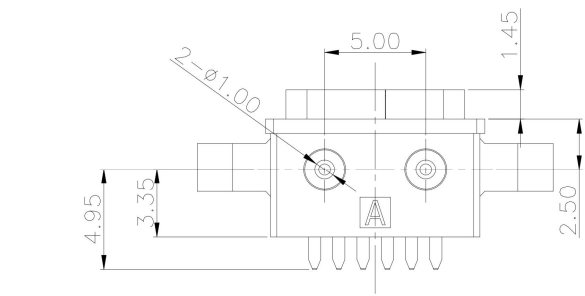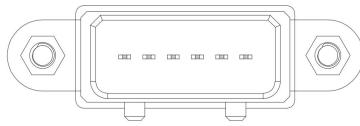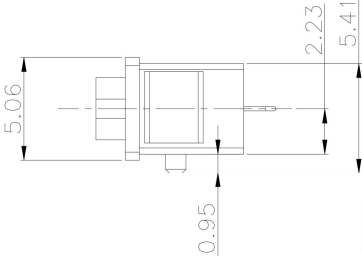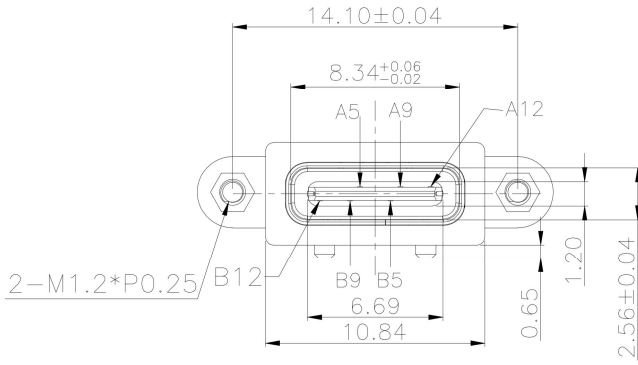

- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY:5000 CYCLES

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	Screw	1	C3604 Ni Plating	Ni:40~120u";
4	Shell1	1	SUS304 Ni Plating T=0.25mm	Ni:40~120u";
3	M-D2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze_C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

X.	± 0.50	X. °	$\pm 2^{\circ}$	UNITS
.X	± 0.30	.X°	$\pm 1^{\circ}$	mm
.XX	± 0.10	.XX°	$\pm 0.5^{\circ}$	MAT' L
.XXX	± 0.05			
		FINISH		
		Q' TY		

XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

PART NO.	TITLE:
XB-USB-C-6P-1120-6PIN-IPX7	TYPEC 6Pin主式插件 带耳朵 M1.2螺母
APPD:	DWG NO. :
GAO. PENG	XB-USB-C-6P-1120-6PIN-IPX7
CHKD:	
HE. LONG. FEI	
DR:	
PANG. DONG	
	SCALE SHEET REV.
	1/1 1/2 A1