


REV.	ECN. NO.	APPD.





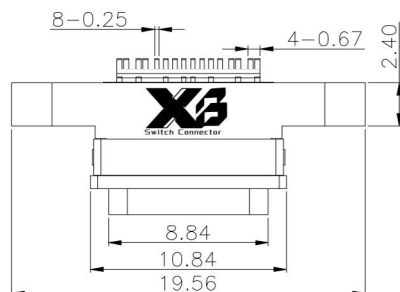


INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	DP1	DN1	SBU1	VBUS			GND
GND			VBUS	SBU2	DN2	DP2	CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A1&B12	A4&B9	B8	A5	B7	A6	A7	B6	A8	B5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	SBU2	CC1	DN2	DP1	DN1	DP2	SBU1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12

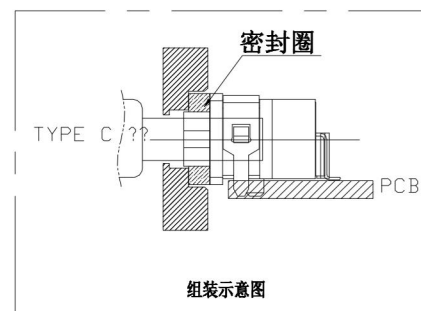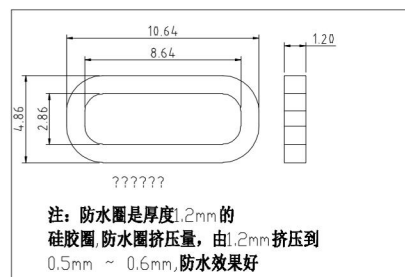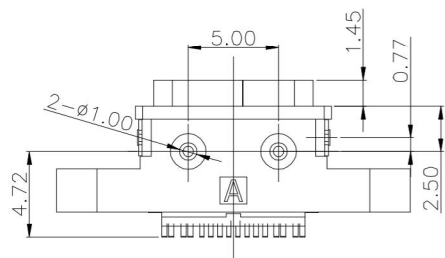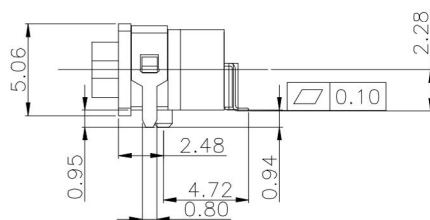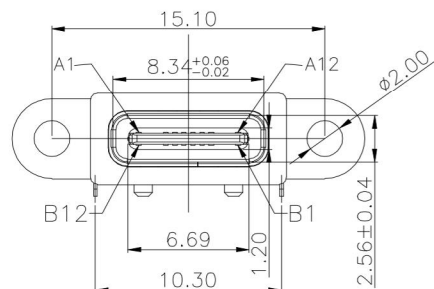

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL :
 - 3-1. CONTACT CURRENT RATING :
5A(VBUS PIN 1.5A/PIN),
5A(GND PIN 1.25A/PIN MAX), 0.25A/PIN(OTHER PIN).
 - 3-2. INSULATION RESISTANCE :
100 MEGA OHMS MIN. AT 250VDC.
 - 3-3. DIELECTRIC WITHSTANDING VOLTAGE :
100VAC MIN.
 - 3-4. LOW LEVEL CONTACT RESISTANCE :
INITIAL 40mΩ MAX.
AFTER 50mΩ MAX.
4. MECHANICAL CHARACTERISTICS :
 - 4-1. MATING FORCE: 5~20N;
 - 4-2. UNMATING FORCE: 8~20N(INITIAL), 6~20N(AFTER 10000 CYCLES);
 - 4-3. DURABILITY : 10,000 MATING CYCLES.
 - 4-4. OPERATING TEMPERATURE : -40°C TO +80°C

TABLE 1:

⑥	Shell-2	1	Stainless steel	NI PLATING;	T=0.20mm
⑤	Shell-1	1	Stainless steel	NI PLATING;	T=0.25mm
④	MID PLATE	1	Stainless steel		T=0.15mm
③	Terminal-B	8	铜镍硅合金	Au:3u" PLATING;	T=0.15mm
②	Terminal-A	8		Au:3u" PLATING;	T=0.15mm
①	Housing	1		HIGH TEMP	Black
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK

X.	± 0.50	X.*	$\pm 2^\circ$
.X	± 0.30	.X*	$\pm 1^\circ$
.XX	± 0.10	.XX*	$\pm 0.5^\circ$
.XXX	± 0.05		

UNITS	mm
MAT'L	

FINISH

0.1

	Q'TY	UNIT PRICE	TOTAL AMOUNT
100	100	100	100

A graph showing a linear function on a Cartesian coordinate system. The line has a positive slope and is labeled with the equation $y = 2x + 3$.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

	PART	M
--	------	---

- C-16P-1119-U-TPX7

APPT:

GAO, PENG

CHKD:

HE LONG FEI

DR:

PANG, DONG

TITLE:

C 16Pin SMT Type带耳朵,带外壳

DWG №.:

B-C-16P-1119-U-IPX7



SCALE	SHEET	REV.
1/1	1/2	A1