
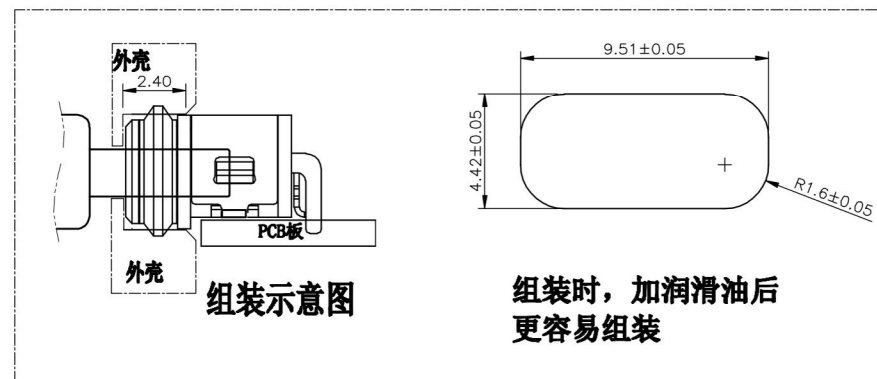
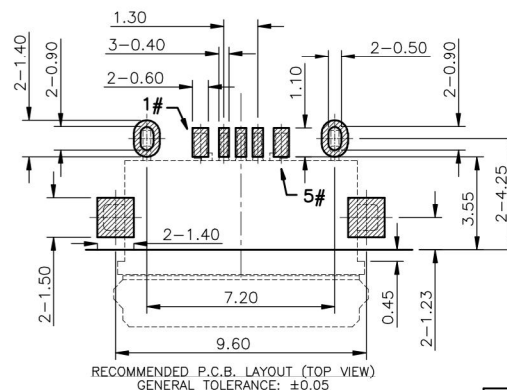
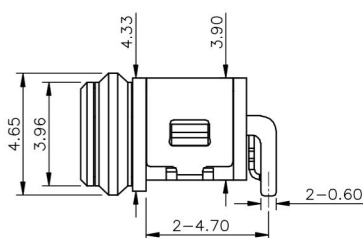



Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

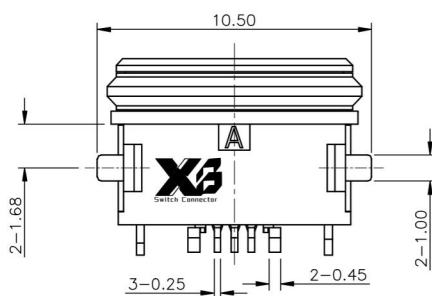

⑦	Oval ring	1	Rubber	Black
⑥	Glue	1	-----	Black
⑤	J-shaped frame	1	Copper alloy or stainless	Nickel plated
④	Inner shell	1	Copper alloy or stainless	Nickel plated
③	Terminal	5	Copper alloy, 0.15t	Gold Plated On Contact Area.
②	Outer shell	1	High temperature thermoplastic	Black
①	Body	1	High temperature thermoplastic	Black
NO. DESCRIPTION QTY		MATERIAL		REMARK

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1.1. RATING: 3A(PIN1&5),0.5A(PIN2&3&4);
- 1.2. CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
- 1.3. DIELECTRIC WITHSTANDING: 500V AC MIN.;
- 1.4. INSULATION RESISTANCE: 1000MΩ MIN.;
2. DURABILITY: 10,000 CYCLES MIN.;
3. INSERTION FORCE: 3.5Kg_f (35N) Max.;
4. EXTRACTION FORCE: 0.8Kg_f (8N) Min.;
5. WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX7(1m,30min)
6. PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
7. PACKAGING: TAPE & REEL.

This document is the property of
Xi Bang Electronic Technology
Co., Ltd.

Unless otherwise specified, Tolerance:	
X.	±0.30
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10
Angles	±3°



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

DESIGN	GAO. PENG	DATE	2017.09.21	TITLE: MICRO USB 2.0 B TYPE RECEPTACLE CUSTOMER DRAWING
CHECKED	HE. LONG. FEI	DATE		
APPROVED	PANG. DONG	DATE		
PART NO.	XB-USB-M-5P-1188S-IPX7			REV.: X1
DRAWING NO.				SCALE: 6:1
				UNIT: mm
				SIZE: A4
				SHEET: 1/1
				