

F

E

D

C

B

A

F


E

D

C

B

A

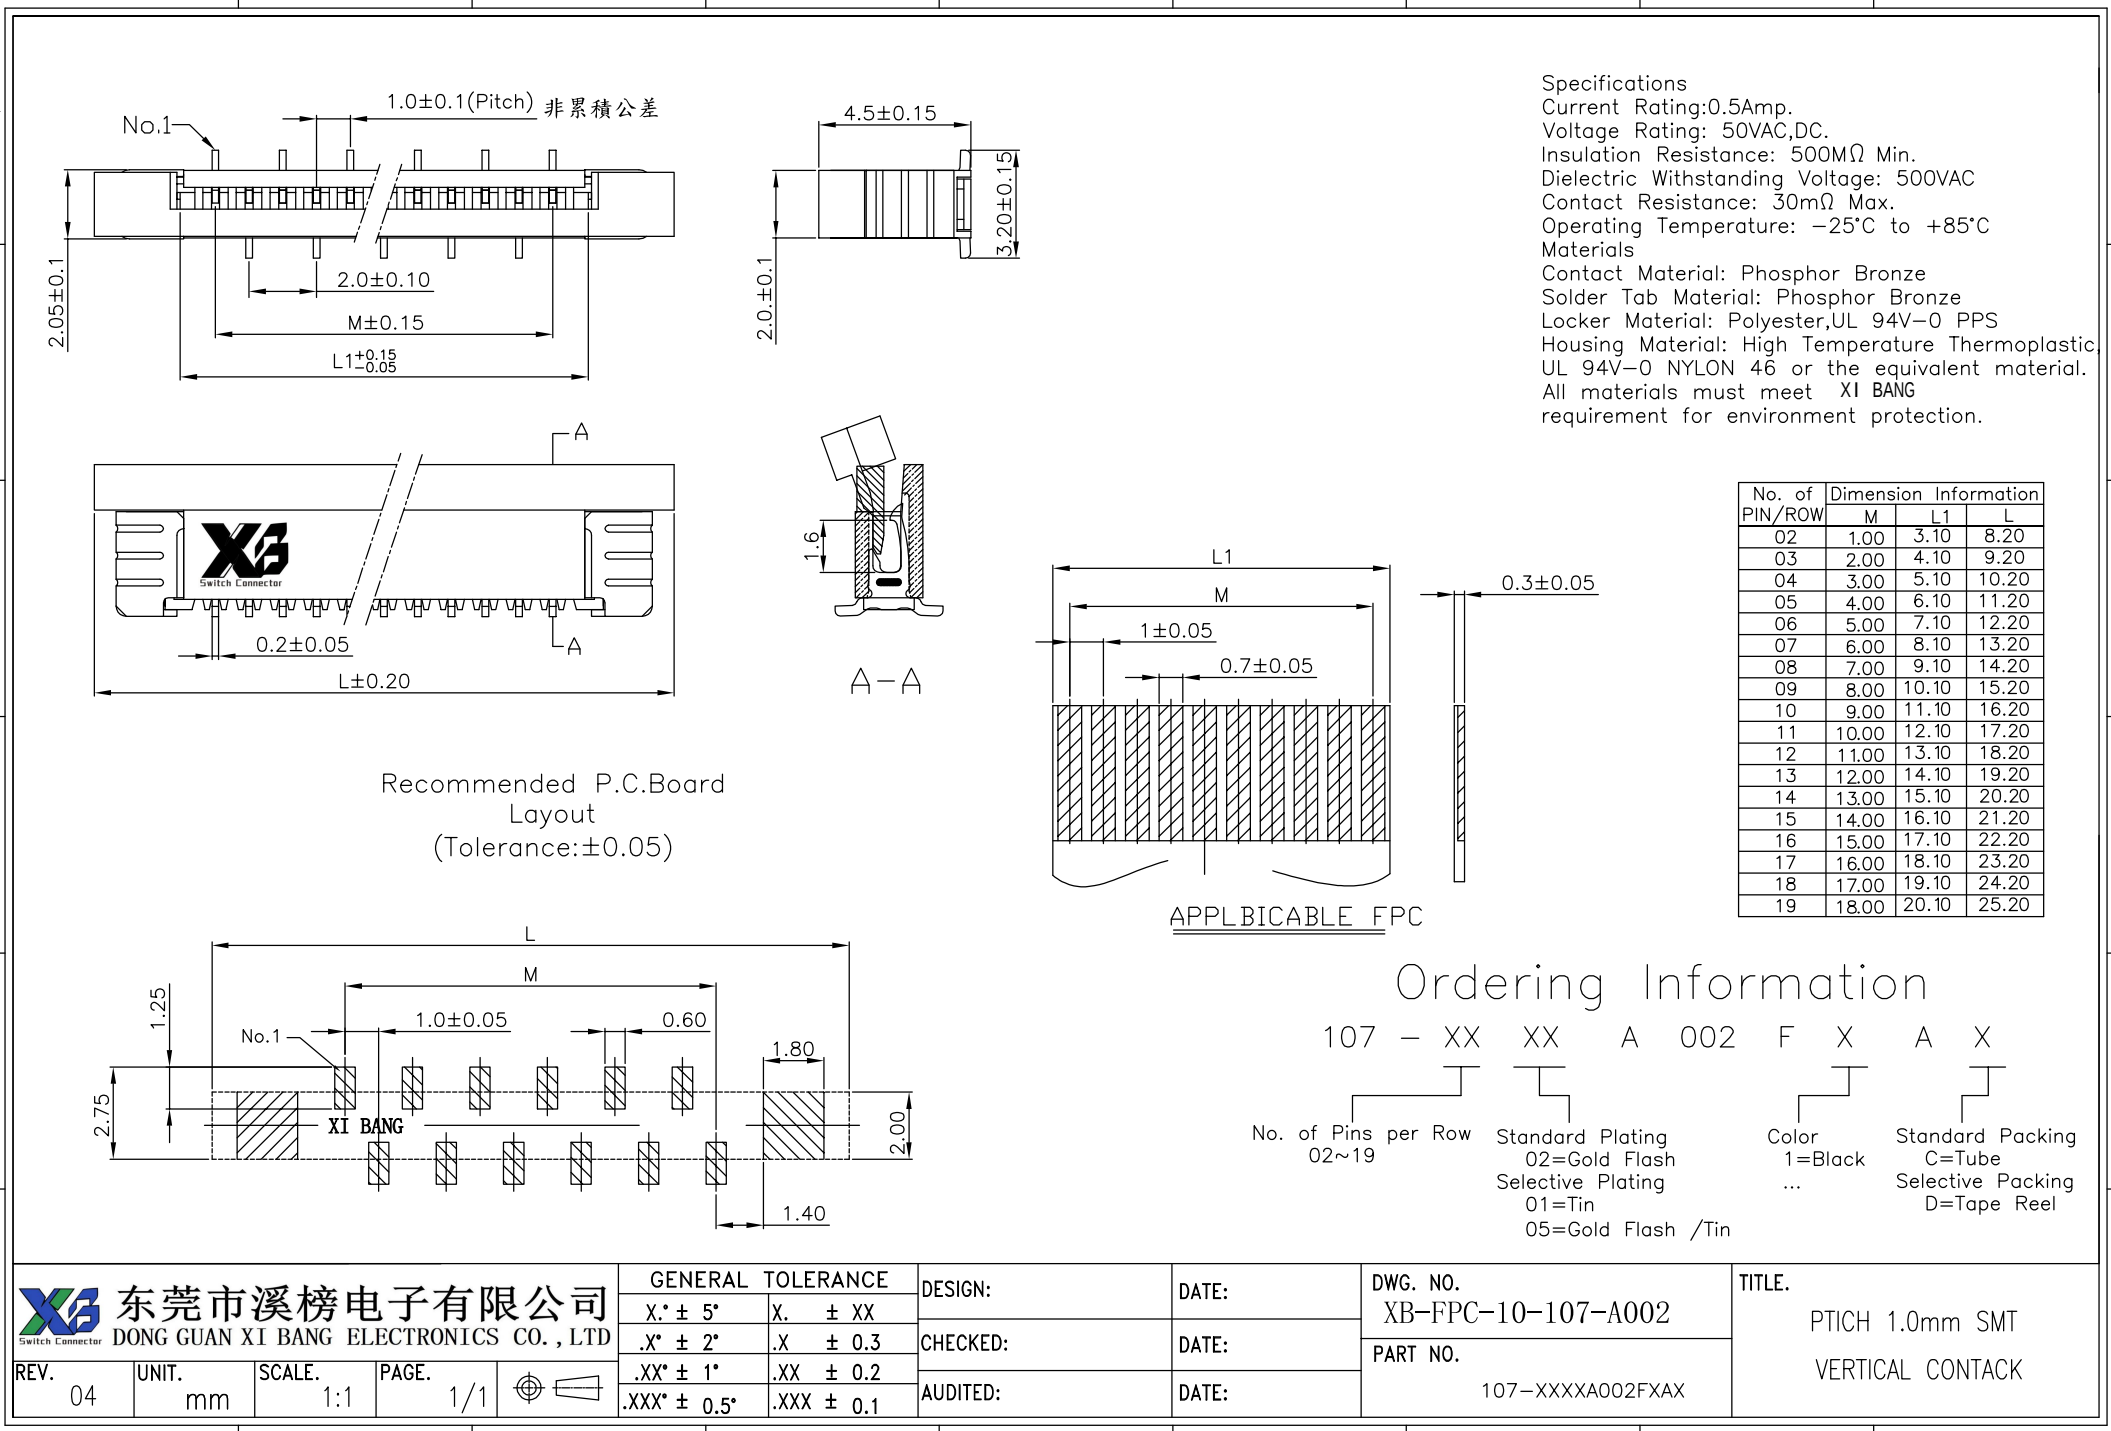

Specifications
Current Rating:0.5Amp.
Voltage Rating: 50VAC,DC.
Insulation Resistance: 500M Ω Min.
Dielectric Withstanding Voltage: 500VAC
Contact Resistance: 30m Ω Max.
Operating Temperature: -25°C to +85°C
Materials
Contact Material: Phosphor Bronze
Solder Tab Material: Phosphor Bronze
Locker Material: Polyester,UL 94V-0 PPS
Housing Material: High Temperature Thermoplastic
UL 94V-0 NYLON 46 or the equivalent material.
All materials must meet XI BANG
requirement for environment protection.

No. of PIN/ROW	Dimension Information		
	M	L1	L
02	1.00	3.10	8.20
03	2.00	4.10	9.20
04	3.00	5.10	10.20
05	4.00	6.10	11.20
06	5.00	7.10	12.20
07	6.00	8.10	13.20
08	7.00	9.10	14.20
09	8.00	10.10	15.20
10	9.00	11.10	16.20
11	10.00	12.10	17.20
12	11.00	13.10	18.20
13	12.00	14.10	19.20
14	13.00	15.10	20.20
15	14.00	16.10	21.20
16	15.00	17.10	22.20
17	16.00	18.10	23.20
18	17.00	19.10	24.20
19	18.00	20.10	25.20

Ordering Information

107 - XX XX A 002 F X A X

No. of Pins per Row 02~19 Standard Plating 02=Gold Flash Color 1=Black Standard Packing C=Tube
Selective Plating 01=Tin ... Selective Packing D=Tape Reel
05=Gold Flash /Tin

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD					GENERAL TOLERANCE		DESIGN:	DATE:	DWG. NO. XB-FPC-10-107-A002	TITLE. PTICH 1.0mm SMT VERTICAL CONTACT
					X.* ± 5°	X. ± XX				
REV.	UNIT.	SCALE.	PAGE.		.X* ± 2°	.X ± 0.3	CHECKED:	DATE:	PART NO. 107-XXXXA002FXAX	
					.XX* ± 1°	.XX ± 0.2	AUDITED:	DATE:		
04	mm	1:1	1/1		.XXX* ± 0.5°	.XXX ± 0.1				